RoHS COMPLIANT

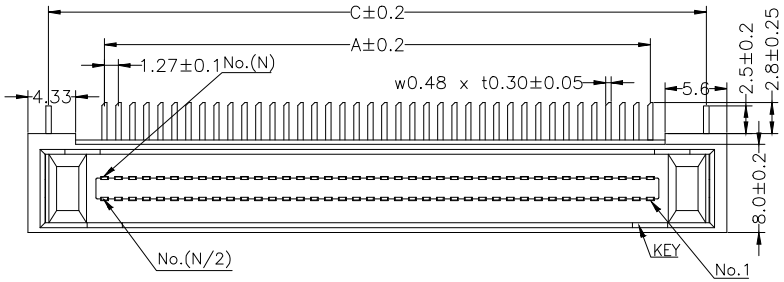

Pin	Dimension mm		
	A	B	C
30	17.78	31.7	27.94
40	24.13	38	34.29
50	30.48	44.4	40.64
60	36.83	50.7	46.99
80	49.53	63.4	59.69
100	62.23	76.1	72.39
120	74.93	88.8	85.09

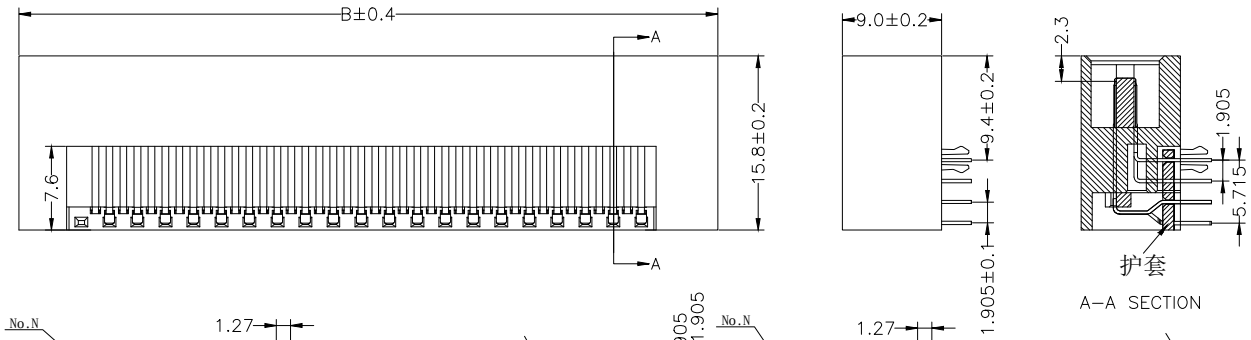

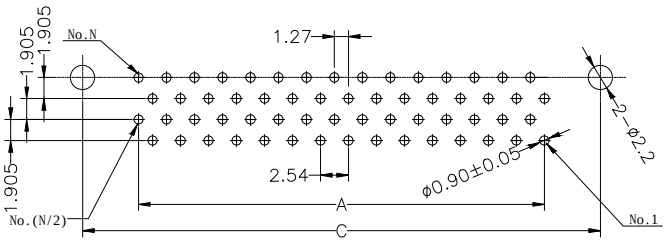

P.C.BOARD LAYOUT
(40,60,80,100,120Pin)

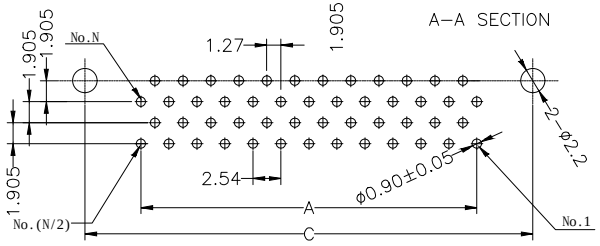

P.C.BOARD LAYOUT
(30,50Pin)

Voltage Current Rating:1 AMP.
Dielectric Withstanding Voltage:500V AC
Contact Resistance:20mΩ Max.
Insulation Resistance:500MΩ Min.
Temperature Range:–20℃ to +85℃

PART NO.:
B22–XXX61NCN–01
NO.OF PIN:
20: 20P
≀
120: 120P

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
3	BOARDLOCKS	COPPER ALLOY	PLATING: Tin	
2	HOUSING	PBT+30%GF	COLOR: BLACK	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 3u" SOLDER AREA: Sn UNDER–PLATING: Ni	

SIDE	DATE	DESCRIPTION	APPROVER
3			
2			
1	2019/10/09	新版发行	King Zhou

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance	
x.	±0.80
.x	±0.50
.xx	±0.25

NAME:	OPS MALE 90度DIP加强型 (客户用图)				PART NO.	B22–XXX51NCN–01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2019/10/09	DAWN HU	KING ZHOU		B22–004

Lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769–85181660 85181770