


RoHS

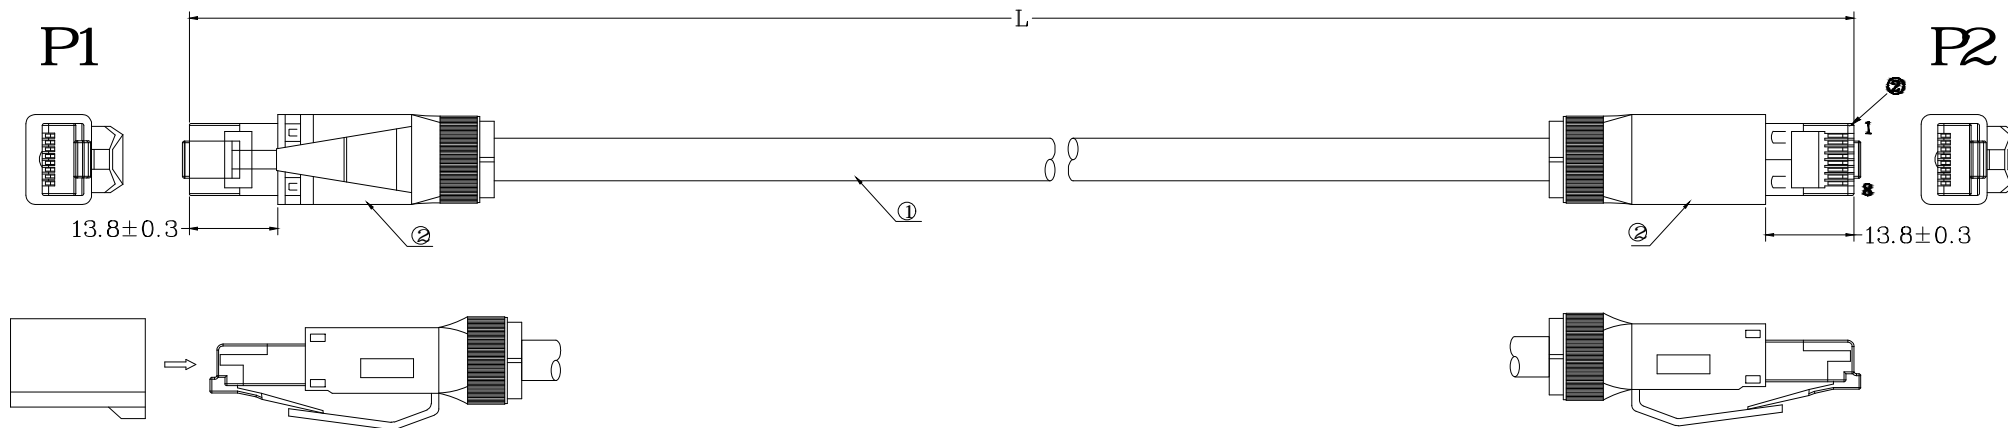

CONNECTION

| P 1 | | P 2 |
|-------|----------------|-------|
| 1 | ORANGE / WHITE | 1 |
| 2 | ORANGE | 2 |
| 3 | GREEN / WHITE | 3 |
| 6 | GREEN | 6 |
| 4 | BLUE | 4 |
| 5 | BLUE / WHITE | 5 |
| 7 | BROWN / WHITE | 7 |
| 8 | BROWN | 8 |
| SHELL | BRAID | SHELL |

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 10M OHMS MIN, AC 500V 0.01sec.
4. INSTANT BREAK :3 SECONDS.
5. THE DIMENSIONS MUST MEET THE SURFACE REQUIREMENTS.
6. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.
7. APPEARANCE OF NO DIRT, DAMAGE, SCRATCH, DEFORMATION AND OTHER UNDESIRABLE PHENOMENA.

| 2 | CONN | RJ45 CONNECTOR,8P8C.WITH SHELL.ASSEMBLY TYPE | 2PCS |
|------|-----------|--|------|
| 1 | CABLE | CAT. 5 4P×26AWG,DD6.5高柔拖链电缆 | |
| ITEM | PART NAME | DESCRIPTION | QY'T |

| | | | | | | | | | | | | | | |
|---|------------|------|-------------|-------------------|-----------|--------|-------------------------|------|---------------|-----------------|---|-----------|--------|-------------|
| △ | | | | QUALITY SYMBOLS | Tolerance | | NAME: 工业相机网线8P8C (客户用图) | | PART NO. | A10-00813XXX-02 | | | | |
| △ | | | | □: ☒: | 尺寸(MM) | 公差(MM) | REV: | A | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. |
| △ | 2018/09/11 | 新版发行 | | CRITICAL MAJOR | 300~2000 | ±50 | SCALE: | NONE | DATE: | 2018/09/11 | Jing Li | Jack Chen | | A10-002 |
| | SIDE | DATE | DESCRIPTION | APPROVER | ▽: ▽: | 5001~ | | | | | | | | |
| | | | | ZERO DEFECT S.P.C | | | | | 东莞市林诚塑胶电子有限公司 | | http://www.lineconn.com TEL:0769-85181660 85181770 | | | |