
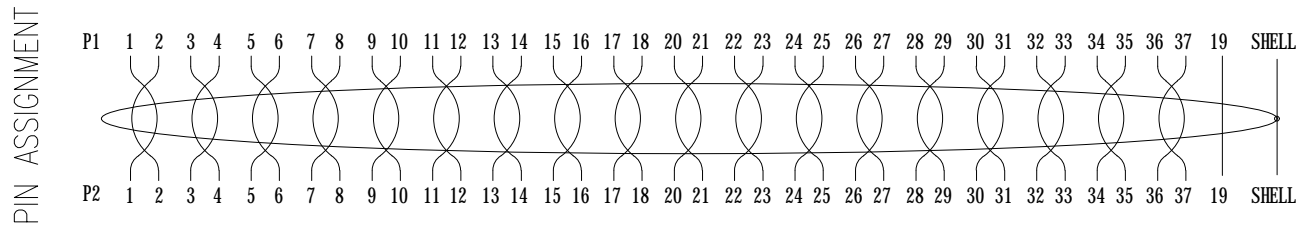


RoHS

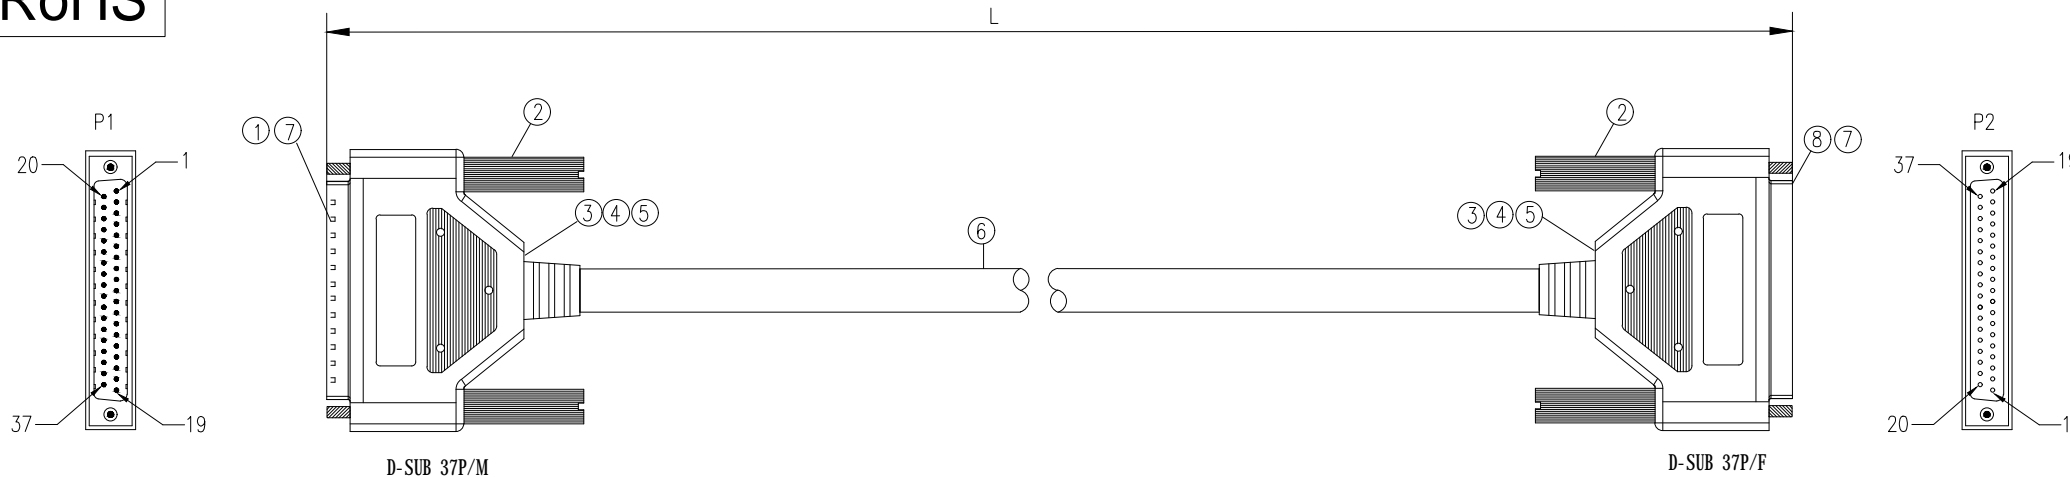

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

8	CONNECTOR	D-SUB 37Pin Female Solder TYPE	1PCS
7	防尘盖	37Pin-防尘盖-PE	2PCS
6	CABLE	UL20276 28AWG*18P+28AWG*1C+AED PVC JACKET COLOR:BLACK OD=8.0mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	50P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	SCREW	SCREW 4-40# Ni(大E33 BK)	4PCS
1	CONNECTOR	D-SUB 37Pin Male Solder TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

△				QUALITY SYMBOLS
△				□: ☒: △: ▽:
△	2018/01/06	新版发行	Jack Chen	CRITICAL MAJOR ZERO DEFECT S.P.C
SIDE	DATE	DESCRIPTION	APPROVER	

Tolerance		NAME: D-SUB 37P Male To 37P Female Cable (客户用图)		PART NO. A05-03731XXX-01	
尺寸(CM)	公差(CM)	REV: A	UNIT: mm	DRW BY: DAWN HU	CHK BY: KING ZHOU
30~200	±10	SCALE: NONE	DATE: 2018/01/06		APP BY: DRAWING NO. A05-015
201~500	±20	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770			
501~	±30				