
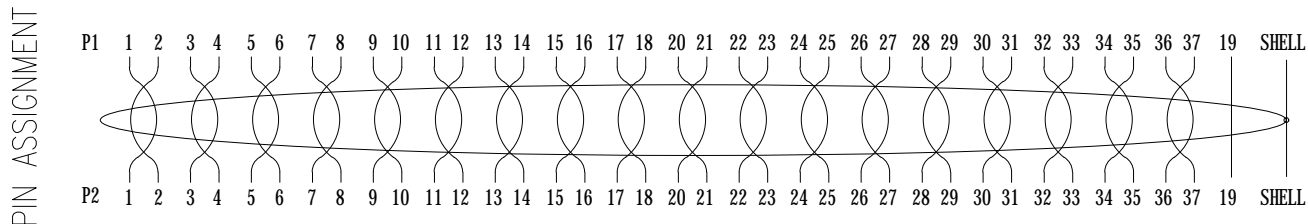


RoHS

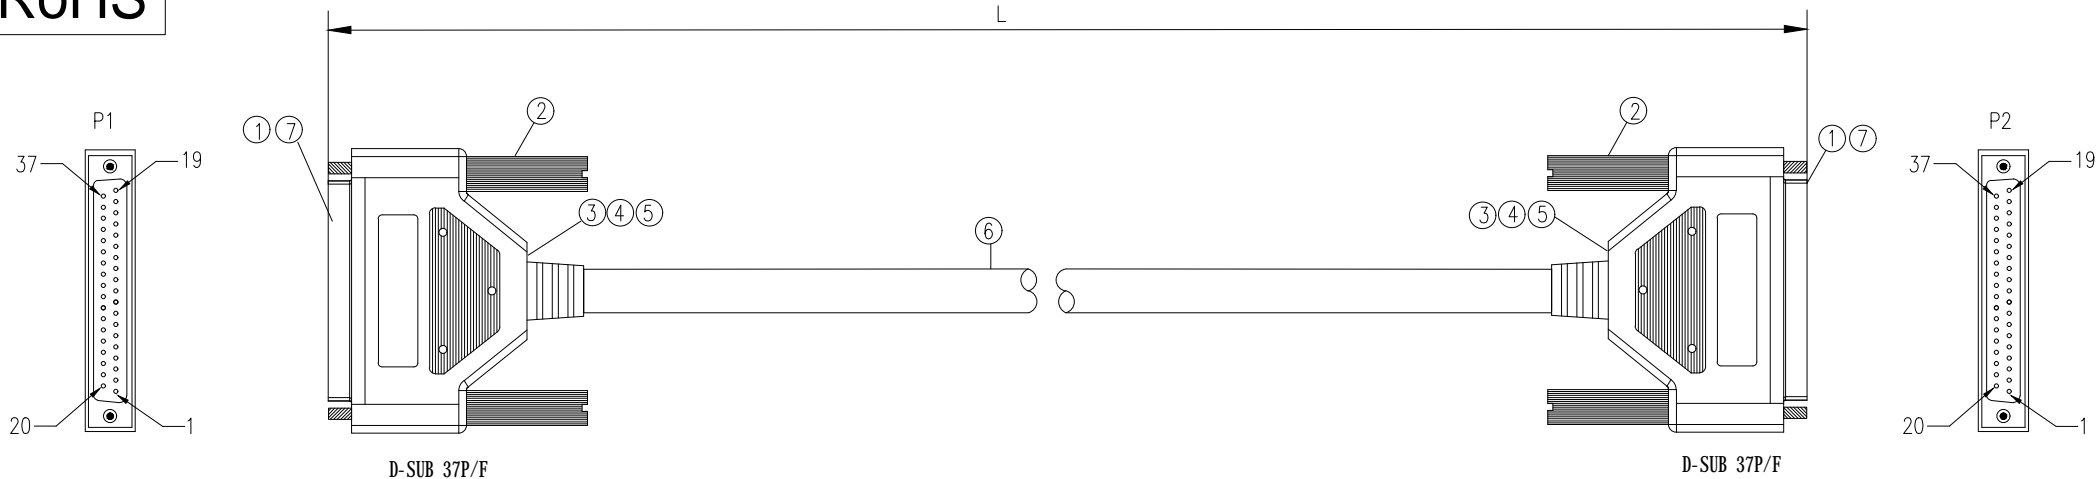

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

7	防尘盖	37Pin-防尘盖-PE	2PCS
6	CABLE	UL20276 28AWG*18P+28AWG*1C+AED PVC JACKET COLOR:BLACK OD=8.0mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	50P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	SCREW	SCREW 4-40# Ni(大 E33 BK)	4PCS
1	CONNECTOR	D-SUB 37Pin Female Solder TYPE	2PCS
ITEM	PART NAME	DESCRIPTION	QY'T

△			
△			
△	2018/01/06	新版发行	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	尺寸(CM)	公差(CM)
CRITICAL	MAJOR	30~200	±10
▽ :	▽ :	201~500	±20
ZERO DEFECT	S.P.C	501~	±30

NAME:	D-SUB 37P Female To 37P Female Cable (客户用图)			PART NO.	A05-03721XXX-01		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	NONE	DATE:	2018/01/06	DAWN HU	KING ZHOU		A05-014
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com			
				TEL:0769-85181660 85181770			
3	2	1					