


RoHS

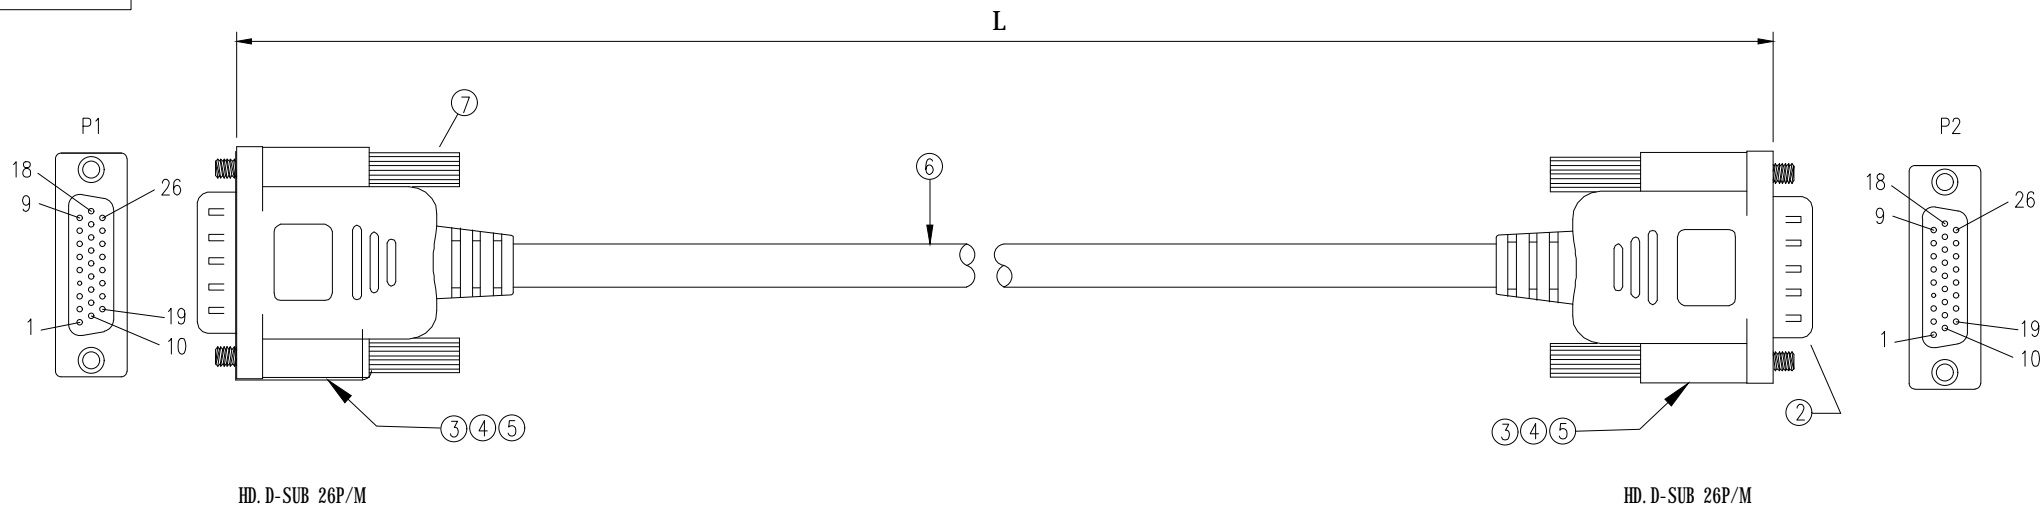


NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

P1	SIGNAL	P2	ITEM	PART NAME	DESCRIPTION	QY'T
1		1	7	SCREW	SCREW 4-40# Ni	4PCS
2		2	6	CABLE	UL2919 28AWG*13P+28AWG*1C+AED PVC JACKET COLOR:BLACK DD=7.5mm	1PCS
3		3	5	COPPER FOIL	COPPER FOIL W=25MM	NA
4~23		4~23	4	OVERMOLD	45P PVC COLOR: BLACK	NA
24		24	3	MOLD	PE	NA
25		25	2	CONNECTOR	HD.D-SUB 26Pin Male Solder BLACK TYPE	1PCS
26		26	1	CONNECTOR	HD.D-SUB 26Pin Male Solder BLACK TYPE	1PCS
Shell		Shell				

△				QUALITY SYMBOLS	Tolerance	NAME:	HD.D-SUB 26P Male To 26P Male Cable (客户用图)	PART NO.	A04-02611XXX-01
△				□: ☒:	尺寸(CM)	REV:	A	UNIT:	mm
△	2018/05/24	新版发行	JACK CHEN	CRITICAL MAJOR	公差(CM)	SCALE:	NONE	DATE:	2018/05/24
SIDE	DATE	DESCRIPTION	APPROVER	▽: ▽:	30~200			DRW BY	JACK CHEN
				ZERO DEFECT S.P.C	501~			CHK BY	KING ZHOU
					±10			APP BY	
					±20			DRAWING NO.	A04-004
					±30				

 东莞市林诚塑胶电子有限公司
<http://www.lineconn.com>
 TEL:0769-85181660 85181770