



RoHS

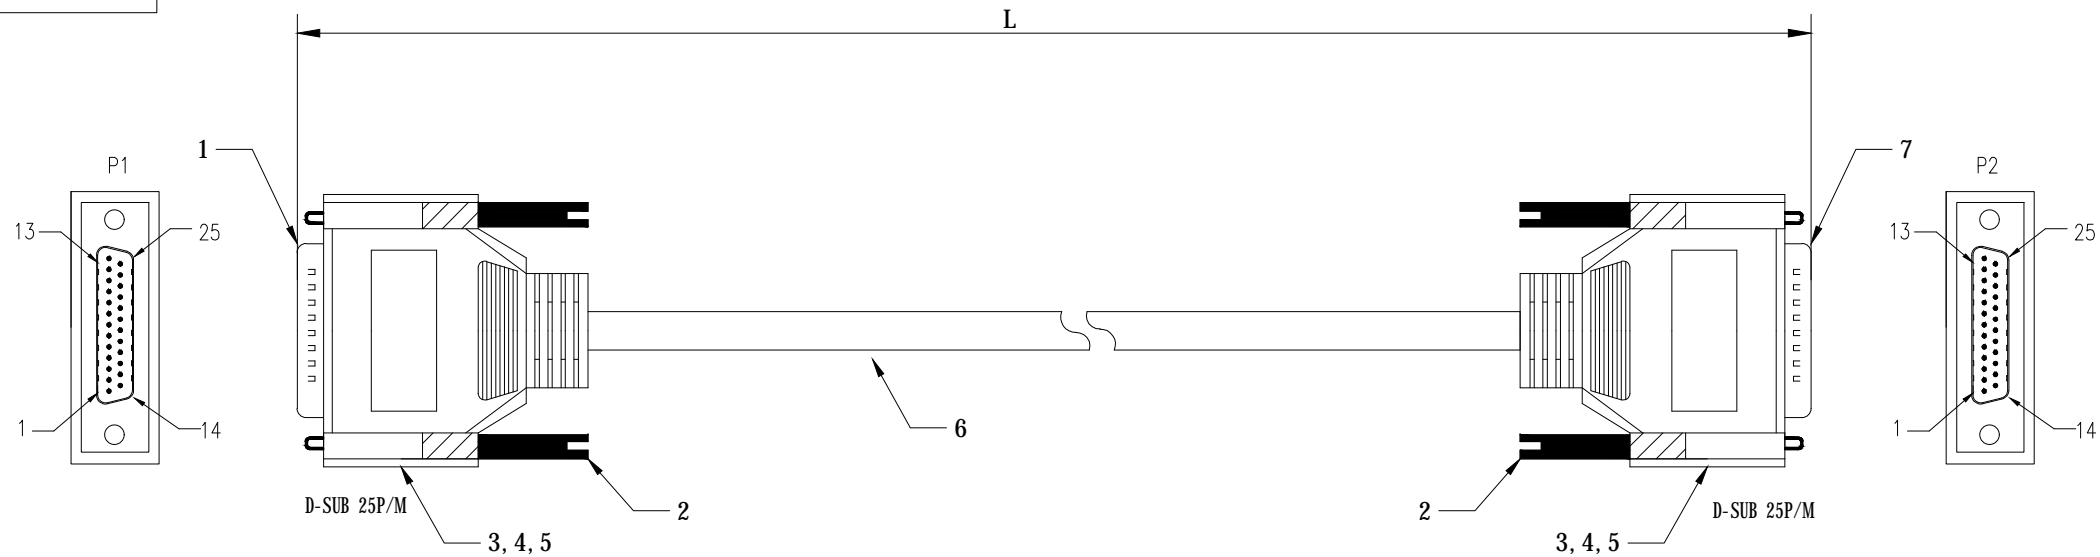

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

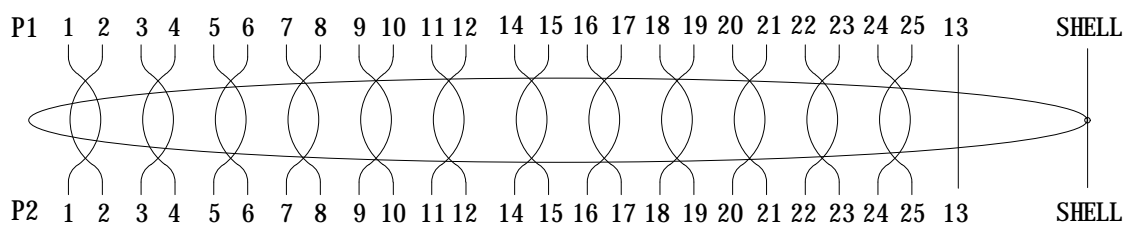

7	CONNECTOR	DB25Pin Male Solder BLACK TYPE	1PCS
6	CABLE	UL2919 28AWG*13P+AED PVC JACKET COLOR:BLACK OD= 7.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	SCREW	SCREW 4-40# Ni (大 E33BK)	4PCS
1	CONNECTOR	DB25Pin Male Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

A	△			QUALITY SYMBOLS	Tolerance		NAME: D-SUB 25P Male To 25P Male Cable (客户用图)			PART NO.	A05-02511XXX-01			
	△			□: ☒:	尺寸(CM)	公差(CM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2018/05/24	新版发行	CRITICAL MAJOR	30~200	±10	SCALE:	NONE	DATE:	2018/05/24	DAW NHU	KING ZHOU		A05-012
	△			▽: ▽:	201~500	±20	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	501~								
	8	7	6	5	4	3	2	1						