
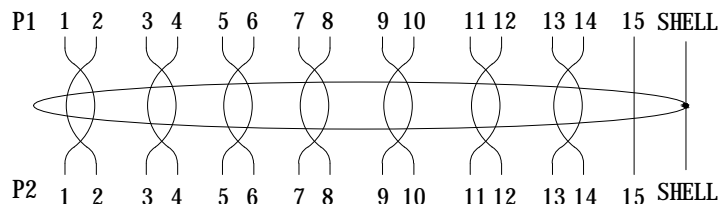


RoHS

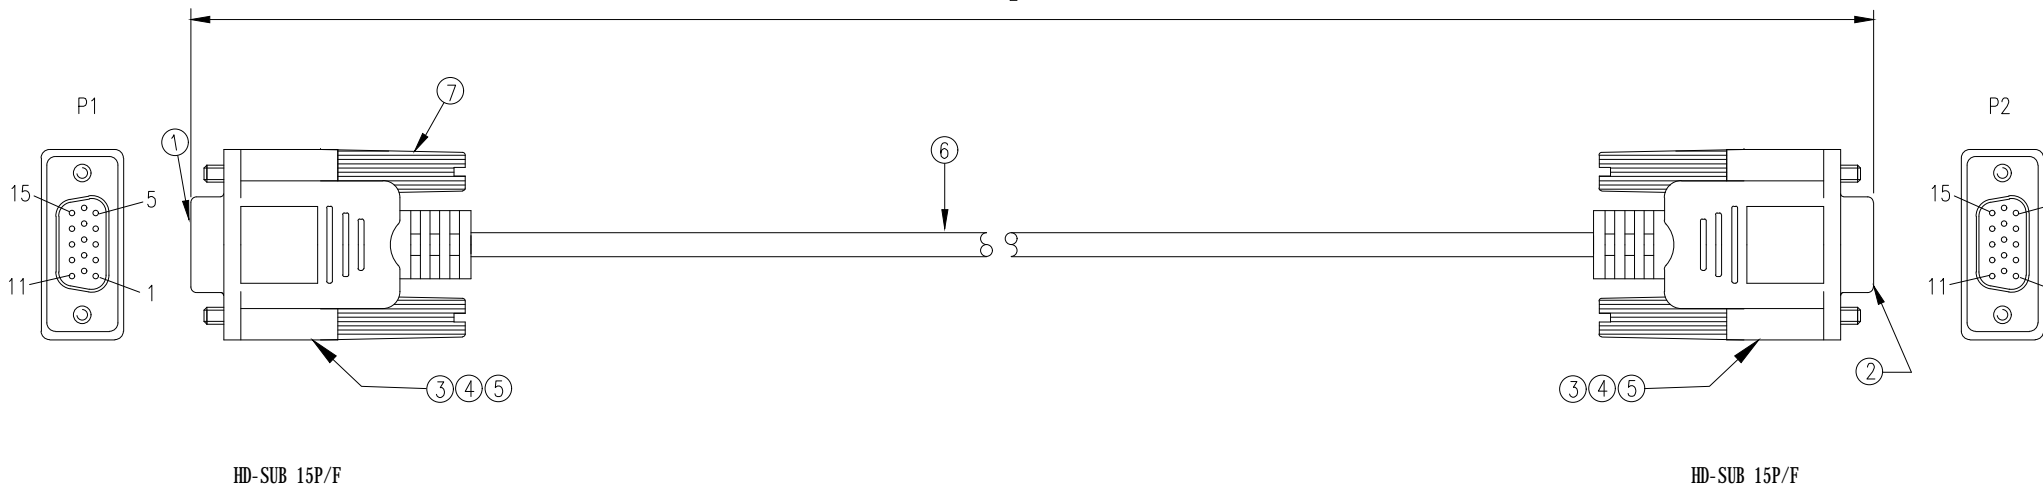

PIN ASSIGNMENT

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

| | | | |
|------|-------------|--|------|
| 7 | SCREW | SCREW 4-40# Ni(大 E33 BLACK) | 4PCS |
| 6 | CABLE | UL2919 28AWG*7P+28AWG*1C+AEB PVC JACKET COLOR:BLACK OD= 7.5mm | 1PCS |
| 5 | COPPER FOIL | COPPER FOIL W=25MM | NA |
| 4 | OVERMOLD | 45P PVC COLOR: BLACK | NA |
| 3 | MOLD | PE | NA |
| 2 | CONNECTOR | HD-SUB 15Pin Female Solder BLACK TYPE | 1PCS |
| 1 | CONNECTOR | HD-SUB 15Pin Female Solder BLACK TYPE | 1PCS |
| ITEM | PART NAME | DESCRIPTION | QY'T |

| | | | | | | | | | | | | | | | |
|---|------|------------|-------------|-----------|----------------------|-----------|--------|---------------|--|-------|---|-----------|-----------------|--------|-------------|
| A | △ | | | | QUALITY SYMBOLS | Tolerance | | NAME: | HD.D-SUB 15P Female To 15P Female Cable (客户用图) | | | PART NO. | A04-01521XXX-01 | | |
| | △ | | | | □: ☒: | 尺寸(CM) | 公差(CM) | REV: | A | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. |
| | △ | 2018/04/07 | 新版发行 | | CRITICAL MAJOR | 30~200 | ±10 | SCALE: | NONE | DATE: | 2018/04/07 | Jack Chen | Hua Guan | | A04-002 |
| | △ | | | Jack Chen | ▽: ▽: | 201~500 | ±20 | | | | | | | | |
| | SIDE | DATE | DESCRIPTION | APPROVER | ZERO DEFECT S.P.C | 501~ | ±30 | 东莞市林诚塑胶电子有限公司 | | | http://www.lineconn.com TEL:0769-85181660 85181770 | | | | |