


RoHS

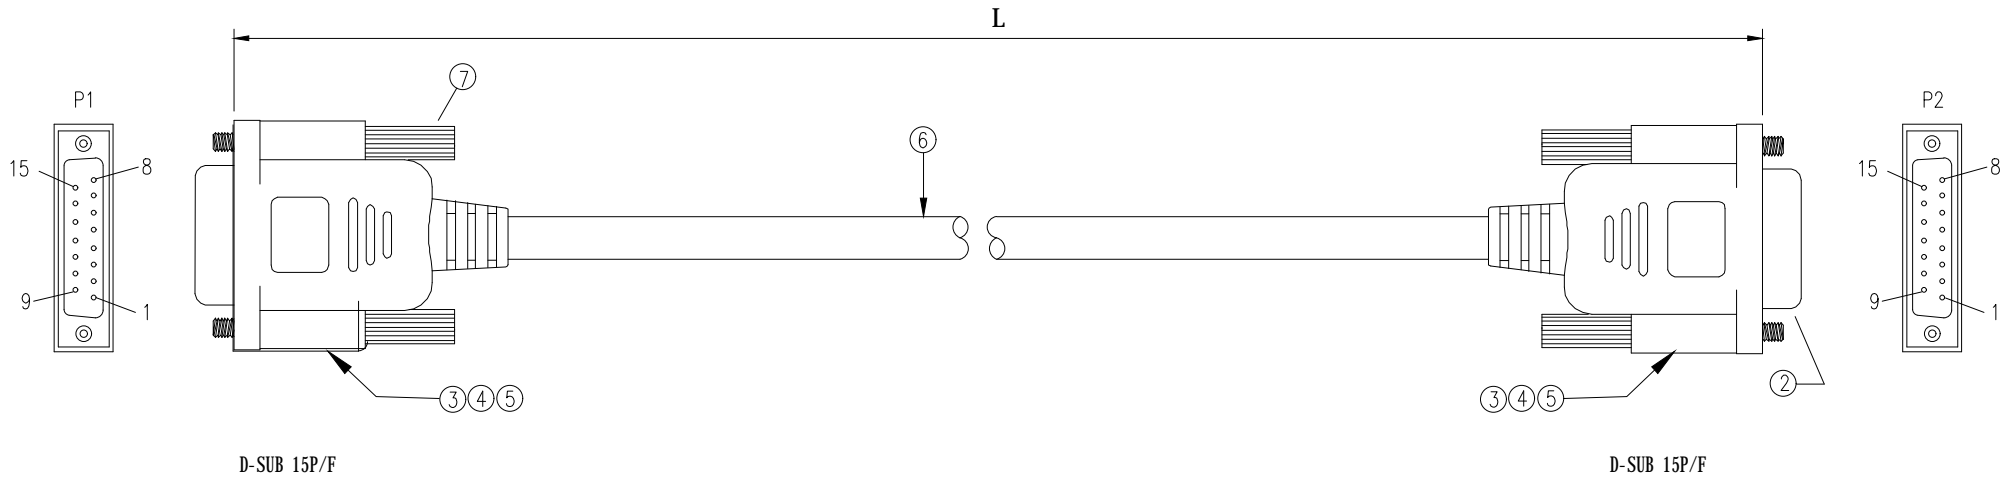


D-SUB 15P/F

D-SUB 15P/F

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

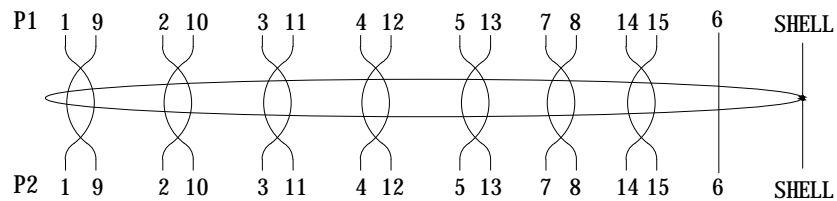

7	SCREW	SCREW 4-40# Ni	4PCS
6	CABLE	UL2464 28AWG*7P+28AWG*1C+AED PVC JACKET COLOR:GERY OD=7.5mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	D-SUB 15Pin Female Solder BLACK TYPE	1PCS
1	CONNECTOR	D-SUB 15Pin Female Solder BLACK TYPE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

A	△			QUALITY SYMBOLS	Tolerance		NAME: D-SUB 15P Female To 15P Female Cable (客户用图)			PART NO.	A05-01522XXX-01			
	△			□: ☒:	尺寸(CM)	公差(CM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2018/05/24	新版发行	CRITICAL MAJOR	30~200	±10	SCALE:	NONE	DATE:	2018/05/24	JACK CHEN	KING ZHOU		A05-009
	△			▽: ▽:	201~500	±20	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	501~								
	8	7	6	5	4	3	2	1						