


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

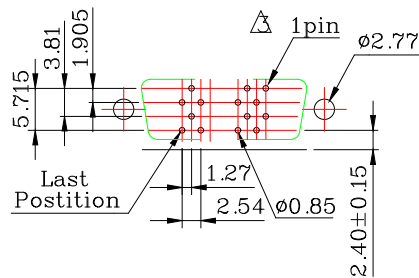

PCB Layout

4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	COPPER ALLOY T=0.3mm	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

△	2021/09/29	修正错误pin位标示,增加PCB layout pin位标注	Jack Chen
△	2021/09/29	修正公差,品名,料号	Jack Chen
△	2010/10/11	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	.x	±0.60
CRITICAL	MAJOR	.x	±0.40
∇ :	∇ :	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		SCSI 100P母头180度直插			PART NO.		B03-100811EB-0L	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2010/10/11	Huangmei	Jack Chen		B03-013	
东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770				