


RoHS

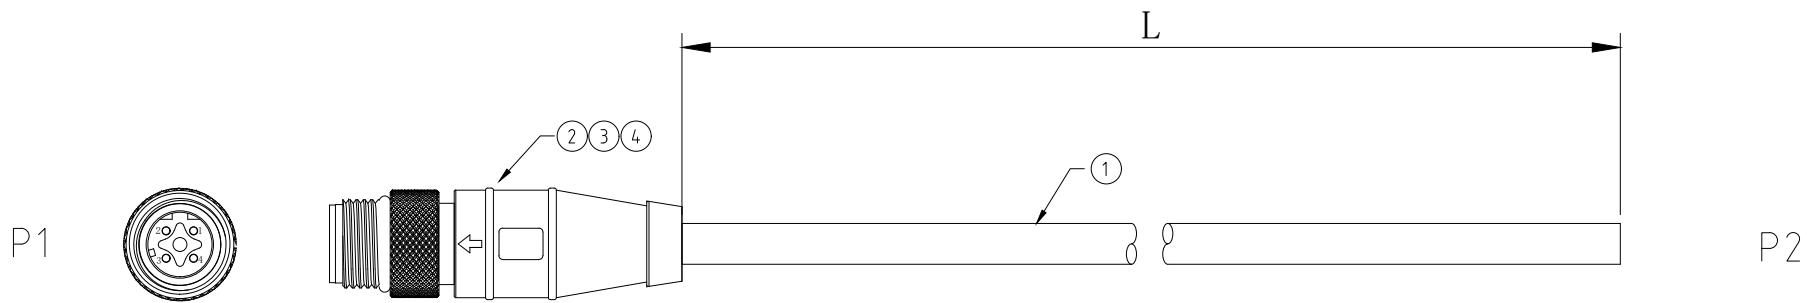


PIN ASSIGNMENT

| P1 | WIRE COLOR | P2 |
|-------|------------|-------|
| 1 | _____ | _____ |
| 2 | _____ | _____ |
| 3 | _____ | _____ |
| 4 | _____ | _____ |
| SHELL | _____ | _____ |

- NOTES:
1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

| 4 | PE | PE | NA |
|------|-----------|---|------|
| 3 | OVERMOLD | BLACK PVC 45P | NA |
| 2 | CONN | M12 4P MALE D CODE SOLER MOLDED TYPE WITH SHIELD(B10-M120T04D-01) | 1PCS |
| 1 | CABLE | UL2464 2P*24AWG+AB,PVC JACKET COLOR:BLACK,OD=5.6 | NA |
| ITEM | PART NAME | DESCRIPTION | QY'T |

| | | | | QUALITY SYMBOLS | | Tolerance | | NAME: M12 4P male D code to open with shield | | | | PART NO. A27-00451XXX-D0 | | | |
|------|------------|-------------|-----------|-----------------|-------|-----------|--------|--|------|-------|------------|--------------------------|-----------|--------|-------------|
| | | | | □ : | ☒ : | 尺寸(MM) | 公差(MM) | REV: | A | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. |
| △ | | | | CRITICAL | MAJOR | 300~2000 | ±50 | SCALE: | NONE | DATE: | 2023/09/10 | Lei Fan | Jack Chen | | A27-004 |
| △ | 2023/09/10 | First issue | Jack Chen | ▽ : | ▽ : | 2001~5000 | ±100 |  东莞市林诚塑胶电子有限公司 http://www.lineconn.com | | | | | | | |
| SIDE | DATE | DESCRIPTION | APPROVER | ZERO DEFECT | S.P.C | 5001~ | ±150 | TEL:0769-85181660 85181770 | | | | | | | |