


RoHS

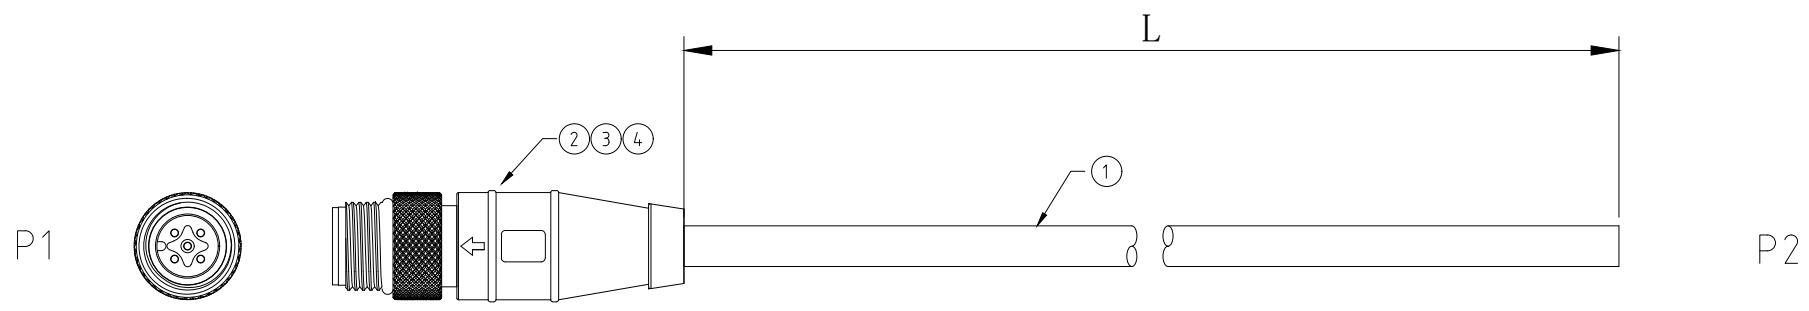


PIN ASSIGNMENT

P1	WIRE COLOR	P2
1	_____	_____
2	_____	_____
3	_____	_____
4	_____	_____
5	_____	_____
SHELL	_____	_____

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

4	PE	PE	NA
3	OVERMOLD	BLACK PVC 45P	NA
2	CONN	M12 5P MALE A CODE SOLER MOLDED TYPE WITH SHIELD(B10-M120T05A-01)	1PCS
1	CABLE	5C*0.2+ADB ,JACKET:PVC,COLOR:BLACK, OD= 5.5mm	NA
ITEM	PART NAME	DESCRIPTION	QY'T

A		B		C		D		E		F			
△													
△	2023/09/10	First issue	Jack Chen	QUALITY SYMBOLS	Tolerance	NAME:	M12 5P male A code to open with shield	PART NO.	A27-00551XXX-A0				
SIDE	DATE	DESCRIPTION	APPROVER	□: CRITICAL	尺寸(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				△: MAJOR	公差(MM)	SCALE:	NONE	DATE:	2023/09/10	Lei Fan	Jack Chen		A27-005
				▽: ZERO DEFECT	300~2000 ±50	 东莞市林诚塑胶电子有限公司 <a href="http://www.lineconn.com">http://www.lineconn.com</a> TEL:0769-85181660 85181770							
				▽: S.P.C	2001~5000 ±100								
					5001~ ±150								