



P1

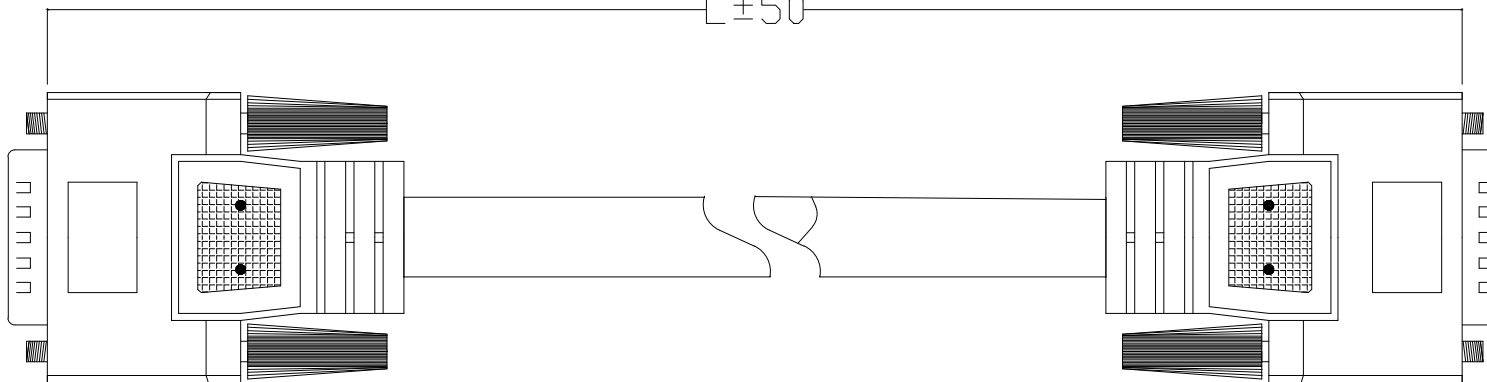

P2



NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~57		4~57
58		58
59		59
60		60
Shell		Shell

3	CABLE	UL20276 28AWG*34P+AL+BRAID PVC JACKET COLOR:BLACK OD= 10.0mm	1PCS
2	SCREW	SCREW 4-40# Ni GARE	4PCS
1	CONNECTOR	LFH 60Pin Male SOLDER TYPE	2PCS
ITEM	PART NAME	DESCRIPTION	QY'T

△				QUALITY SYMBOLS
△				□: ☒:
△	2015/05/16	新版发行	Huaping Guan	CRITICAL MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C

Tolerance standard	
Length(cm)	Tolerance
1~50	±2
51~100	±5
101~500	±10
501~1500	±30

NAME:		LFH 60P MALE TO MALE CABLE (客户用图)			PART NO.	A05-06011XXX-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2015/05/16	Huaping	JackChen		A05-021
		东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770		