
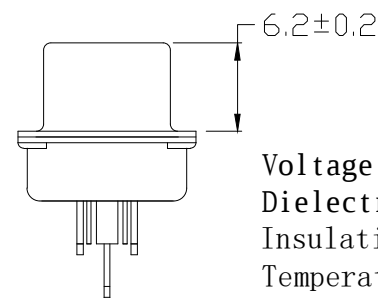
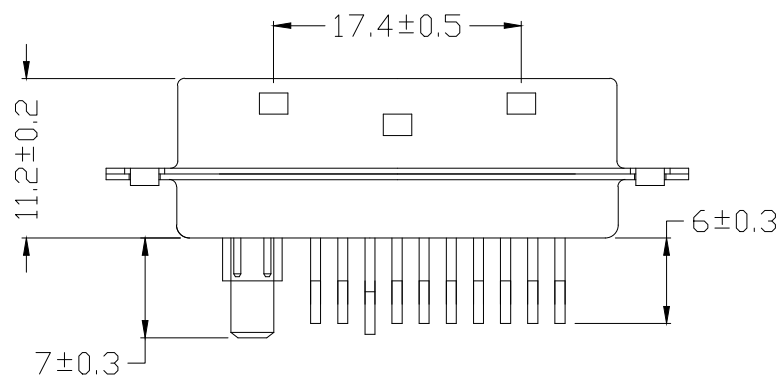
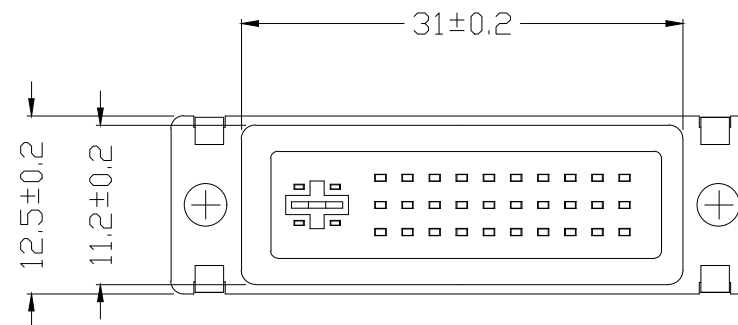


RoHS COMPLIANT

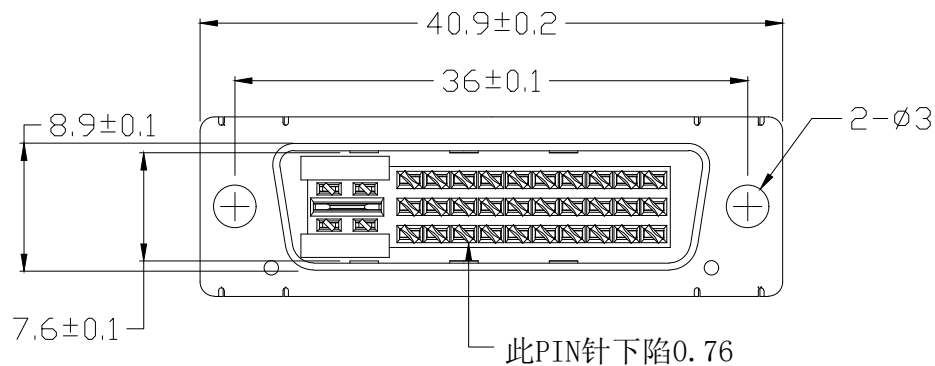

Voltage Current Rating:1.5 AMP.
Dielectric Withstanding Voltage:500V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:-25℃ to +85℃

4	REAR SHELL	SPCC	PALTING: Sn	
3	FRONT SHELL	SPCC	PALTING: Ni	
2	HOUSING	PBT+30%GF	COLOR: BLACK	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS


QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR

▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.50
.x ±0.30
.xx ±0.25



NAME:	EVC 30+5P MALE 焊线式 (客户用图)				PART NO.	B13-035311AN-01		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/05/19	JINGLI	KING ZHOU		B13-001	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770

△	2011/05/19	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER