

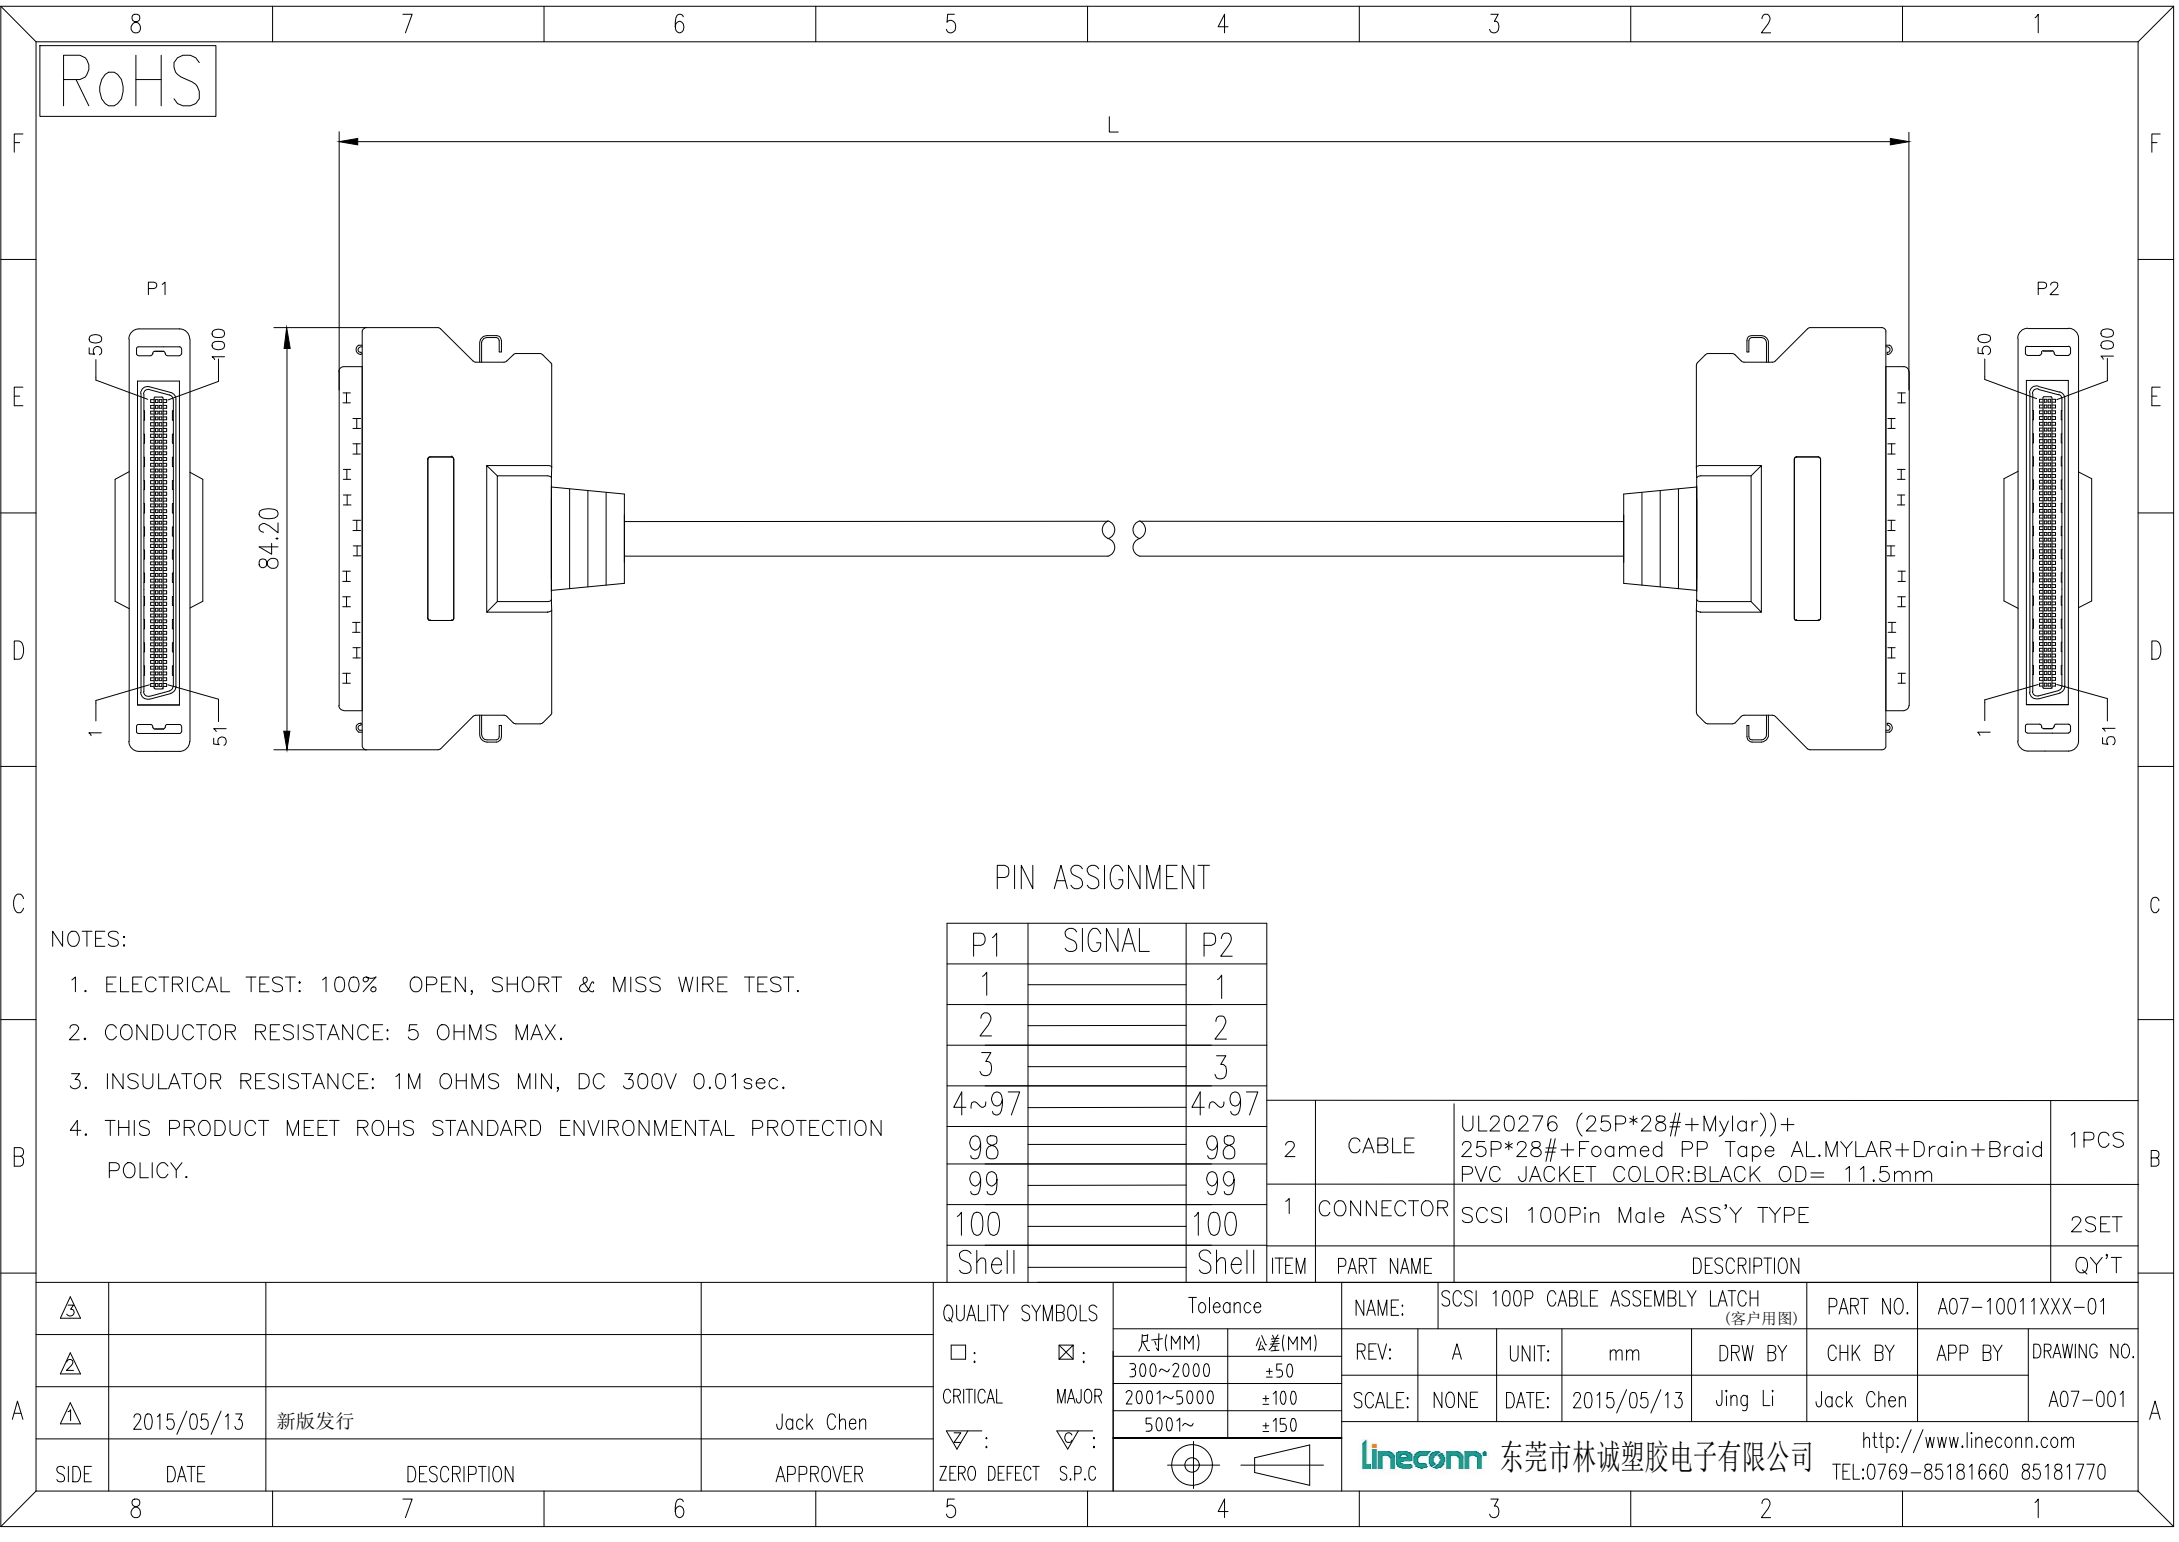


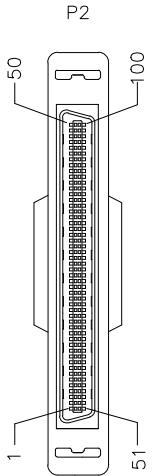

RoHS

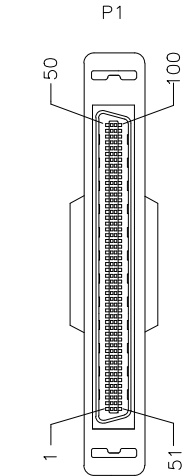

PIN ASSIGNMENT

- NOTES:
- 1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
 - 2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
 - 3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
 - 4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

P1	SIGNAL	P2				
1		1				
2		2				
3		3				
4~97		4~97				
98		98	2	CABLE	UL20276 (25P*28#+Mylar))+ 25P*28#+Foamed PP Tape AL.MYLAR+Drain+Braid PVC JACKET COLOR:BLACK OD= 11.5mm	1PCS
99		99	1	CONNECTOR	SCSI 100Pin Male ASS'Y TYPE	2SET
100		100				
Shell		Shell	ITEM	PART NAME	DESCRIPTION	QY'T

A					QUALITY SYMBOLS	Tolerance		NAME:	SCSI 100P CABLE ASSEMBLY LATCH (客户用图)			PART NO.	A07-10011XXX-01		
					□: □:	尺寸(MM)	公差(MM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
		2015/05/13	新版发行	Jack Chen	CRITICAL MAJOR	300~2000	±50	SCALE:	NONE	DATE:	2015/05/13	Jing Li	Jack Chen		A07-001
					▽: ▽:	2001~5000	±100	东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	5001~	±150								