
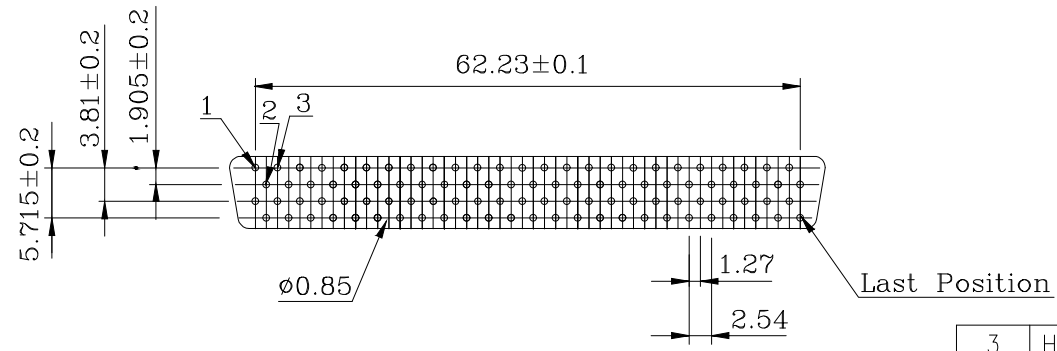

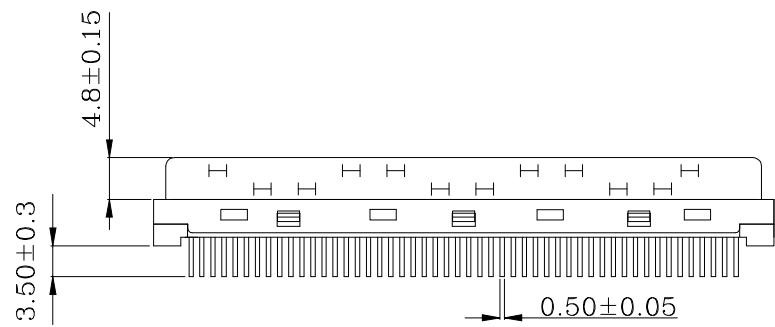


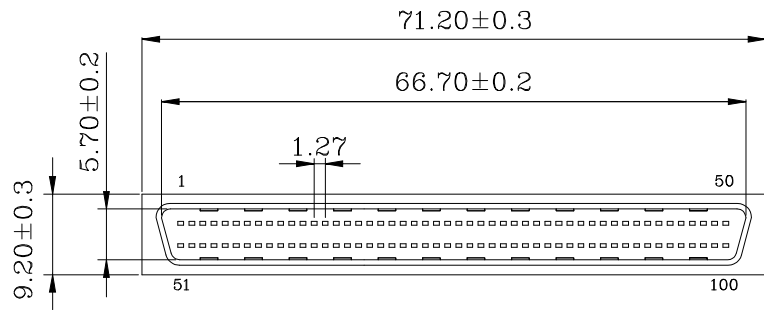

PCB Layout (B2)

• ELECTRICAL CHARACTERISTICS

- Contact Current Rating: 1 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: 500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operaion Temperature: -25°C ~ +85°C

3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA: Au 5u" SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

△			
△			
△	2016/07/19	新版发行	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
.x.	±0.80
.x	±0.50
.xx	±0.30

NAME:		SCSI PIN TYPE 100P MALE 180° DIP (客户用图)				PART NO.		B02-100711EN-10	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B02-058		
SCALE:	N:1	DATE:	2016/07/19	JACK CHEN	DEAN FAN				
		东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			