

F

E

D

C

B

A

F

E

D

C

B

A





No. of Contact	A	B	C	D
09	16.3	25.0	30.8	11.1
15	24.7	33.3	39.1	19.4
25	38.4	47.0	53.0	33.2
37	54.9	63.5	69.3	49.9

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:1000V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:-25℃ to +85℃

PART NO:
B05-0XX6X1AD-H4

NO.OF CONTACT:
09 = 9 pos
15 = 15 pos
25 = 25 pos
37 = 37 pos

HOUSING COLOR:
1 = BLACK
5 = WHITE
6 = BLUE

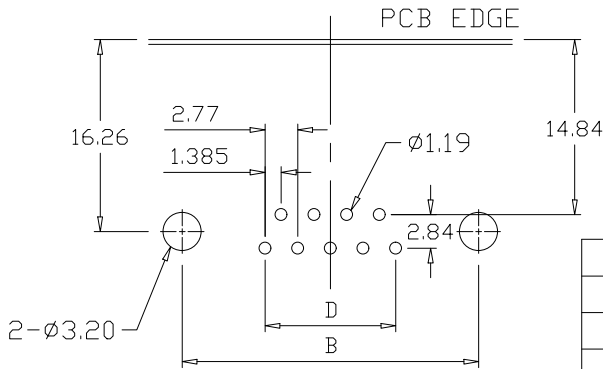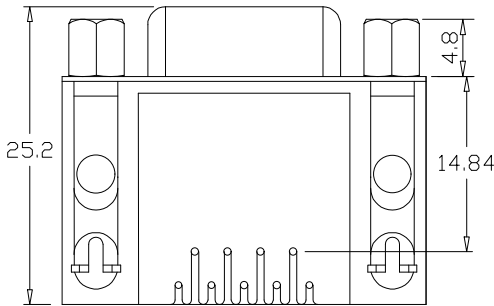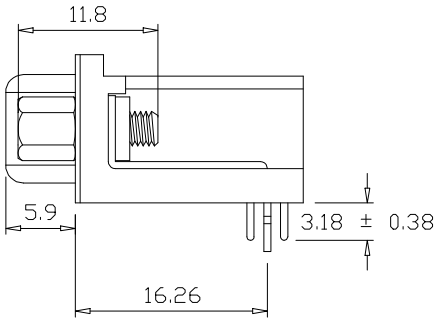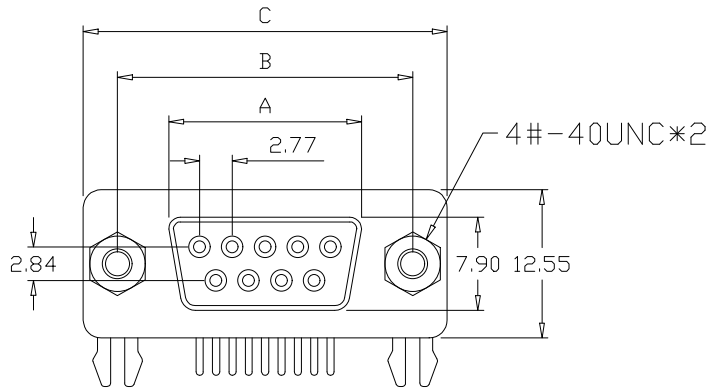

5	SCREW	COPPER ALLOY	PLATING: Ni	
4	BOARD LOCK	COPPER ALLOY	PLATING: Ni	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PLATING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: SEE NOTE SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

	2010/07/29新版发行	King Zhou	
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
		x.	±0.50
		.x	±0.30
		.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		D-SUB FEMALE 90度DIP 14.84mm前锁4.8mm螺母 (客户用图)				PART NO.		B05-0XX6X1AD-H4	
REV:	A	UNIT:	mm	DRW BY		CHK BY		APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2010/07/29	DAWN HU		KING ZHOU			B05-012
lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com									
TEL:0769-85181660 85181770									