

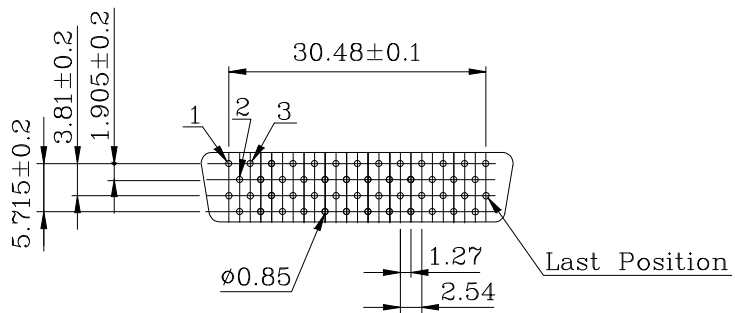
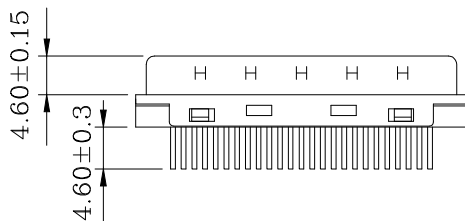


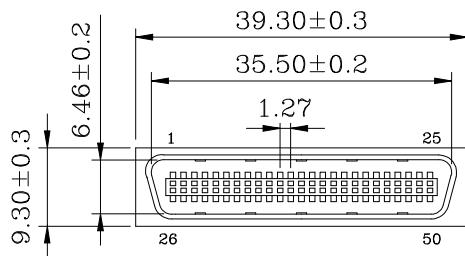

PCB Layout



• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operaion Temperature: -25°C ~ +85°C

3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

					QUALITY SYMBOLS	Tolance		NAME:		SCSI 50P MALE 180° DIP (客户用图)				PART NO.		B03-050711EN-01		
					: :	x.	±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
	2009/06/12	新版发行			King Zhou	CRITICAL	MAJOR	.x	±0.50	SCALE:	N:1	DATE:	2009/06/12	JACK CHEN	DEAN FAN	B03-065		
					: :			lineconn 东莞市林诚塑胶电子有限公司									http://www.lineconn.com	
SIDE	DATE	DESCRIPTION			APPROVER	ZERO DEFECT	S.P.C	TEL:0769-85181660 85181770										
8		7		6		5		4		3		2			1			