


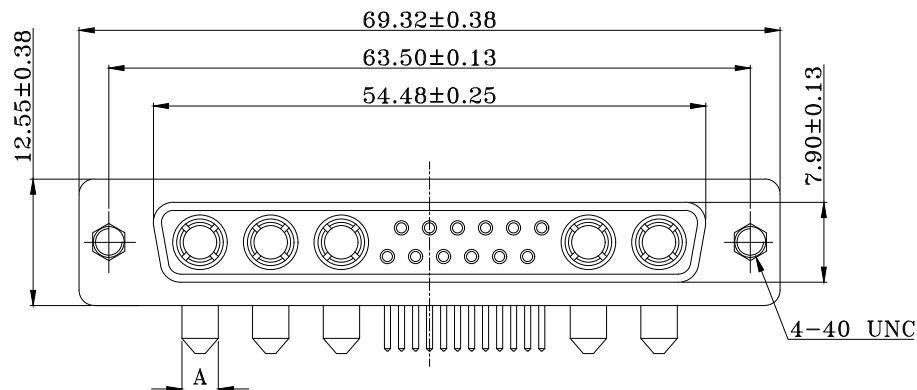

High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25℃ to +85℃



PART NO:
B08-AW56X14D-X1

HOUSING COLOR:

1:BLACK
3:GREEN
5:WHITE

CURRENT RATING:

A = 10 AMPS Dim.A ϕ 1.7 Dim.B ϕ 2.2
B = 20 AMPS Dim.A ϕ 2.8 Dim.B ϕ 3.3
C = 30 AMPS Dim.A ϕ 3.2 Dim.B ϕ 3.7
D = 40 AMPS Dim.A ϕ 3.7 Dim.B ϕ 4.2

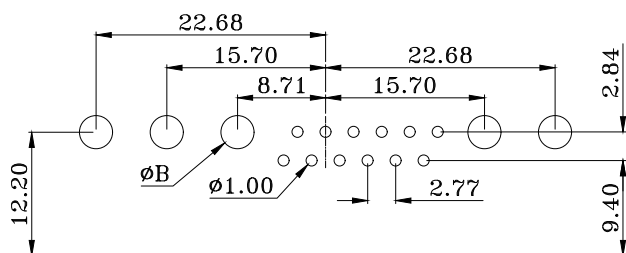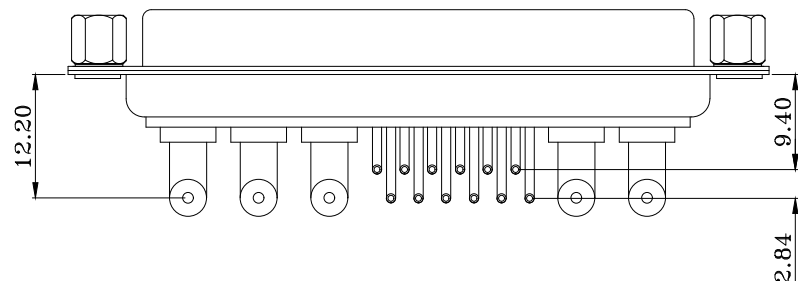

PCB LAYOUT

6	JACKSCREWS	BRASS	PLATING: Ni	
5	HOUSING	PBT+30%GF	COLOR: WHITE	
4	RIVETED INSERT	BRASS	PLATING: Ni	
3	REAR SHELL	SPCC	PLATING: Sn	
2	FRONT SHELL	SPCC	PLATING: Ni	
1	TERMINAL	BRASS	TERMINAL FINISH: FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

△	2018/09/22	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	Tolerance	NAME:	17W5 90度母头铆支架鱼叉锁螺丝 POWER D-SUB (客户用图)	PART NO.	B08-AW56114D-X1
□: ☒:	x. ±0.50	REV:	A	UNIT:	mm
CRITICAL MAJOR	.x ±0.30	SCALE:	N:1	DATE:	2018/09/22
▽: ◇:	.xx ±0.25			JINGLI	KING ZHOU
ZERO DEFECTS.P.C					

Lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770