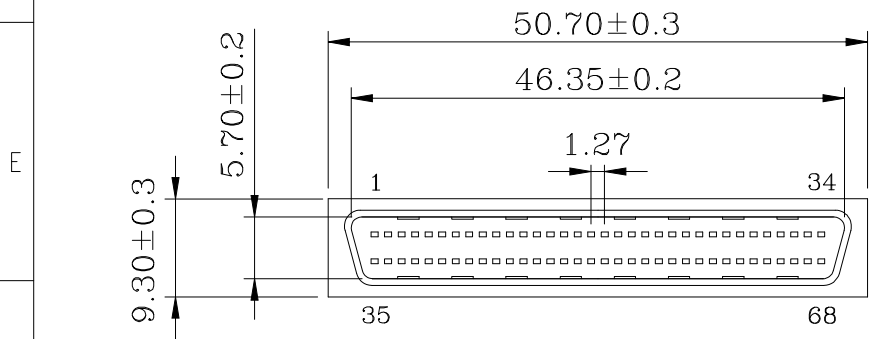


• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operaion Temperature: -25°C ~ +85°C

4	COVER	PBT+G.F.30% (UL 94V-0)	COLOR:BLACK	
3	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u” SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

	2011/03/09	新版发行	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolence		NAME:		SCSI PIN TYPE 68P MALE SOLDER ASSEMBLY CONN. (客户用图)		PART NO.		B02-068311E0-01	
	:		:	x.	±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY
CRITICAL	MAJOR	.x	±0.50	SCALE:	N:1	DATE:	2011/03/09	JACK CHEN	DEAN FAN	APP BY	DRAWING NO.
	:	.xx	±0.30								
ZERO DEFECT	S.P.C										