

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:500V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:-25℃ to +85℃

PART NO:

B17-0XX8X1AX-01

CONTACT NO.:

14: 14PIN

24: 24PIN

36: 36PIN

50: 50PIN

HOUSING COLOR:




1:BLACK

6:BLUE

OPTIONS:

D:A TYPE #4-40螺母

J:B TYPE铆三角片

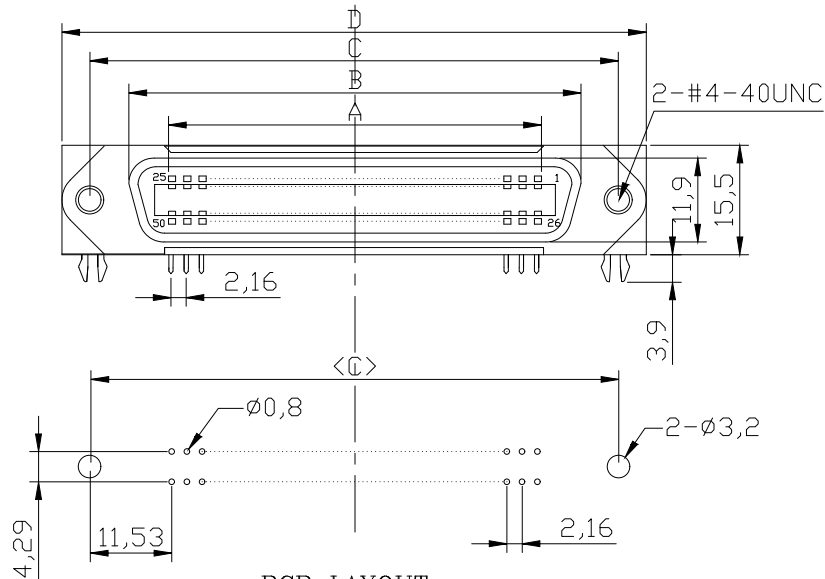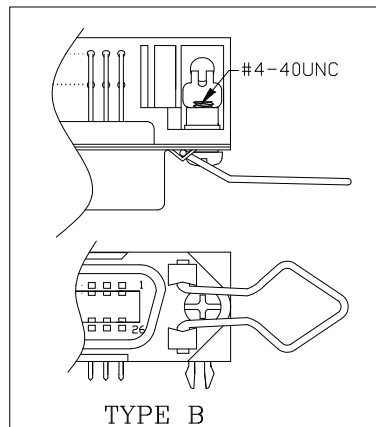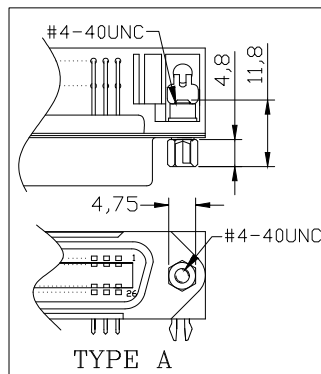

PCB LAYOUT

Positions	A	B	C	D
14	12.96	25.2	36.0	44.0
24	23.76	36.0	46.8	54.8
36	36.72	48.9	59.7	67.7
50	51.84	64.0	74.9	82.8

4	HOOK/NUT	STEEL	OVER-PLATING: Ni	
3	HOUSING	PBT+30%G.F.(UL 94V-0)	COLOR: SEE PART NO.	
2	SHELL	SPCC	OVER-PLATING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS

□: ☒:

CRITICAL MAJOR

▽: ▽:


ZERO DEFECT S.P.C

Tolerance

.x. ±0.50

.x ±0.30

.xx ±0.25



NAME: 57 母90度DIP铆合3.9Z字片

REV: A UNIT: mm DRW BY

SCALE: N:1 DATE: 2016/09/26 JINGLI

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

PART NO. B17-0XX8X1AX-01

CHK BY APP BY DRAWING NO.

KING ZHOU B17-003