

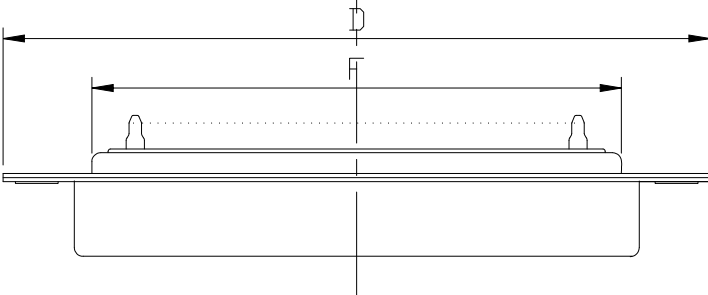


Positions	A	B	C	D	F	E	T
14	12.96	25.3	36.0	44.0	22.7	9.0	12.6
24	23.76	36.2	46.8	54.8	33.5	8.9	12.55
36	36.72	49.2	59.7	67.7	46.4	8.9	12.55
50	51.84	64.4	74.9	82.8	62.0	8.8	12.55

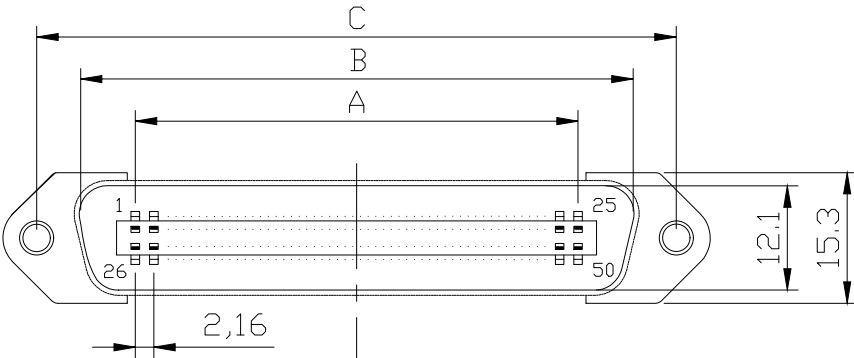

• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 1000MΩ/Min
Contact Resistance: 35mΩ/Max
Operaion Temperature: -25°C ~ +85°C

• PART NO: B17-0XX3X1A0-C2

CONTACT NO.: _____

14: 14PIN
24: 24PIN
36: 36PIN
50: 50PIN

HOUSING COLOR: _____

1:BLACK
6:BLUE

4	HOUSING	PBT+G.F.30% (UL 94V-0)	COLOR:SEE PART NO.	
3	REAR SHELL	SPCC	PLATING:Sn	
2	FRONT SHELL	SPCC	PLATING:Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA:G/F SOLDER AREA:Sn	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

△			
△			
△	2013/01/14	新版发行	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolence	
x.	±0.80
.x	±0.50
.xx	±0.30

NAME:		57-简易公头焊线式平孔型 (客户用图)			PART NO.		B17-0XX3X1A0-C2	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B17-009	
SCALE:	N:1	DATE:	2013/01/14	Huangmei	Jack Chen			
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			