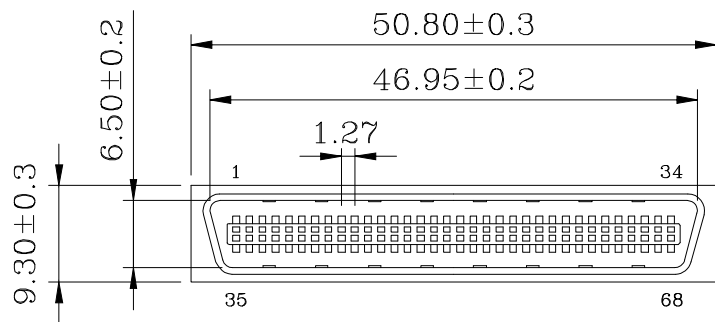


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C

4	COVER	PBT+30%GF	COLOR:BLACK	
3	HOUSING	PBT+30%GF	COLOR:BLACK	
2	SHELL	SPCC	PLATING:Ni	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 5u" SOLDER AREA:Sn UNDER-PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

				QUALITY SYMBOLS	Tolerance	NAME:	SCSI 68P MALE SOLDER ASSEMBLY CONN. (客户用图)				PART NO.	B03-068311EN-01		
△	2011/04/16	前排单排打点改为双排打点	JINGLI	□: ☒:	x. ±0.50	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-063	
△	2008/11/03	新版发行	FEI CHEN	CRITICAL MAJOR	.x ±0.30	SCALE:	N:1	DATE:	2008/11/03	FEI CHEN	KING ZHOU			
				▽: ▽:	.xx ±0.25									
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C						lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770				