




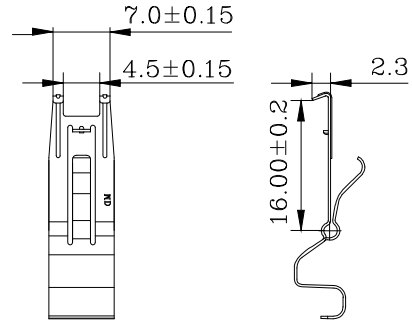

《 HPDB 》



《 HPCN 》

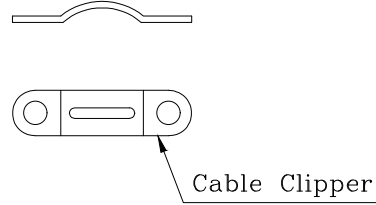

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -25°C ~ +85°C



PART NO:

BXX-036NN8N3-XX

SPECIFICATION:
02:HPDB
03:HPCN

ENTRY HOLE SIZES:

7A:ø7.5
90:ø9.0
1B:ø10.0

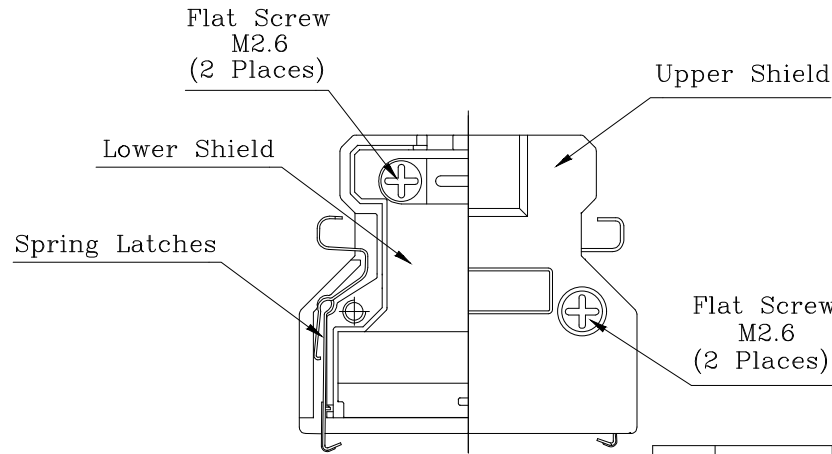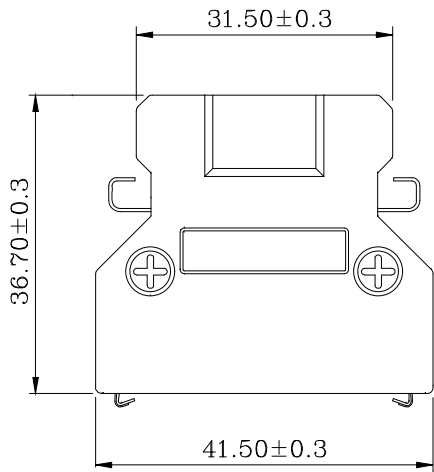


4	SPRING LATCH	STAINLESS STEEL		
3	CABLE CLIPPER	STEEL	PLATING:Ni	
2	FLAT SCREWS	STEEL	PLATING:Ni	
1	BACK SHELL	ZINC ALLOY	PLATING:Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.50
.x ±0.30
.xx ±0.25



NAME:

SCSI 36P MALE 锌合金组装外壳弹片式
(客户用图)

PART NO.

BXX-036NN8N3-XX

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2008/03/07

JINGLI

KING ZHOU

BXX-A07

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770



SIDE

DATE

DESCRIPTION

APPROVER

ZERO DEFECT

S.P.C



lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770