
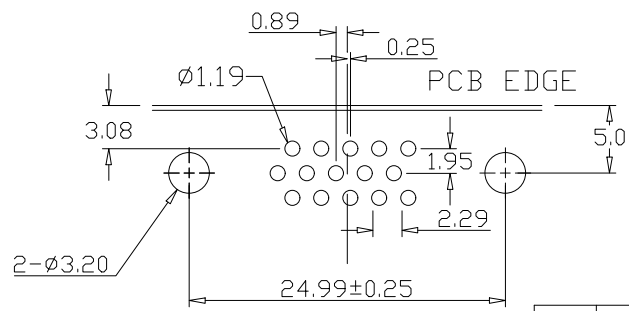
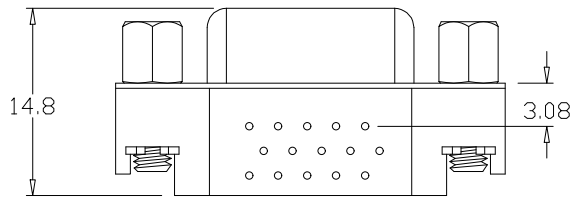



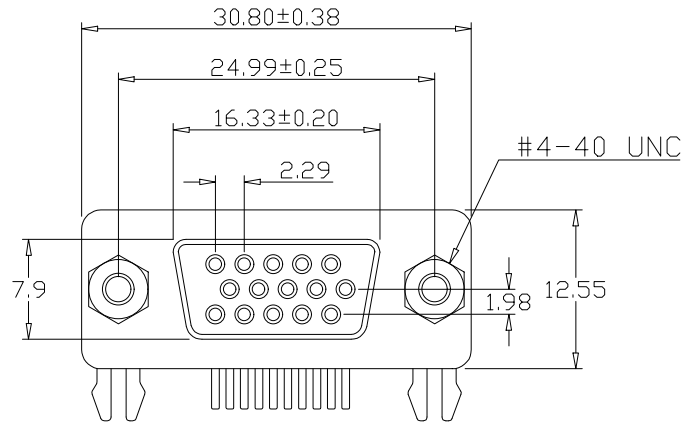

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:1000V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:-25℃ to +85℃

6	RIVET	COPPER ALLOY	PALTING: Ni	
5	SCREW	STEEL	PALTING: Ni	
4	BOARDLOCK	COPPER ALLOY	PALTING: Ni	
3	HOUSING	PBT+30%GF	COLOR: BLACK	
2	SHELL	SPCC	PALTING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER-PLATING: Ni	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

				QUALITY SYMBOLS	Tolerance	NAME:	HD, D-SUB 15P FEMALE 90度DIP 3.08mm 前锁4.8mm螺母 (客户用图)	PART NO.	B04-015611AD-G4
				□: ☒:	x. ±0.50	REV:	A UNIT: mm DRW BY	CHK BY	APP BY DRAWING NO.
				CRITICAL MAJOR	.x ±0.30	SCALE:	N:1 DATE: 2011/03/07 JINGLI	KING ZHOU	B04-025
				▽: ▽:	.xx ±0.25				
A	△	2011/03/07	NEW ISSUE	JINGLI					
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECTS.P.C		Lineconn 东莞市林诚塑胶电子有限公司		
							http://www.lineconn.com		
							TEL: 0769-85181660 85181770		