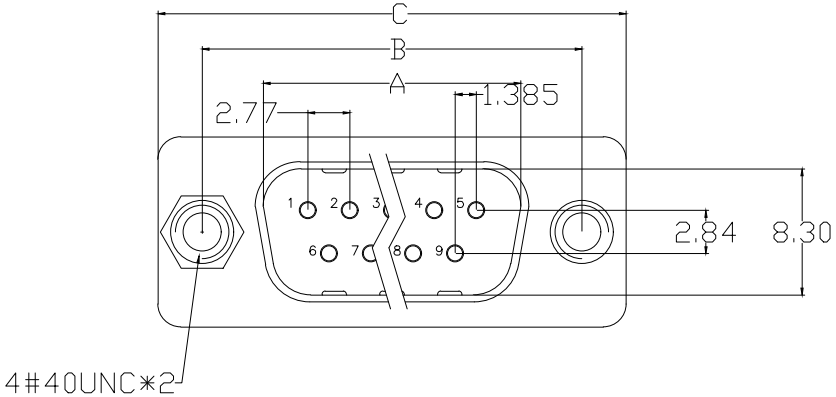

No.of Contact	A	B	C	D
09	16.9	25.0	30.8	19.0
15	25.3	33.3	39.2	27.7
25	39.0	47.0	53.0	41.0
37	55.4	63.5	69.4	57.3

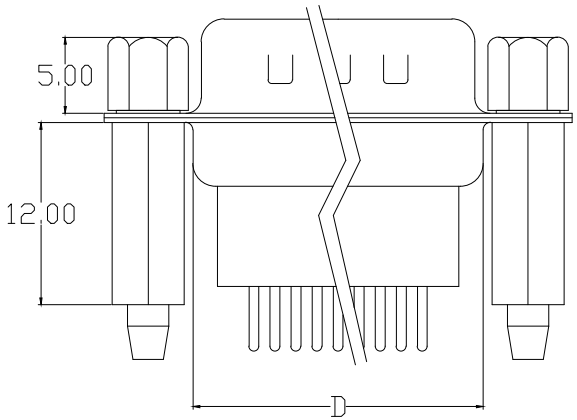

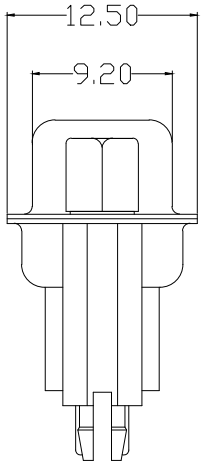

Voltage Current Rating:5 AMP.
Dielectric Withstanding Voltage:1000V AC
Insulation Resistance:1000MΩ Min.
Temperature Range:-25℃ to +85℃

PART NO:

B05-0XX7X1AD-H5

NO.OF CONTACT:
09 = 9 pos
15 = 15 pos
25 = 25 pos
37 = 37 pos

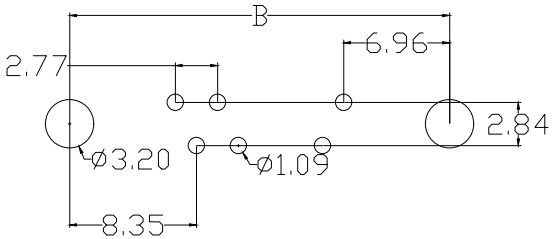

P.C.B LAYOUT

ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS
6	SCREW	STEEL	PALTING: Ni	
5	BOARDLOCK	COPPER ALLOY	PALTING: Ni	
4	HOUSING	PBT+30%GF	COLOR: BLACK	
3	REAR SHELL	SPCC	PALTING: Sn	
2	FRONT SHELL	SPCC	PALTING: Ni	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: G/F SOLDER AREA: Sn UNDER-PLATING: Ni	

SIDE	DATE	DESCRIPTION	APPROVER
A	2018/05/30	NEW ISSUE	JINGLI

QUALITY SYMBOLS
□: CRITICAL ⊠: MAJOR
▽: ZERO DEFECT ▽: S.P.C

Toleance	
x.	±0.50
.x	±0.30
.xx	±0.25

NAME:	D-SUB MALE 180度后铆12.0鱼叉前锁5.0mm螺母 (客户用图)				PART NO.	B05-0XX7X1AD-H5	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/05/30	JINGLI	KING ZHOU		B05-094

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770