




120	74.93	80.74	84.90	87.55	59
100	62.23	68.04	72.20	74.85	49
80	49.53	55.54	59.50	62.13	39
68	41.91	47.72	51.88	54.53	33
60	36.83	42.64	46.80	49.45	29
50	30.48	36.29	40.45	43.10	24
40	24.13	29.94	34.10	36.70	19
30	17.78	23.59	27.75	30.35	14
20	11.43	17.24	21.40	24.00	9
POS	A	B	C	D	n

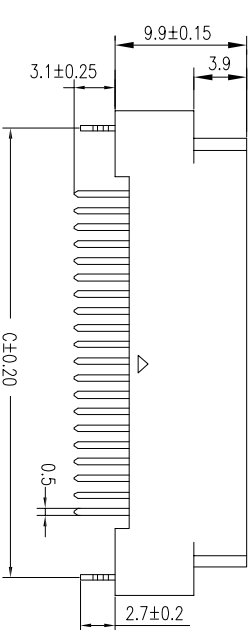

Voltage Current Rating:1 AMP.30V AC
Dielectric Withstanding Voltage:500V AC
Contact Resistance:35 mΩ Max.
Insulation Resistance:500MΩ Min.
Temperature Range:-20℃ to +85℃

PART NO.: B03-XXX71NCN-A2
NO.OF PIN: _____
20: 20P
120: 120P



ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS
3	BOARDLOCKS	COPPER ALLOY	PLATING: TIn	
2	HOUSING	PBT+30%GF	COLOR: BLACK	
1	TERMINAL	COPPER ALLOY	CONTACT AREA: Au 3u" SOLDER AREA: Sn UNDER-PLATING: Ni	

A			QUALITY SYMBOLS	Tolerance	NAME:		SCSI MALE 全塑180度DIP		PART NO.	B03-XXX71NCN-A
						(客户用图)				
		☐ : CRITICAL			☒ : MAJOR	REV: A	UNIT: mm	DRW BY		
A	2018/11/22新版发行	King Zhou		X. X .xx	±0.80 ±0.50 ±0.25	SCALE: N:1	DATE: 2018/11/22	DAWN HU	KING ZHOU	B03-089
SIDE	DATE	DESCRIPTION	APPROVER	☒ : ZERO DEFECT	☒ : S.P.C	 东莞市林诚塑胶电子有限公司 http://www.linecom.com TEL:0769-85181660 85181770				