



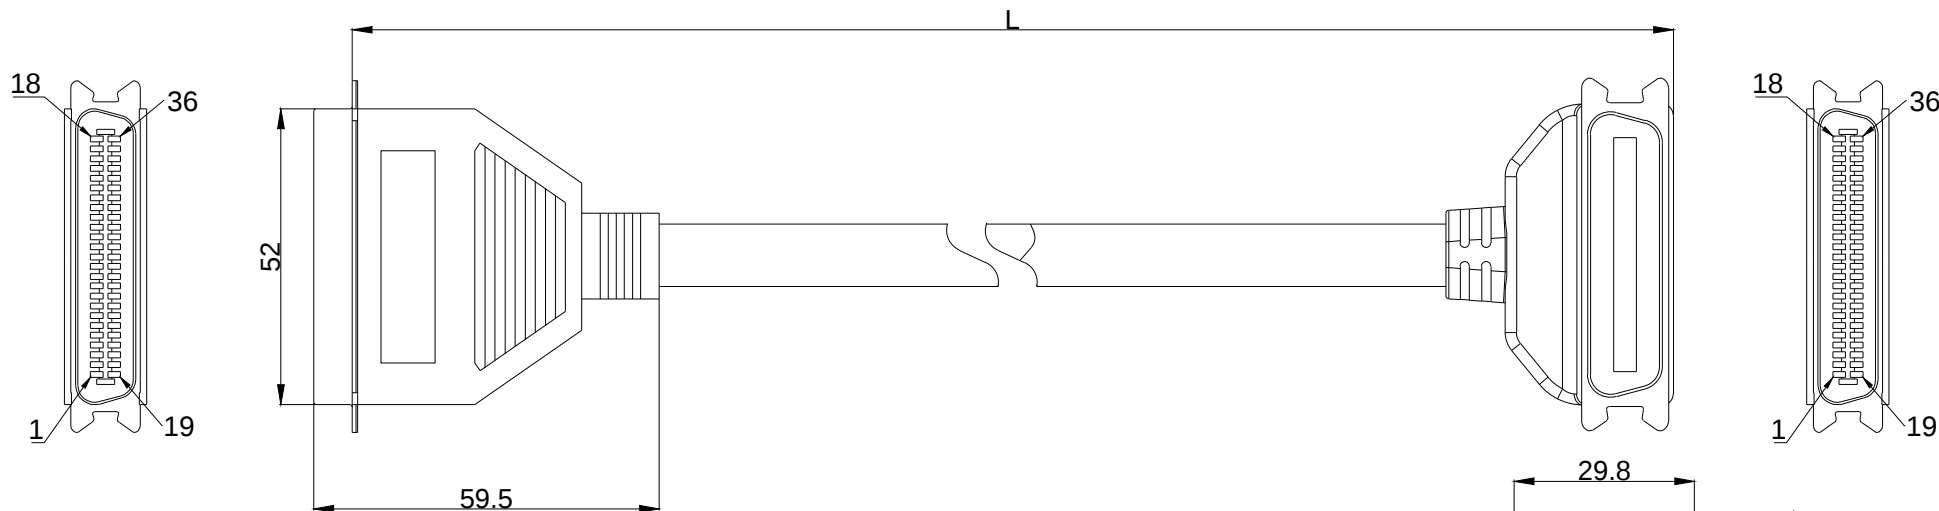

PIN ASSIGNMENT

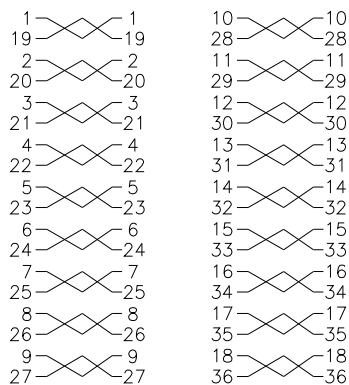

SHELL_____SHELL

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

料号	连接器规格	线材颜色	长度 (cm)
A21-03611XXX-02	简易型	黑色	XXX:001=10cm XXX:010=100cm
A21-03612XXX-02	简易型	灰色	
A21-03611XXX-A2	传统型	黑色	
A21-03612XXX-A2	传统型	灰色	

6	CABLE	UL20276 18.5P*28AWG+Foamed PP Tape+ABD PVC JACKET COLOR:SEE NOTES 2, OD=8.0mm	1PCS
5	COPPER FOIL	COPPER FOIL W=25MM	NA
4	OVERMOLD	45P PVC COLOR: BLACK	NA
3	MOLD	PE	NA
2	CONNECTOR	CN (57) 36Pin MALE SOLDER,HOUSING COLOR:BLUE	1PCS
1	CONNECTOR	CN (57) 36Pin MALE SOLDER,HOUSING COLOR:BLUE	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

				QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▼: ZERO DEFECT S.P.C	Tolerance		NAME: CN(57) 36P MALE-MALE CABLE直头-弯头				PART NO.	A21-0361X XXX-X2				
					尺寸(CM)	公差(CM)	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
					30~200	±10										
	2021/12/14	新版发行	JACK CHEN		201~500	±20	SCALE:	NONE	DATE:	2021/12/14	Huangmei	Jack Chen			A21-002	
					501~	±30	东莞市林诚塑胶电子有限公司								http://www.lineconn.com	
SIDE	DATE	DESCRIPTION	APPROVER				东莞市林诚塑胶电子有限公司								TEL:0769-85181660 85181770	