



RoHS

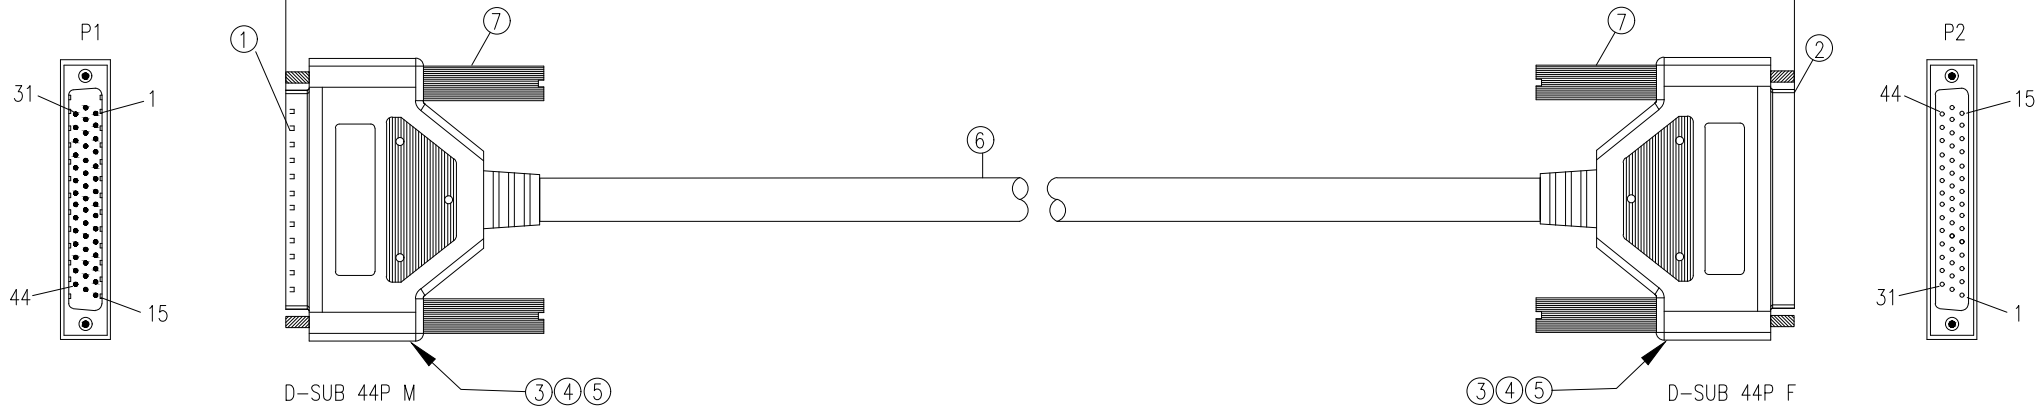

PIN ASSIGNMENT

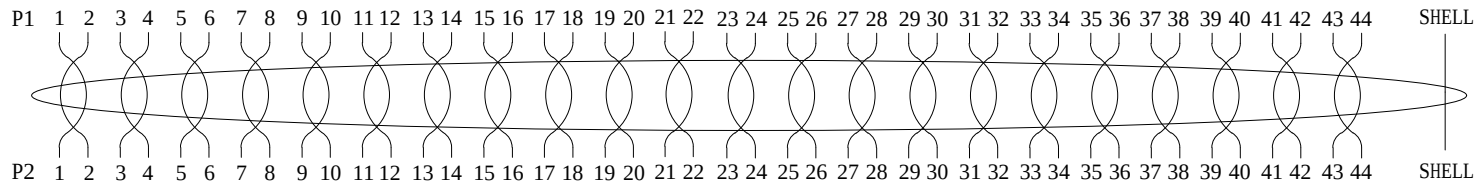

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

|      |             |                                                          |      |
|------|-------------|----------------------------------------------------------|------|
| 7    | SCREW       | SCREW 4-40# NIK(大 E33 BLACK)                             | 4PCS |
| 6    | CABLE       | UL20276 28AWG*25P+AEB<br>PVC JACKET COLOR:BLACK OD=8.5mm | 1PCS |
| 5    | COPPER FOIL | COPPER FOIL W=25MM                                       | NA   |
| 4    | OVERMOLD    | 45P PVC COLOR: BLACK                                     | NA   |
| 3    | MOLD        | PE                                                       | NA   |
| 2    | CONNECTOR   | HD-SUB 44Pin Female Solder BLACK TYPE                    | 1PCS |
| 1    | CONNECTOR   | HD-SUB 44Pin Male Solder BLACK TYPE                      | 1PCS |
| ITEM | PART NAME   | DESCRIPTION                                              | QY'T |

|                            |            |             |          |                                                                  |               |                                                                             |                                           |       |            |           |          |                 |             |
|----------------------------|------------|-------------|----------|------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------|-------------------------------------------|-------|------------|-----------|----------|-----------------|-------------|
|                            |            |             |          | QUALITY SYMBOLS                                                  | Tolerance     | NAME:                                                                       | HD.D-SUB 44P Male To 44P Female<br>(客户用图) |       |            |           | PART NO. | A04-04431XXX-01 |             |
|                            |            |             |          | <input type="checkbox"/> : <input checked="" type="checkbox"/> : | 尺寸(CM) 公差(CM) | REV:                                                                        | A                                         | UNIT: | mm         | DRW BY    | CHK BY   | APP BY          | DRAWING NO. |
|                            | 2017/05/04 | 新版发行        |          | CRITICAL MAJOR                                                   | 30~200 ±10    | SCALE:                                                                      | NONE                                      | DATE: | 2017/05/04 | Jack Chen | HP Guan  |                 | A04-009     |
|                            |            |             |          | 201~500 ±20                                                      |               |                                                                             |                                           |       |            |           |          |                 |             |
|                            |            |             |          | 501~ ±30                                                         |               |                                                                             |                                           |       |            |           |          |                 |             |
| SIDE                       | DATE       | DESCRIPTION | APPROVER | ZERO DEFECT S.P.C                                                |               | 东莞市林诚塑胶电子有限公司 <a href="http://www.lineconn.com">http://www.lineconn.com</a> |                                           |       |            |           |          |                 |             |
| TEL:0769-85181660 85181770 |            |             |          |                                                                  |               |                                                                             |                                           |       |            |           |          |                 |             |