
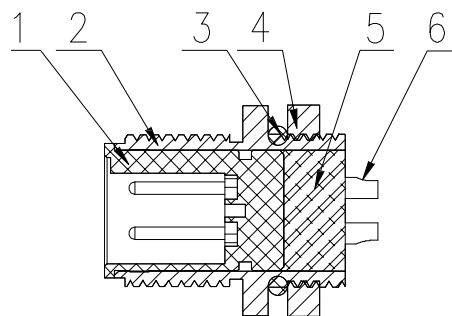
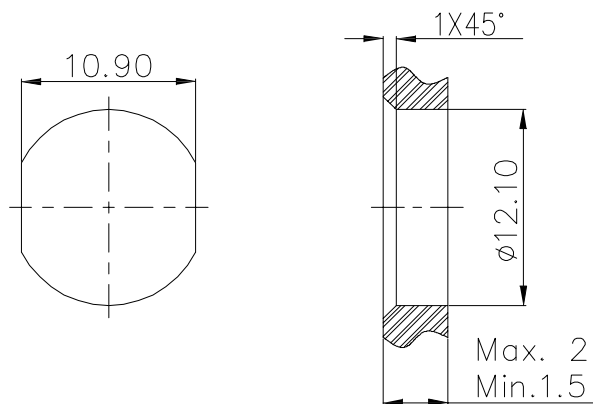


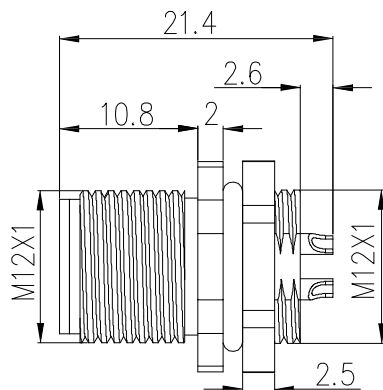


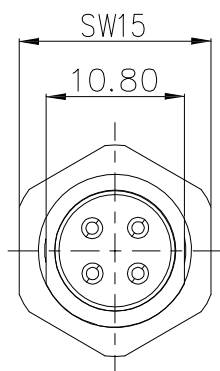

Section A-A

Current rating: 4A
Rated voltage: 250V
Contact resistance: 3mΩ Max.
Durability: 500 cycles
Temperature range: -45℃ to +105℃
Waterproof rating: IP67
ROHS compliant

6	Contact	Copper alloy
5	Housing	EP
4	Nut	Copper alloy
3	Seals	NBR
2	Hood	Copper alloy
1	Electrical insulation	PA
Item	Desc.	Material

Panel cutout size


△	2021/11/04	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:

M12 A coded 4Pin male solder rear lock panel

REV:

A

SCALE:

N:1

UNIT:

mm

DATE:

2021/11/04

DRW BY: Huangmei

CHK BY: Jack Chen

APP BY:

DRAWING NO. B10-111

PART NO. B10-M12Z04A0-4B

TEL:0769-85181660 85181770

http://www.lineconn.com

东莞市林诚塑胶电子有限公司

Lineconn