


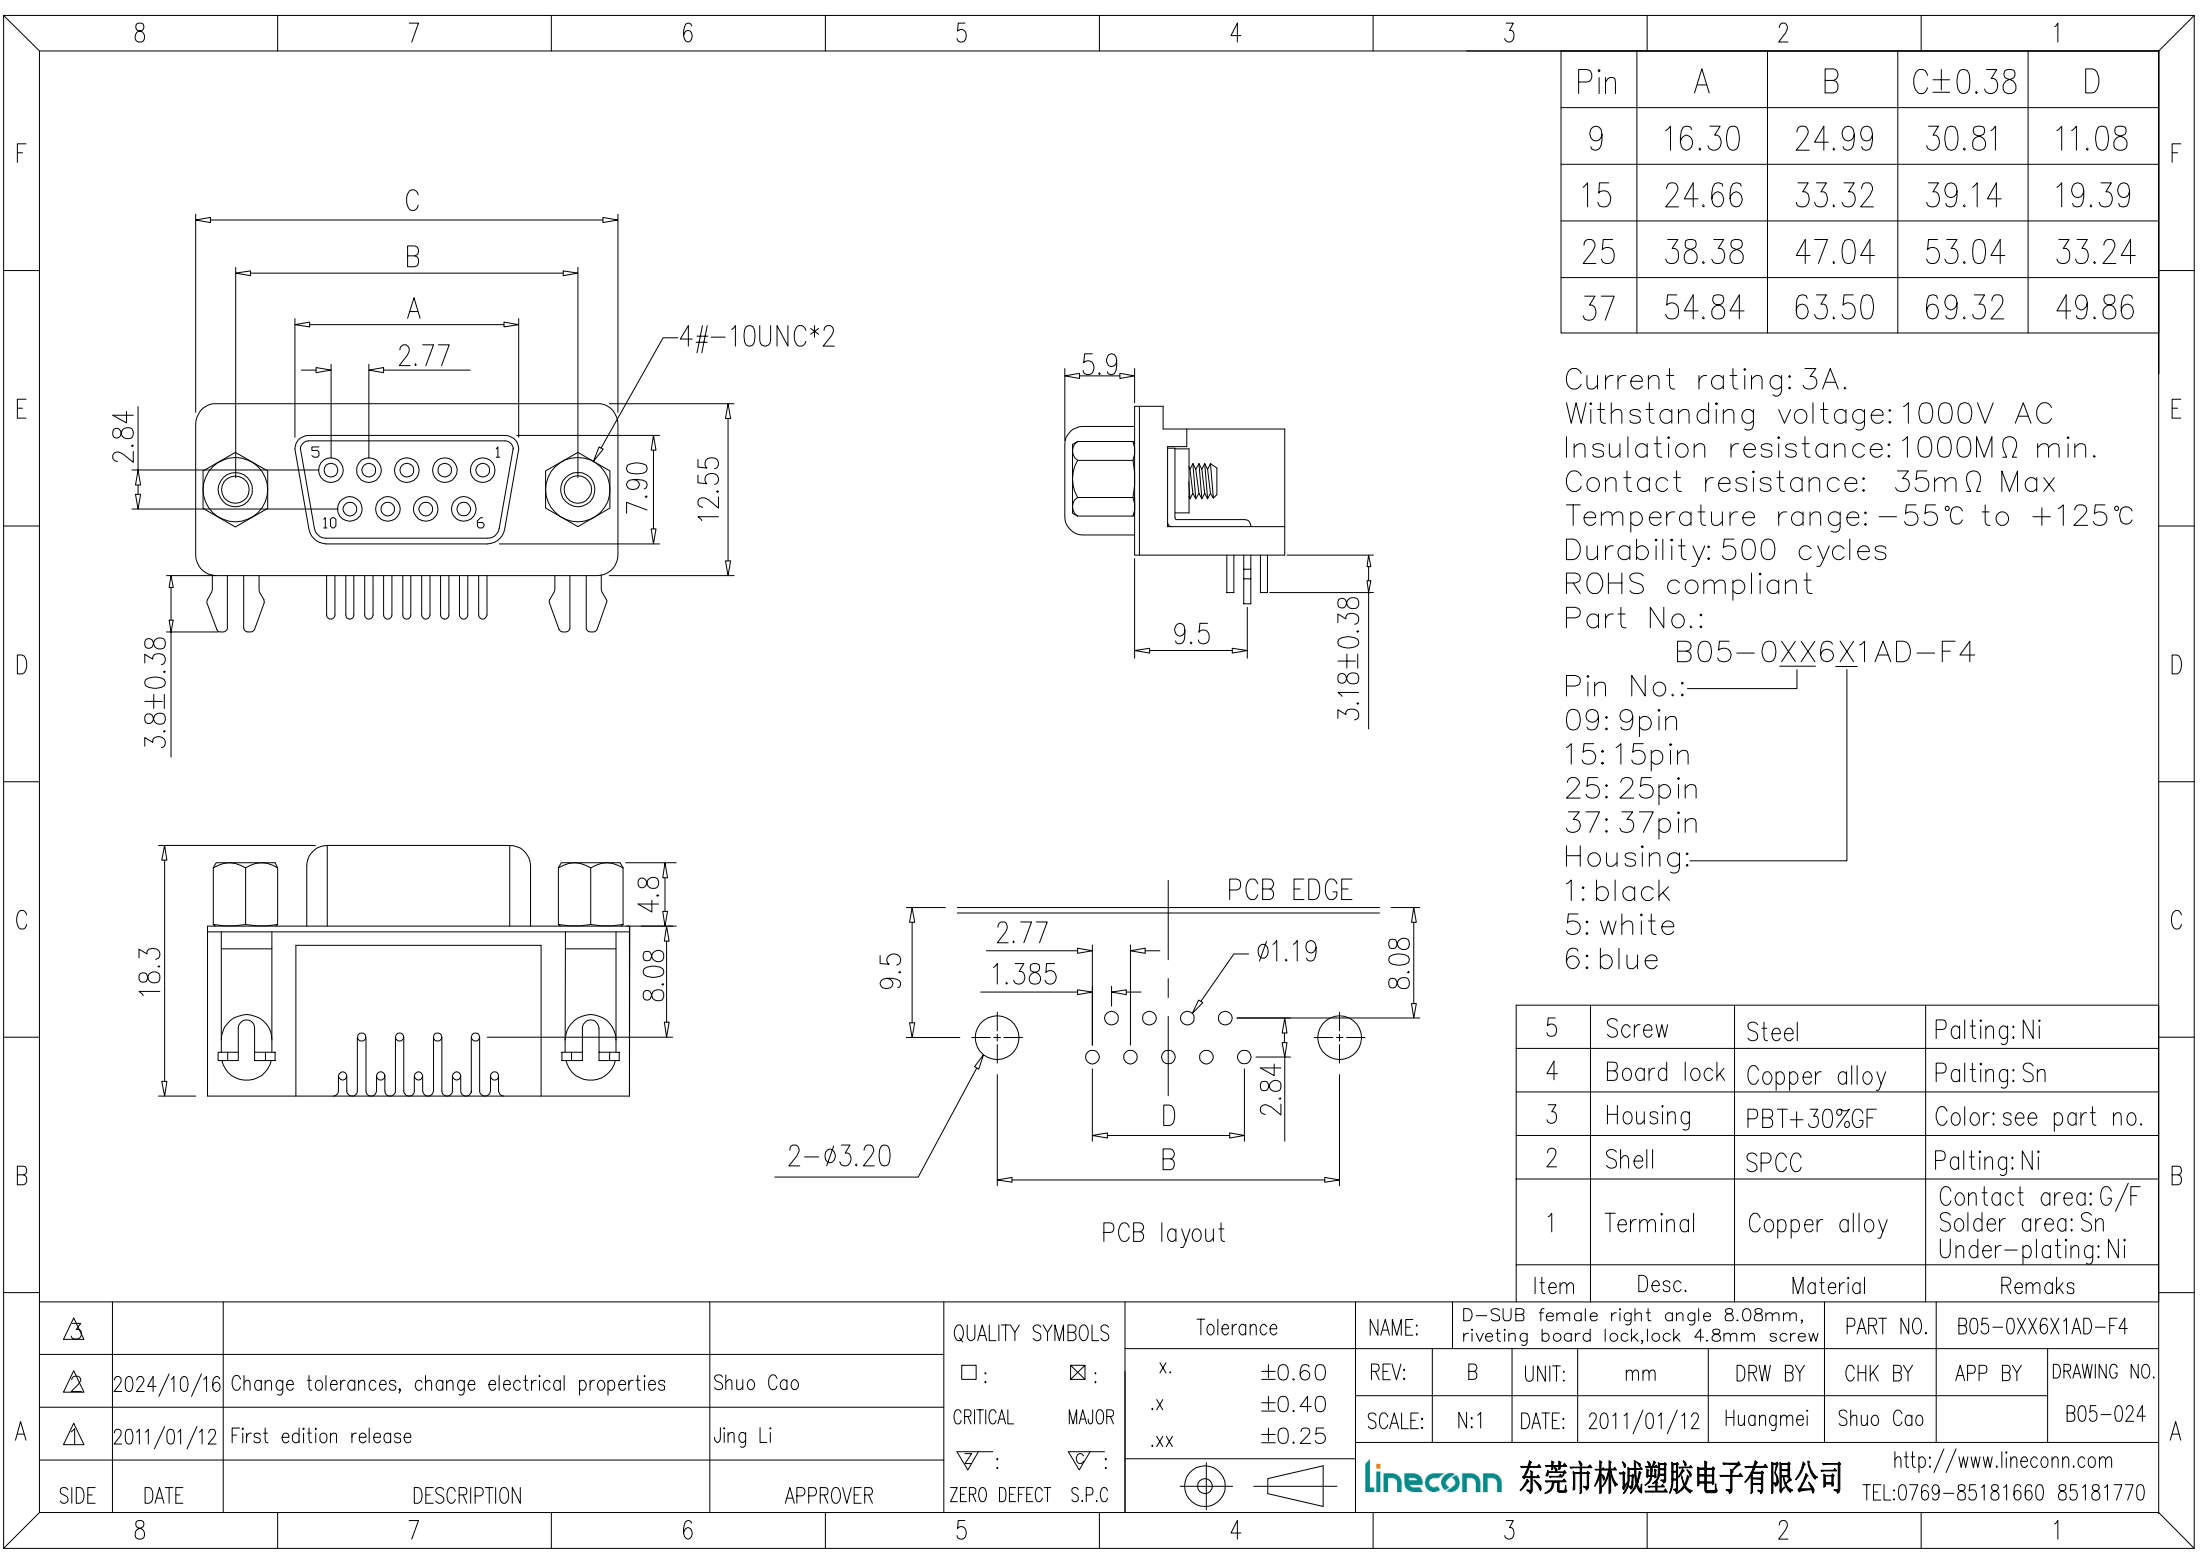

Pin	A	B	C±0.38	D
9	16.30	24.99	30.81	11.08
15	24.66	33.32	39.14	19.39
25	38.38	47.04	53.04	33.24
37	54.84	63.50	69.32	49.86

Current rating: 3A.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ min.
Contact resistance: 35mΩ Max
Temperature range: -55℃ to +125℃
Durability: 500 cycles
ROHS compliant
Part No.:
B05-0XX6X1AD-F4

Pin No.:
09: 9pin
15: 15pin
25: 25pin
37: 37pin
Housing:
1: black
5: white
6: blue

5	Screw	Steel	Palting: Ni
4	Board lock	Copper alloy	Palting: Sn
3	Housing	PBT+30%GF	Color: see part no.
2	Shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

A					QUALITY SYMBOLS	Tolerance		NAME:		D-SUB female right angle 8.08mm, riveting board lock,lock 4.8mm screw				PART NO.	B05-0XX6X1AD-F4		A
		2024/10/16	Change tolerances, change electrical properties	Shuo Cao	: :	x.	±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
		2011/01/12	First edition release	Jing Li	CRITICAL MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2011/01/12	Huangmei	Shuo Cao		B05-024		
					: :	.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
	SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT S.P.C											
8		7		6		5		4		3		2		1			