
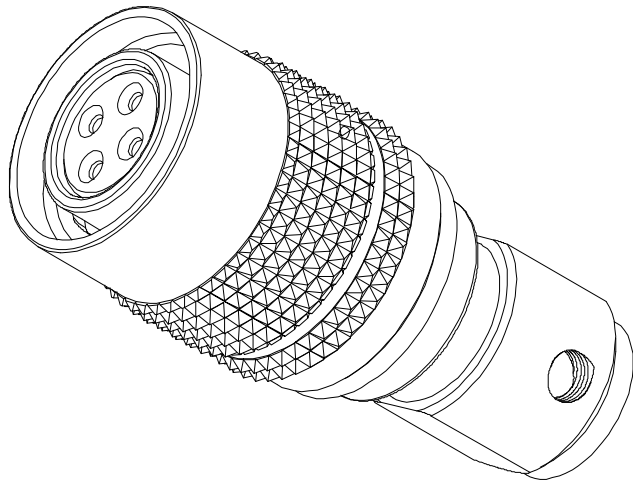
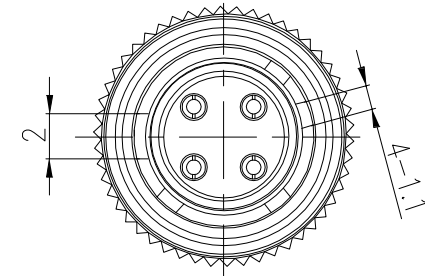
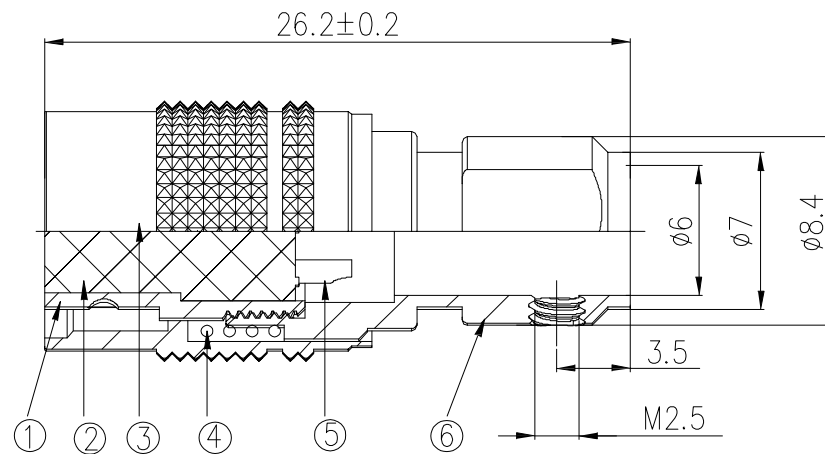




Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -25℃ to +85℃
ROHS compliant
Waterproof rating: IP67

6	Cable gland	Copper	Plating: Ni
5	Contact	Copper	Plating: Au
4	sprung	Steel	
3	Shell	Copper alloy	Plating: Ni
2	Housing	PPS	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

A	2022/11/23	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	HR10A-7P-4S 4pin female solder assembly			PART NO.	B10-01PT04SH-KFD		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2022/11/23	Huangmei	Jack Chen		B10-128
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			