



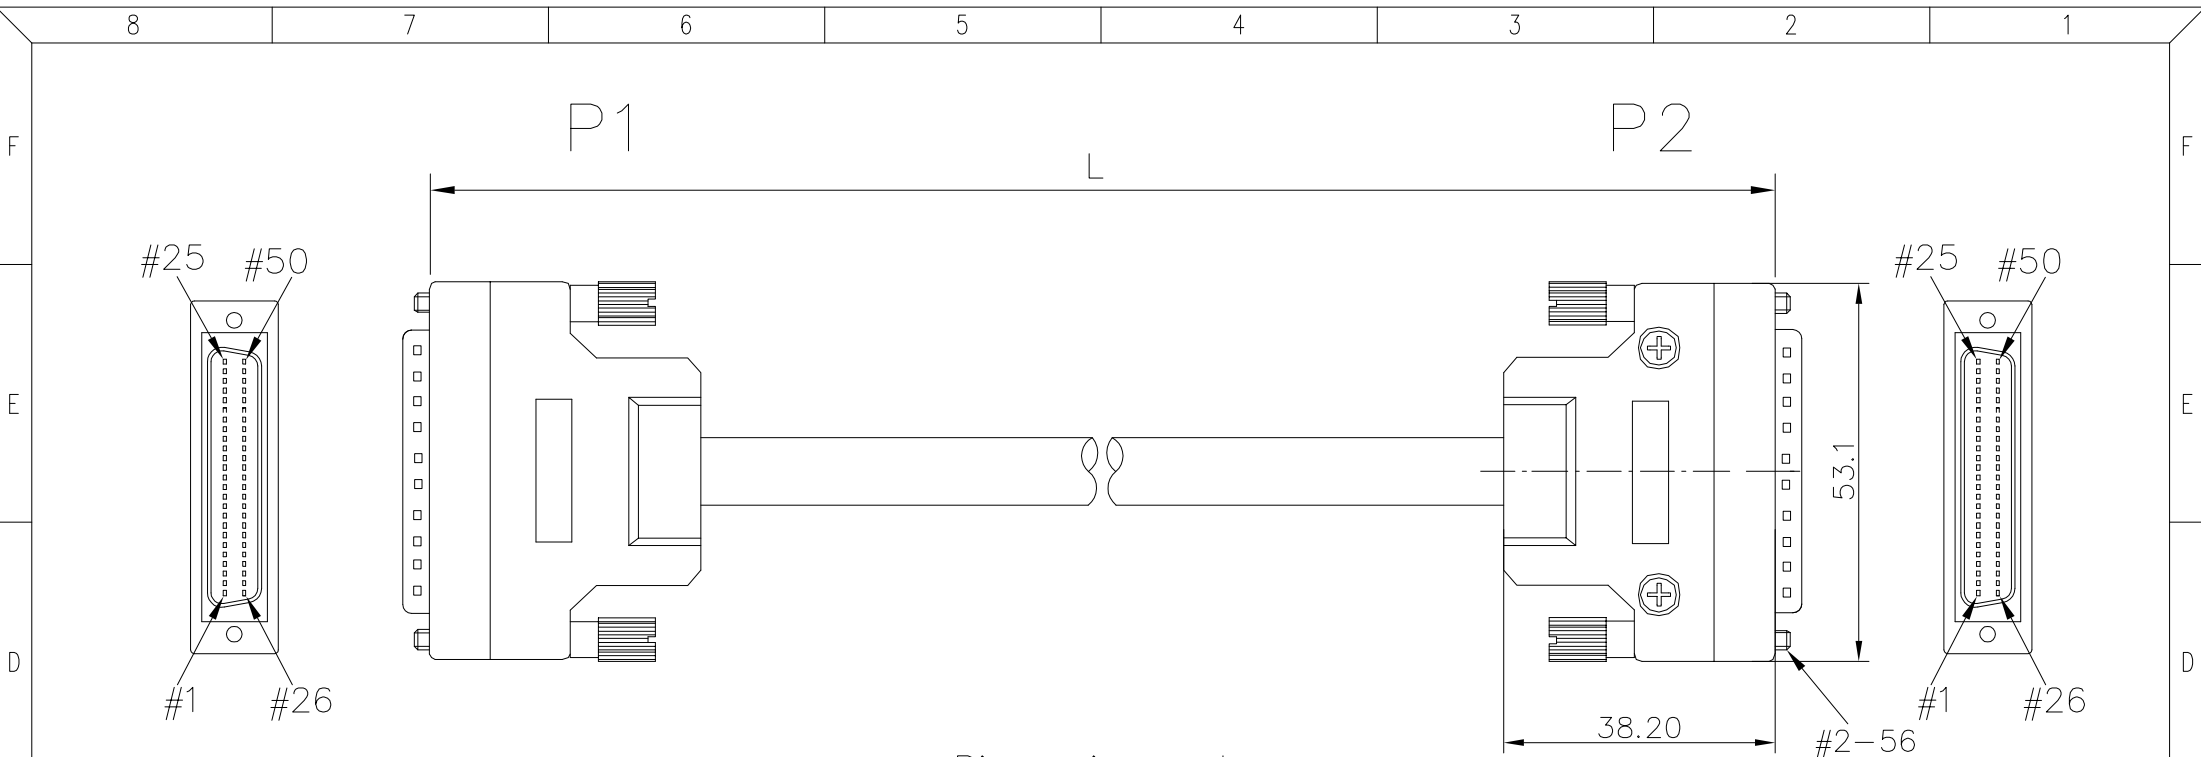

Pin assignment

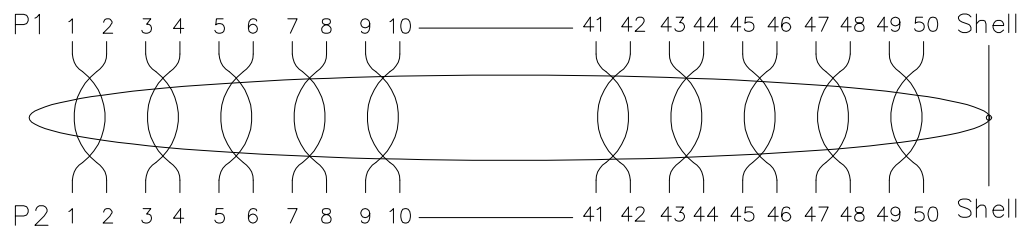

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part no. description: A09-05011XXX-C2,
XXX: 001=length: 10cm

2	Cable	UL20276 25P*28awg+ABD PVC jacket,color:black, OD 8.5mm	1pcs
1	Connector	HPDB 50pin male IDC type,zinc alloy hood with screw	2set
Item	Part name	Description	QY'T

A	△	2021/10/09	Change connector type	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance Length(mm) Tolerance(mm) 300~2000 ±50 2001~5000 ±100 5001~ ±150	NAME: HPDB 50pin male-male cable, IDC connector, zinc alloy hood with screw				PART NO.	A09-05011XXX-C2		
	△	2020/05/22	Change part number	Jack Chen			REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	△	2015/05/13	First edition release	Jack Chen			SCALE:	NONE	DATE:	2015/05/13	Jing Li	Jack Chen		A09-008
	SIDE	DATE	DESCRIPTION	APPROVER			Lineconn 东莞市林诚塑胶电子有限公司							
	8	7	6	5			http://www.lineconn.com TEL:0769-85181660 85181770							
		8	7	6	5	4	3	2	1					