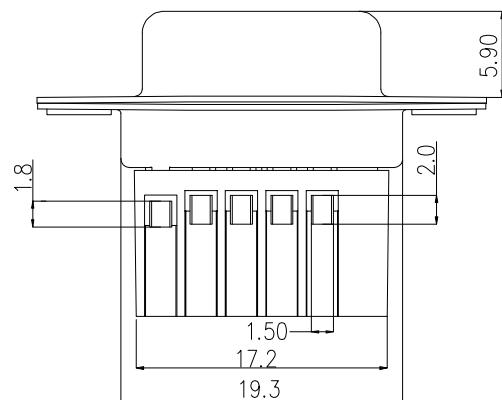
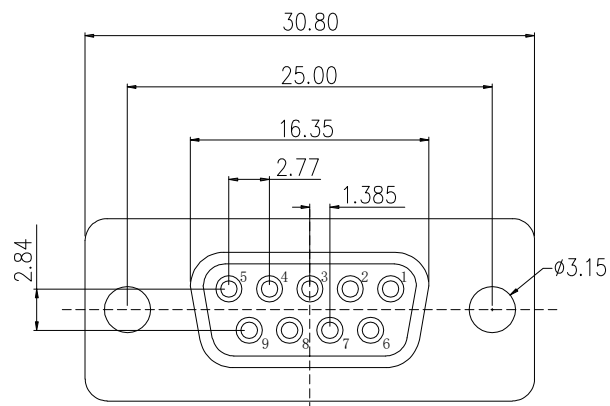


Voltage current rating: 3A
 Rating voltage: 250V AC
 Withstanding voltage: 1000V AC
 Insulation resistance: 1000M Ω Min.
 Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
 ROHS compliant


6	Screw	Steel	Plating: Zn
5	Copper shell	Copper alloy	Plating: Ni
4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT UL94V-0	Color: white
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
 ▼: ▼: ZERO DEFECT S.P.C

Tolerance

x. ± 0.60
 .x ± 0.40
 .xx ± 0.25



NAME: D-SUB 9pin female solderless,lock screw PART NO. B05-009251A0-N1



REV: A UNIT: mm DRW BY CHK BY APP BY DRAWING NO.

SCALE: N:1 DATE: 2021/12/07 Qiang Liao Shuo Cao B05-250

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL:0769-85181660 85181770

2021/12/07 First edition release Shuo Cao

SIDE DATE DESCRIPTION APPROVER

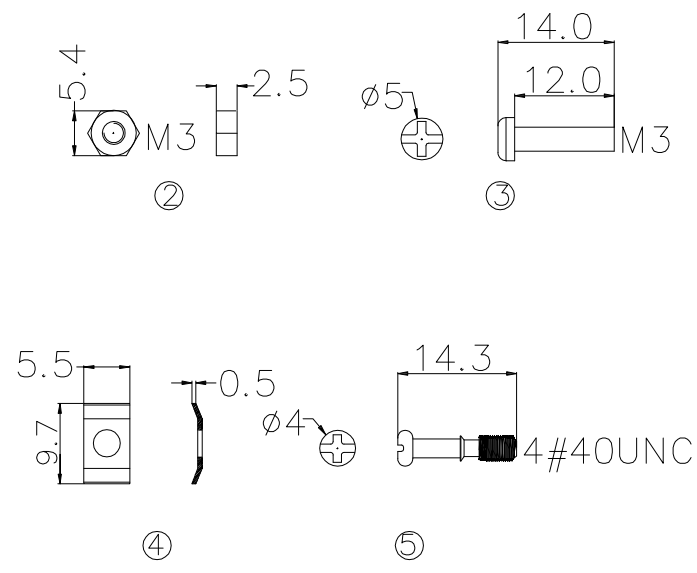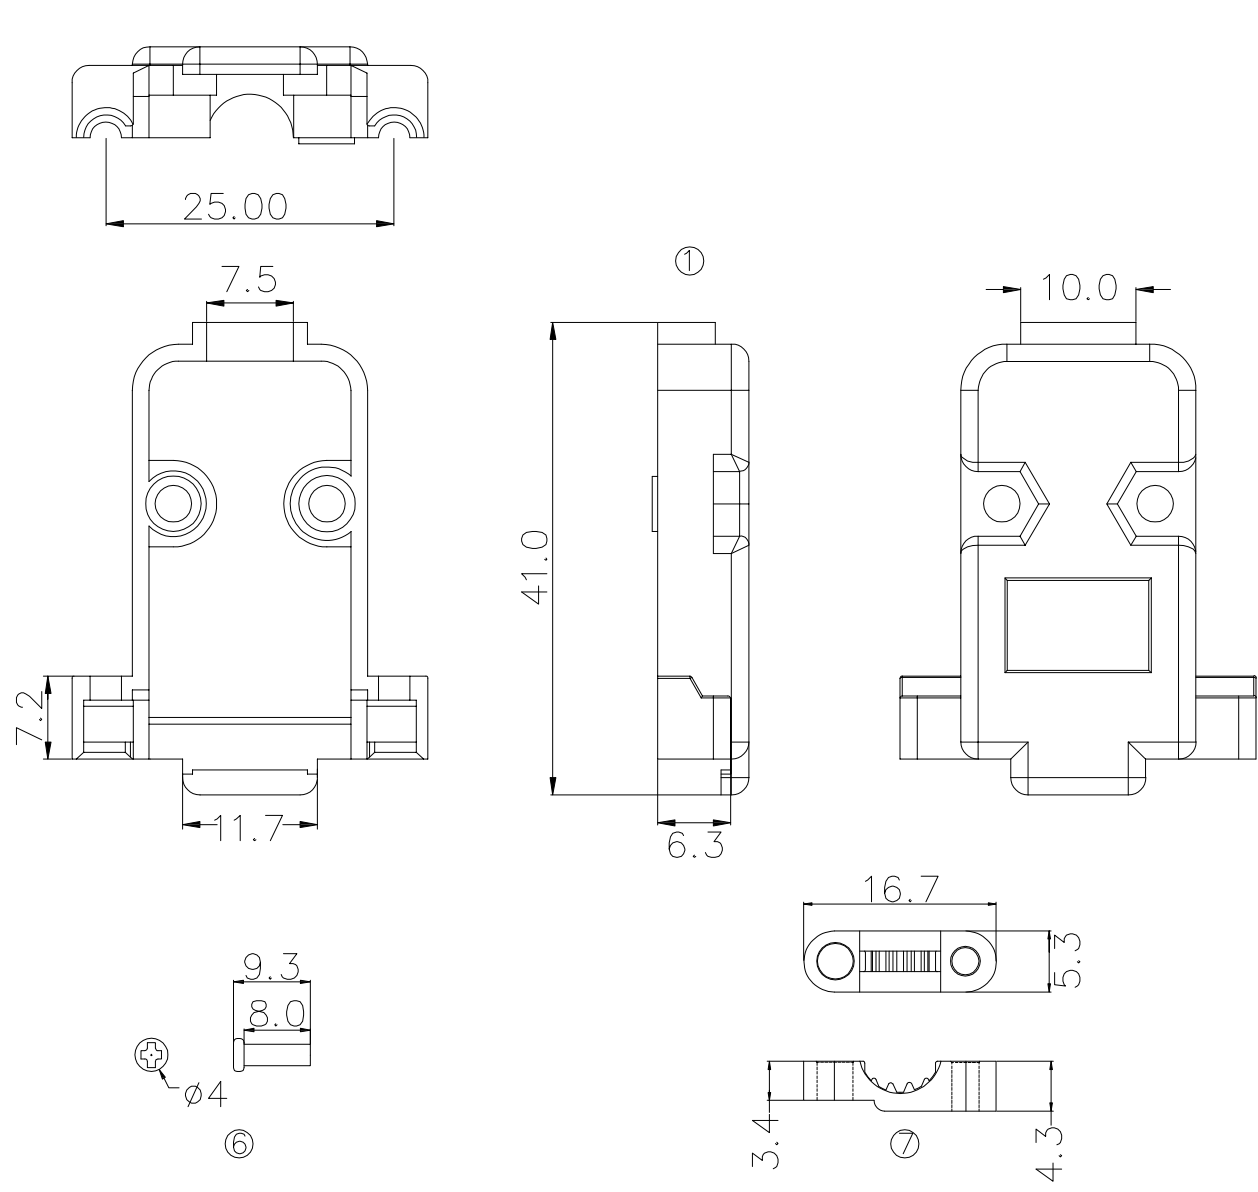

Part No.:
B05-009NX006-75
Color: _____
1: Black
2: Gray

7	Clip	synthetic resin	Color:red	2pcs
6	Clip screw	Spcc	Plating:Ni	2pcs
5	Screw	Steel	Plating:Ni	2pcs
4	Gaskets	Steel	Plating:Ni	2pcs
3	screw 14.0mm	Steel	Plating:Ni	2pcs
2	Nut	Steel	Plating:Ni	2pcs
1	Hood	ABS	Color:see part no.	1set
Item	Desc.	Material	Remarks	Quantity

A					QUALITY SYMBOLS	Tolerance	NAME:	D-SUB 9pin solderless connector plastic hood,short screw				PART NO.	B05-009N1006-75	
					: :	x. ±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B05-254
		2021/12/19	First edition release		CRITICAL MAJOR	.x ±0.50	SCALE:	N:1	DATE:	2021/12/19	Qiang Liao	Shuo Cao		
					: :	.xx ±0.30	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							
	SIDE	DATE	DESCRIPTION		APPROVER	ZERO DEFECT S.P.C								
8		7		6	5	4	3		2		1			