

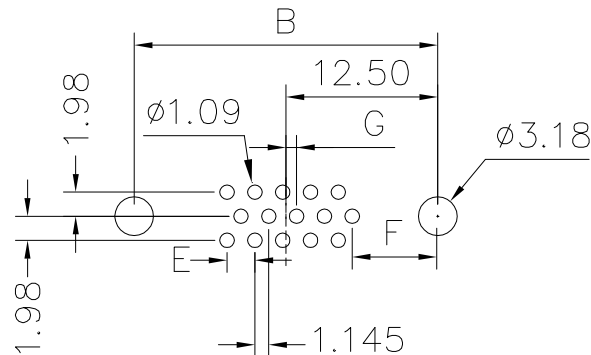
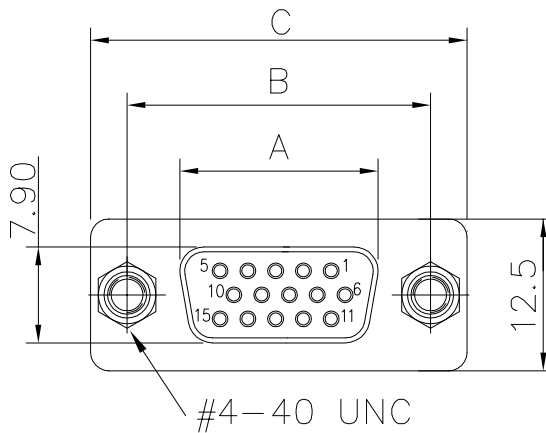




PCB layout

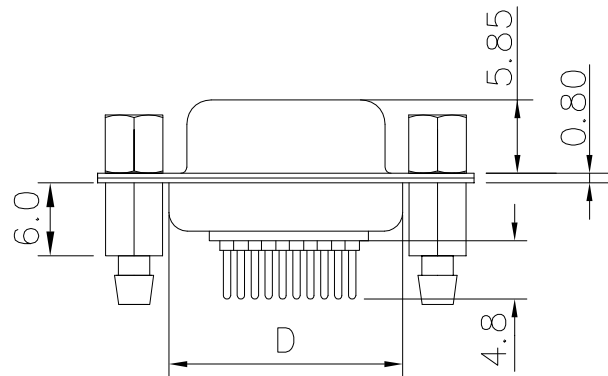

Pin No.	A	B	C±0.38	D	E	F	G
15	16.33	24.99	30.81	19.3	2.29	7.04	0.25
26	24.66	33.32	39.14	27.5	2.29	6.88	0.51
44	38.38	47.04	53.04	41.3	2.29	6.88	0.51
62	54.84	63.50	69.32	57.7	2.41	7.00	0.58

Current rating: 5A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part No.:

B04-0XX8X1XD-02
No. of contact: _____
15: 15pos
26: 26pos
44: 44pos
62: 62pos
Housing color: _____
1: Black
5: White
6: Blue
Terminal plating: _____
4: Ful gold 2u"
5: Ful gold 1u"

6	Screw	Steel	Palting: Ni
5	Board lock	Copper alloy	Palting: Ni
4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Palting: see part no.
Item	Desc.	Material	Remarks

△	2024/10/23	Added dimension marking	Jack Chen
△	2022/04/07	Changed temperature range	Jack Chen
△	2021/08/13	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: □: MAJOR
CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25
⊕ ⊖

NAME:	HD.D-SUB machined pin female vertical	PART NO.	B04-0XX8X1XD-02
REV:	C	UNIT:	mm
SCALE:	N:1	DATE:	2021/08/13
DRW BY	Huangmei	CHK BY	Jack Chen
APP BY		DRAWING NO.	B04-062
Lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770			