


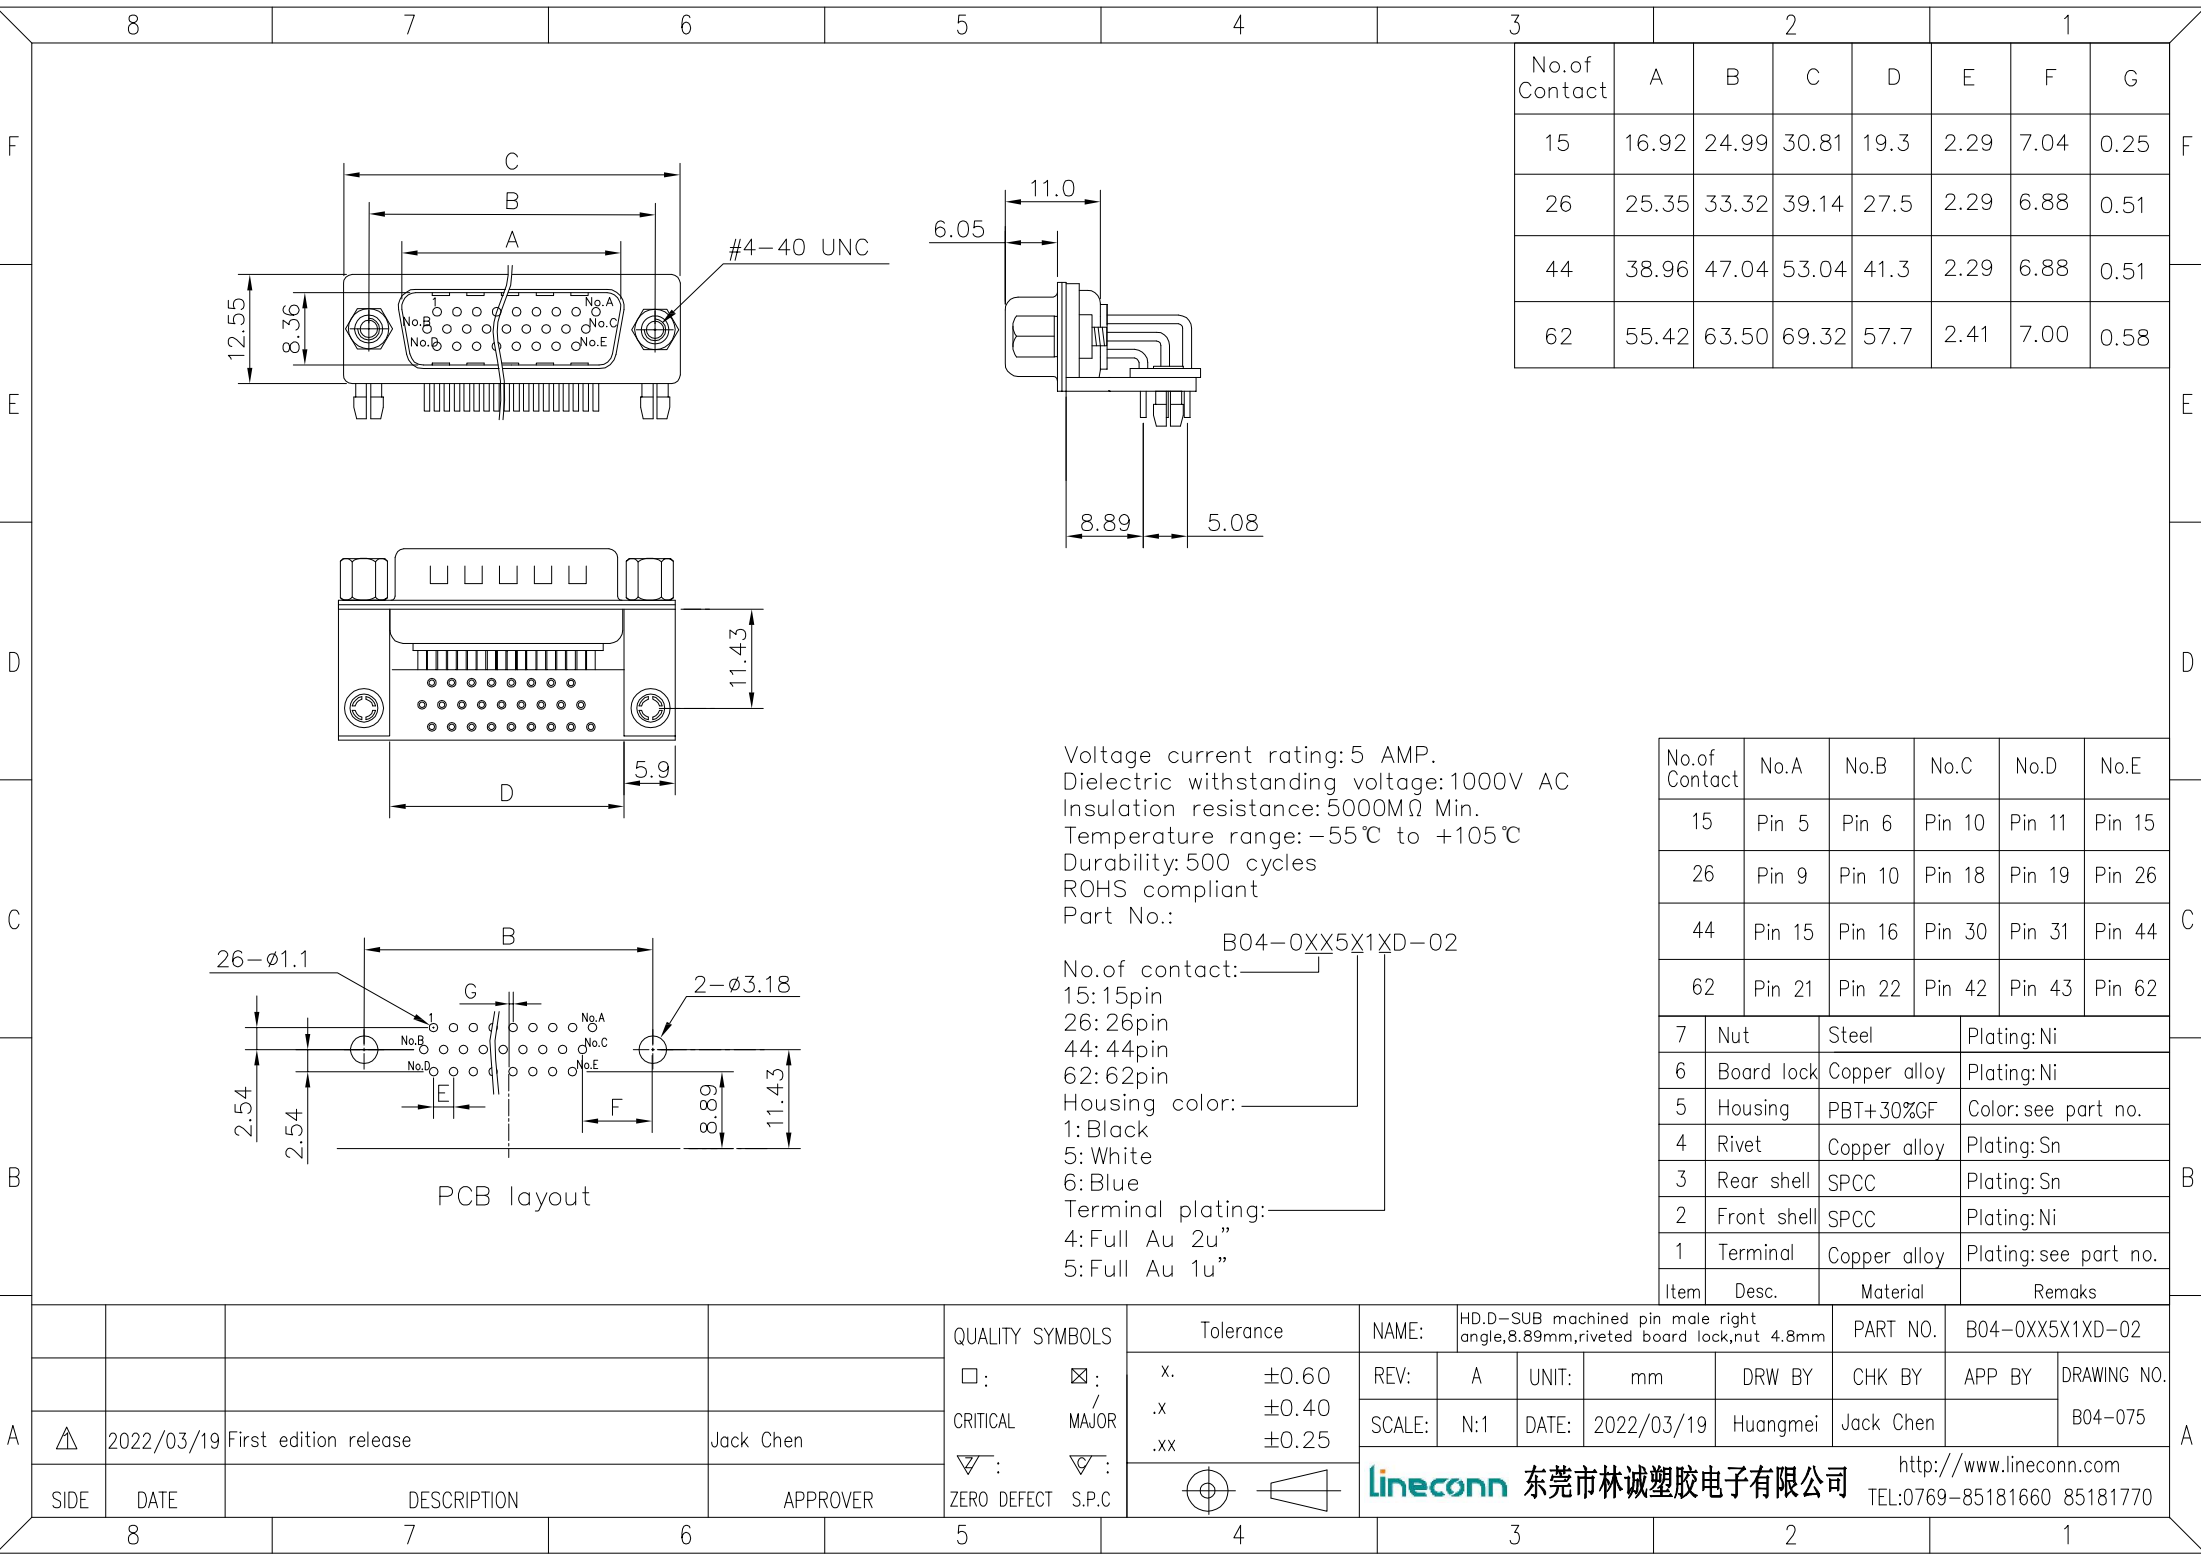

No. of Contact	A	B	C	D	E	F	G
15	16.92	24.99	30.81	19.3	2.29	7.04	0.25
26	25.35	33.32	39.14	27.5	2.29	6.88	0.51
44	38.96	47.04	53.04	41.3	2.29	6.88	0.51
62	55.42	63.50	69.32	57.7	2.41	7.00	0.58

No. of Contact	No. A	No. B	No. C	No. D	No. E
15	Pin 5	Pin 6	Pin 10	Pin 11	Pin 15
26	Pin 9	Pin 10	Pin 18	Pin 19	Pin 26
44	Pin 15	Pin 16	Pin 30	Pin 31	Pin 44
62	Pin 21	Pin 22	Pin 42	Pin 43	Pin 62

7	Nut	Steel	Plating: Ni
6	Board lock	Copper alloy	Plating: Ni
5	Housing	PBT+30%GF	Color: see part no.
4	Rivet	Copper alloy	Plating: Sn
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remarks

QUALITY SYMBOLS		Tolerance		NAME:		HD.D-SUB machined pin male right angle,8.89mm,riveted board lock,nut 4.8mm			PART NO.		B04-0XX5X1XD-02	
□:	☒:	X.	±0.60	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
CRITICAL	MAJOR		.X	±0.40	SCALE:	N:1	DATE:	2022/03/19	Huangmei	Jack Chen		B04-075
			.XX	±0.25								
▽:	▽:			lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com			
ZERO DEFECT	S.P.C								TEL:0769-85181660 85181770			