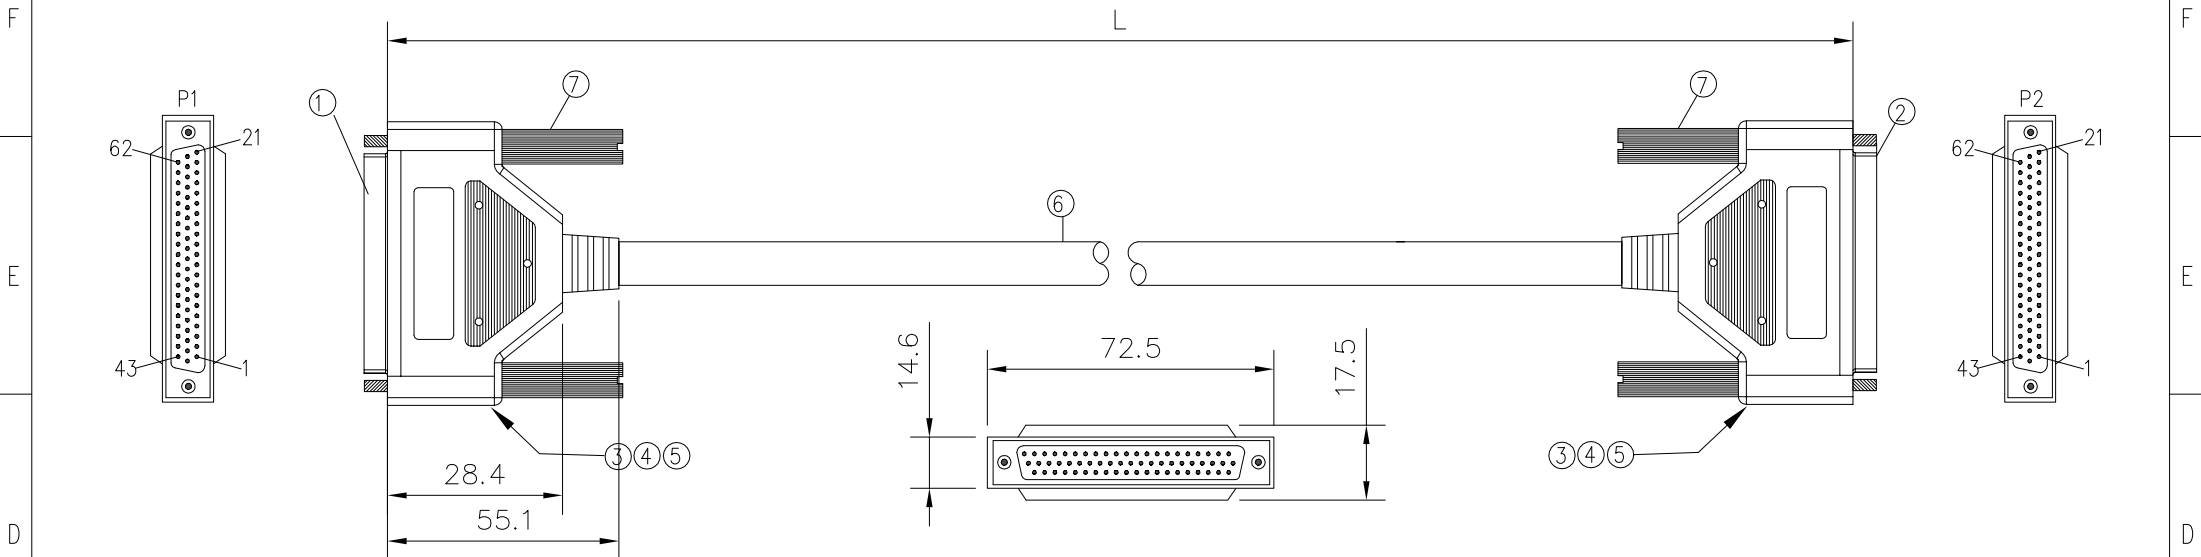


Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part number description: A04-06221XXX-01
XXX: 001=length: 10cm

7	Screw	Screw 4-40# Ni(big E33 black)	4pcs
6	Cable	UL20276 28AWG*31P+AEB PVC jacket color:black OD=10.0mm	1pcs
5	Copper foil	Copper foil W=25mm	NA
4	Over mold	45P PVC color: black	NA
3	Inside mold	PE	NA
2	Connector	HD.D-SUB 62pin female solder,black	1pcs
1	Connector	HD.D-SUB 62pin female solder,black	1pcs
Item	Part name	Description	QY'T

A					QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance Length(mm) Tolerance(mm) 300~2000 ±50 2001~5000 ±100 5001~ ±150		NAME: HD.D-SUB 62pin female to female cable		PART NO. A04-06221XXX-01	
		2024/10/24	Added dimensioning	Jack Chen				REV: B	UNIT: mm	DRW BY	CHK BY
		2015/09/02	First edition release	Jack Chen				SCALE: NONE	DATE: 2015/09/02	Qiang Liao	Jack Chen
	SIDE	DATE	DESCRIPTION	APPROVER				DRAWING NO. A04-011			