



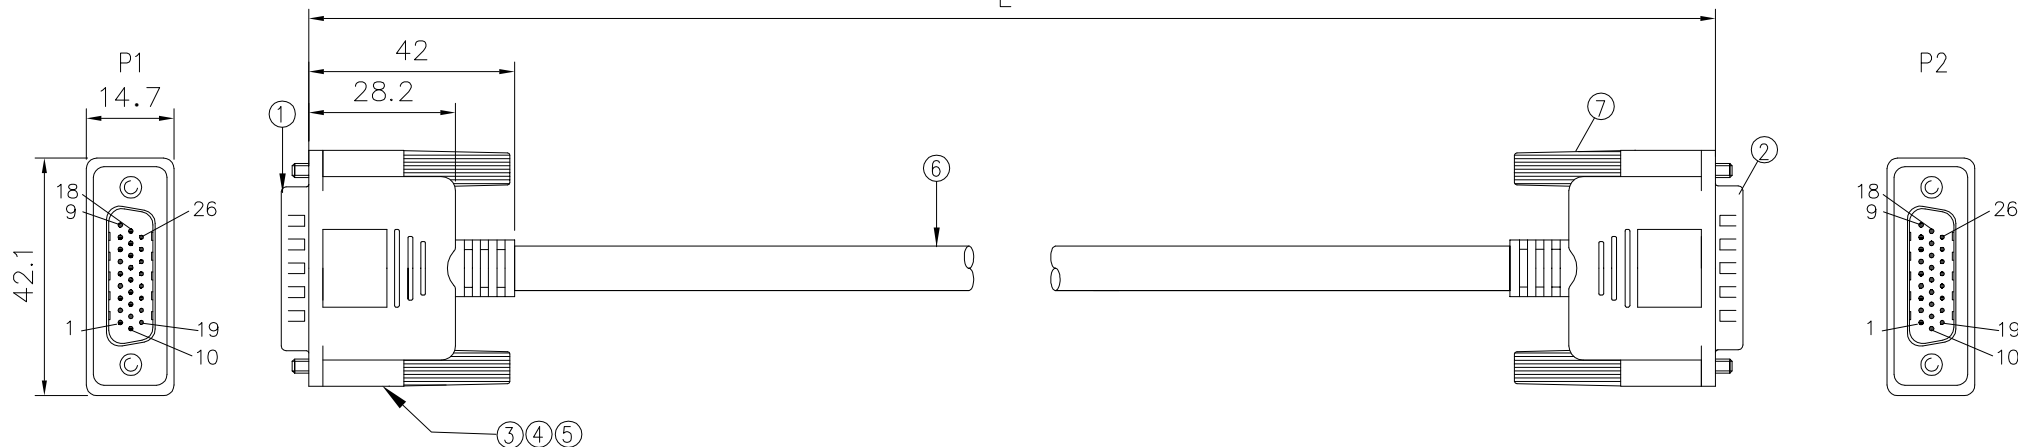

Pin assignment

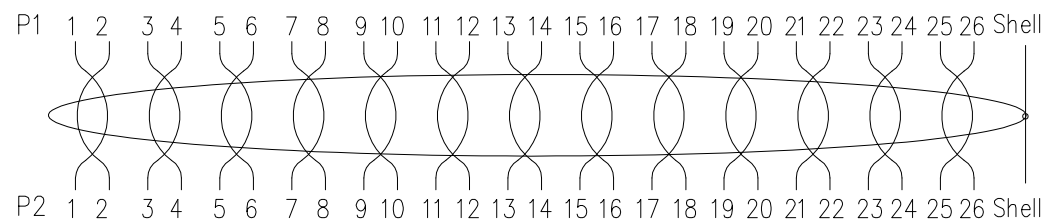

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5 ohms max.
- 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4.ROHS compliant
- 5.Part number description: A04-02611XXX-01, XXX: 001=length: 10cm

7	Screw	Screw 4-42# Ni	4PCS
6	Cable	UL2919 28AWG*13P+AED PVC jacket color:black OD 7.8mm	1PCS
5	Copper foil	Copper foil w=25mm	1PCS
4	Outside mold	45P PVC color: black	NA
3	Inner mold	PE	NA
2	Connector	HD.D-SUB 26pin male solder,housing color:black	1PCS
1	Connector	HD.D-SUB 26pin male solder,housing color:black	1PCS
Item	Part name	Description	QY'T

△	2021/03/11	Newly developed mold, changed shape	Jack Chen
△	2020/11/09	Change cable OD	Jack Chen
△	2018/05/24	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
Length(mm)	Tolerance(mm)
300~2000	±50
2001~5000	±100
5001~	±150

NAME:		HD.D-SUB 26pin male to 26pin male cable			PART NO.		A04-02611XXX-01	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	NONE	DATE:	2018/05/24	Qiang Liao	Jack Chen		A04-004	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com			
					TEL:0769-85181660 85181770			