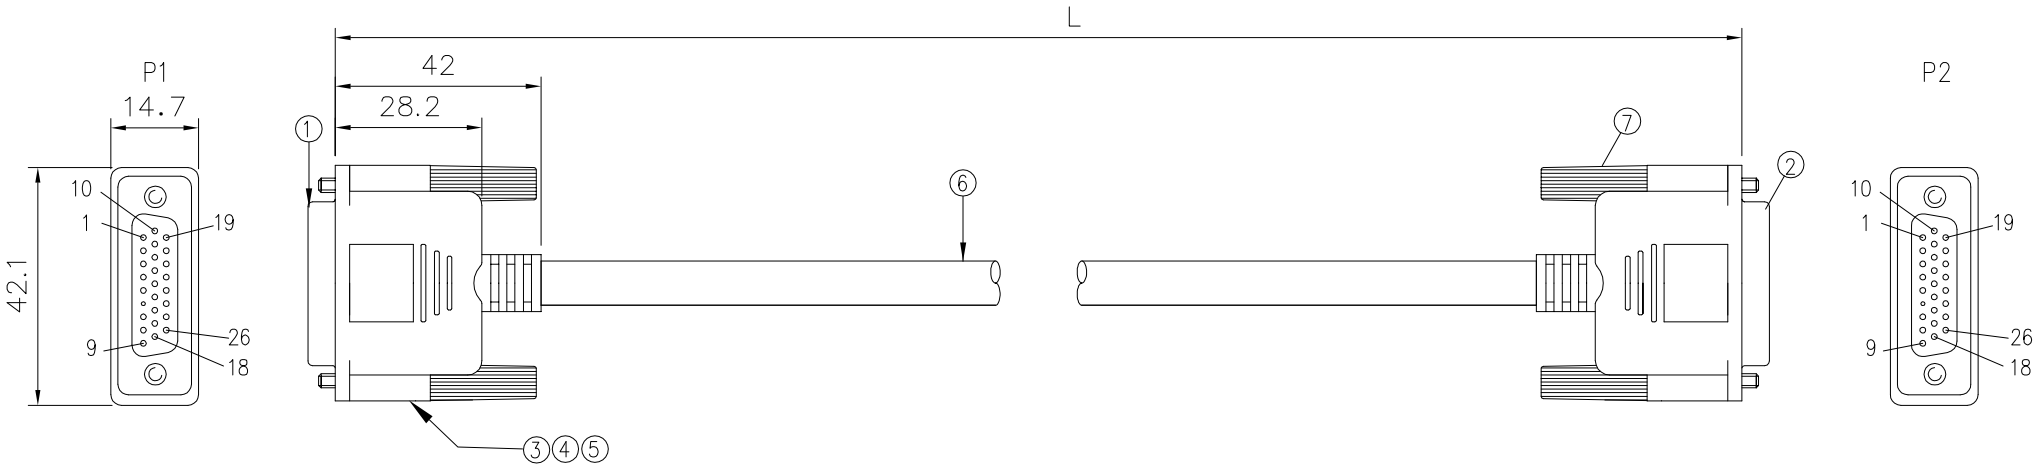

Pin assignment

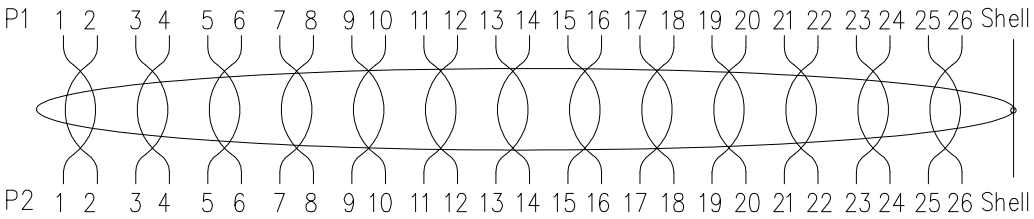

Notes:
1.Electrical test:100% open,short&miss wire test.
2.Conductor resistance:5 ohms max.
3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
4.ROHS compliant
5.Part number description:A04-02621XXX-01,
XXX:001=length:10cm

Item	Part name	Description	QY'T
7	Screw	Screw 4-42# Ni	4PCS
6	Cable	UL2919 28AWG*13P+AED PVC jacket color:black OD 7.8mm	1PCS
5	Copper foil	Copper foil w=25mm	1PCS
4	Outside mold	45P PVC color: black	NA
3	Inner mold	PE	NA
2	Connector	HD.D-SUB 26pin female solder,housing color:black	1PCS
1	Connector	HD.D-SUB 26pin female solder,housing color:black	1PCS

SIDE	DATE	DESCRIPTION	APPROVER
A4	2021/03/11	Newly developed mold, changed shape	Jack Chen
A3	2020/11/09	Change cable OD	Jack Chen
A1	2018/05/24	First edition release	King Zhou

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Tolerance

Length(mm)	Tolerance(mm)
300~2000	±50
2001~5000	±100
5001~	±150

NAME:	HD.D-SUB 26pin female to 26pin female cable				PART NO.	A04-02621XXX-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	NONE	DATE:	2018/05/24	Qiang Liao	Jack Chen		A04-005

lineconn 东莞市林诚塑胶电子有限公司
http://www.lineconn.com
TEL:0769-85181660 85181770