
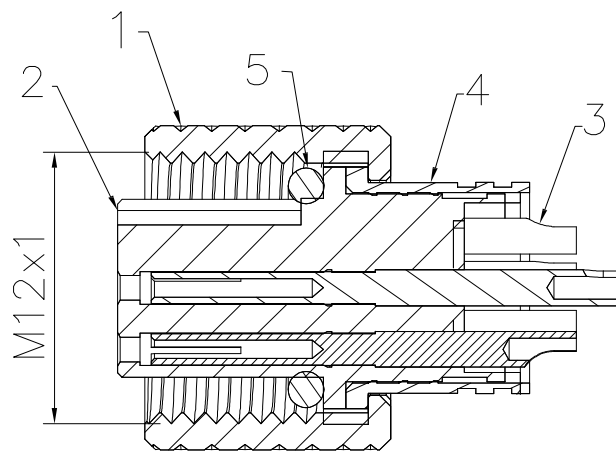
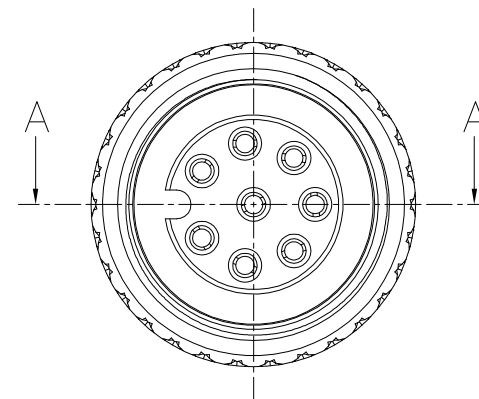
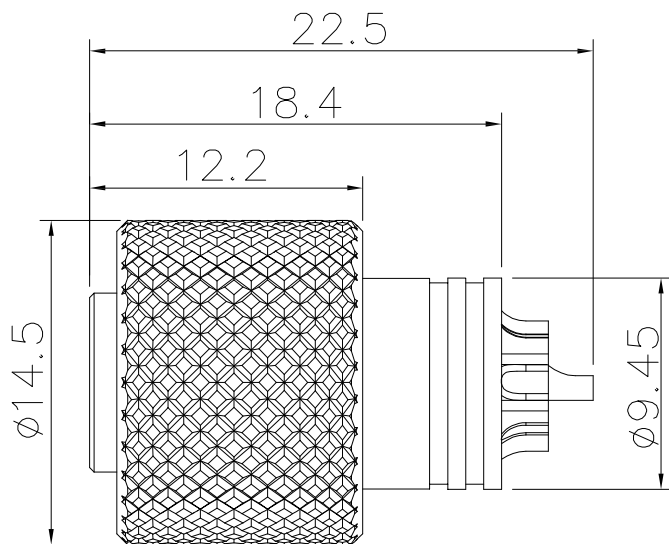


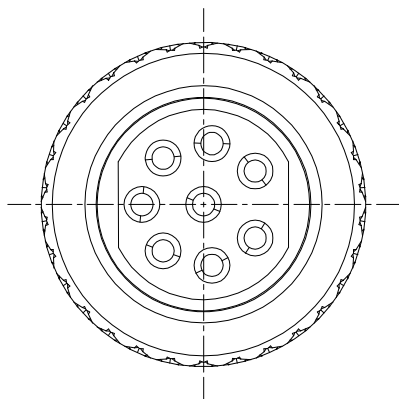

Section A-A

Current rating: 4A
 Rated voltage: 250V
 Contact resistance: 3mΩ Max.
 Durability: 500 cycles
 Temperature range: -45℃ to +105℃
 Waterproof rating: IP67
 ROHS compliant

5	Seals	NBR	Color: black
4	Shield	Copper alloy	Plating: Ni
3	Contact	Copper alloy	Plating: Au
2	Housing	PA	Color: black
1	Shell	Copper alloy	Plating: Ni
Item	Desc.	Material	Remark

△	2017/04/03	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C	 	

NAME:	M12 8P A coding female solder with shield				PART NO.	B10-M120T08A-02	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2017/04/03	Huangmei	Jack Chen		B10-020
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		