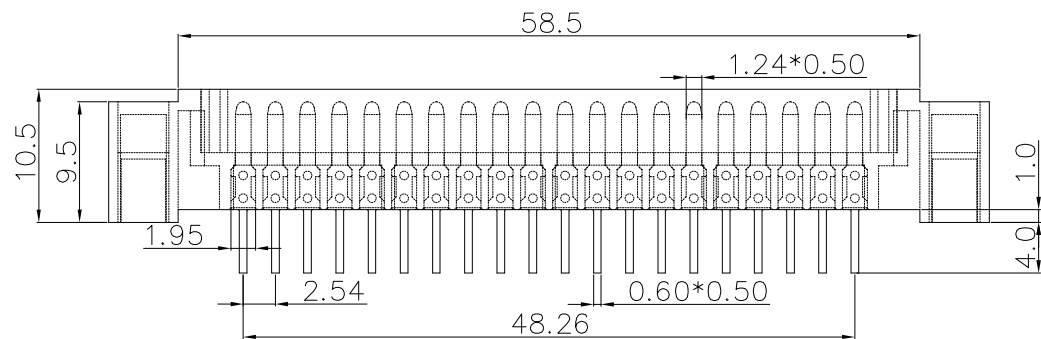
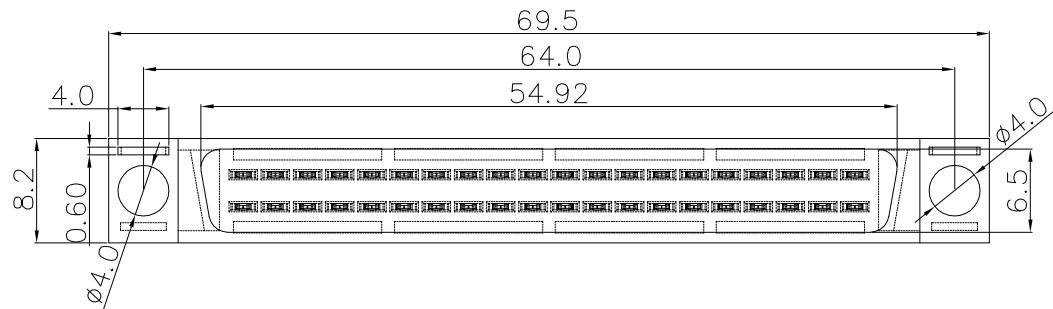


Voltage current rating: 3 AMP.
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min
Contact Resistance: 35mΩ/Max.
Temperature range: -45℃ to +105℃

3	Nut	Copper alloy	
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Plating: gold flash/Tin
Item	Desc.	Material	Remaks

△			
△			
△	2021/04/21	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	FCN 40pin male vertical for PCB				PART NO.	B01-04071NA4-02	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2021/04/21	Huangmei	Jack Chen		B01-068
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com		
					TEL:0769-85181660 85181770		