

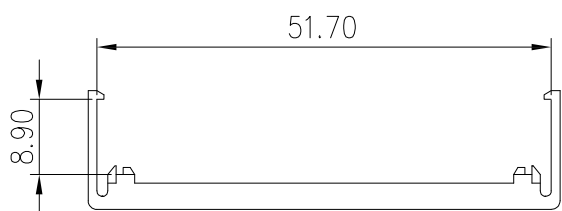
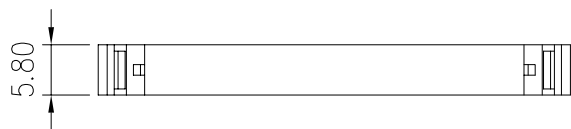


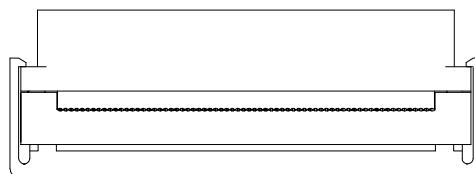


Cover

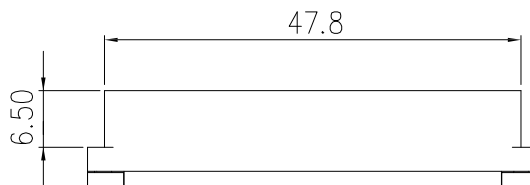

Strain relief

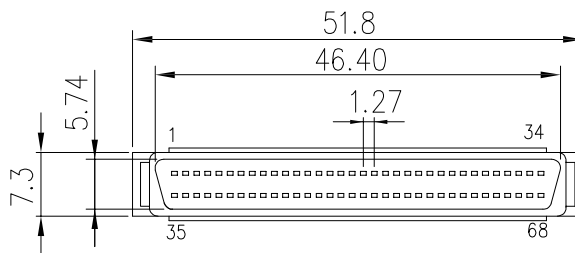

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -55℃ to +125℃
ROHS compliant

3	Cover	PBT+G.F.30% (UL 94V-0)		Color: black	
2	Housing	PBT+G.F.30% (UL 94V-0)		Color: black	
1	Terminal	Phosphor bronze		Contact area: Au 5u" Solder area: Sn Under-plating: Ni	
Item	Desc.	Material		Remark	


△	2021/09/07	Changed the part number	Shuo Cao
△	2015/06/24	Change tolerance	Dean Fan
△	2013/03/12	First edition release	Dean Fan

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:	HPDB 68pin male all plastic IDC for flat cable				PART NO.	B02-06811NEN-00		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2013/03/12	Huangmei	Shuo Cao		B02-048	

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------