



View A

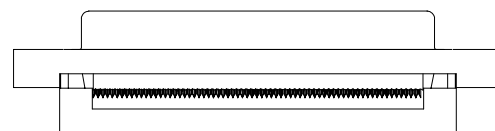

S type



Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω max.
Temperature range: -25 $^{\circ}$ C to +85 $^{\circ}$ C
ROHS compliant
Part No.:

B02-068218EC-AX

Bracket finishes:-

L: latch bracket

S: screw bracket

4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/06/29	Changed the part number	Shuo Cao	QUALITY SYMBOLS	Tolerance	NAME:	HPDB 68pin female IDC for flat cable,with support frame				PART NO.	B02-068218EC-AX	
△	2018/04/02	Add View-A	Jack Chen	□ : ☒ :	x. ±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2011/10/19	First edition release	Jing Li	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2011/10/19	Huangmei	Shuo Cao		B02-036
				▽ : ▽ :	.xx ±0.25	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL: 0769-85181660 85181770							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	 								

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770