
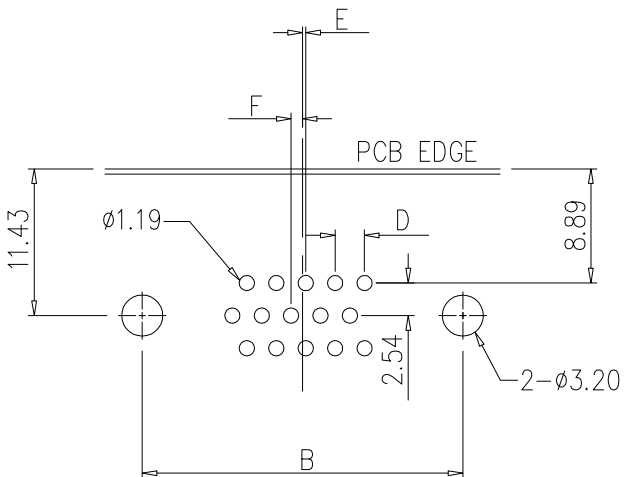
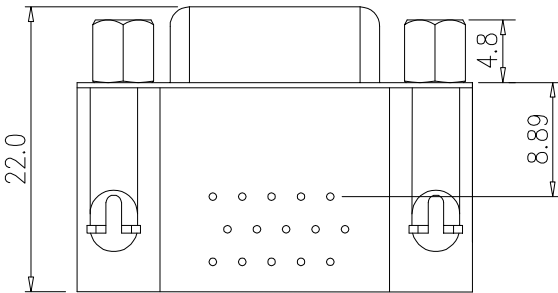
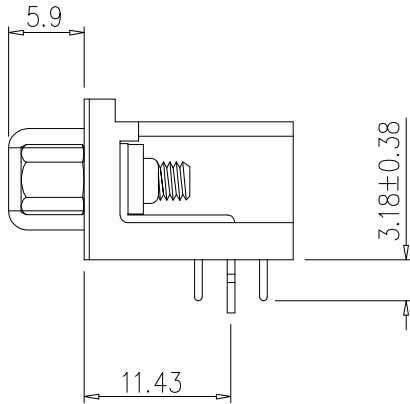


8		7		6		5		4		3		2		1		
										No.of contact	A	B	C	D	E	F
										15	16.33	24.99	30.81	2.29	0.25	0.89
										26	24.66	33.32	39.14	2.29	0.51	0.64
										44	38.38	47.04	53.04	2.29	0.51	0.64
										62	54.84	63.50	69.32	2.29	0.58	0.62

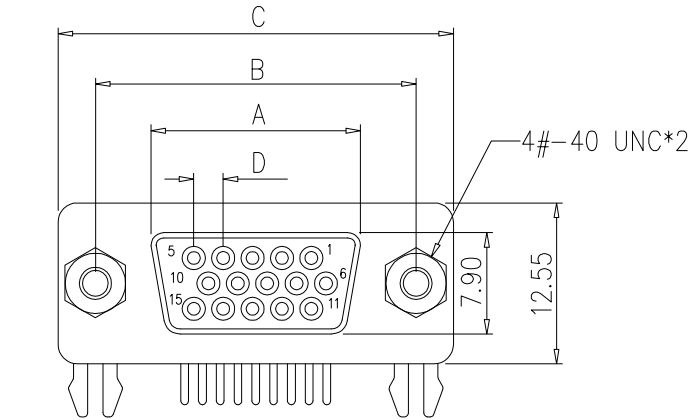

Current rating: 3A
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

B04-0XX611AD-F4
No.of contacts: _____
15: 15pos
26: 26pos
37: 37pos
62: 62pos

6	Rivet	Copper alloy	Palting: Ni
5	Screw	Steel	Palting: Ni
4	Board lock	SPCC	Palting: Sn
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Palting: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/07/24	Change part number	Shuo Cao
△	2017/06/11	Change the board lock material	Jing Li
△	2011/03/07	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	.x	±0.60
CRITICAL MAJOR		.x	±0.40
ZERO DEFECTS.P.C		.xx	±0.25

NAME:		HD.D-SUB female right angle 8.89mm, riveting board lock,lock 4.8mm screw			PART NO.		B04-0XX611AD-F4	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/03/07	Huangmei	Shuo Cao		B04-016	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL: 0769-85181660 85181770			