


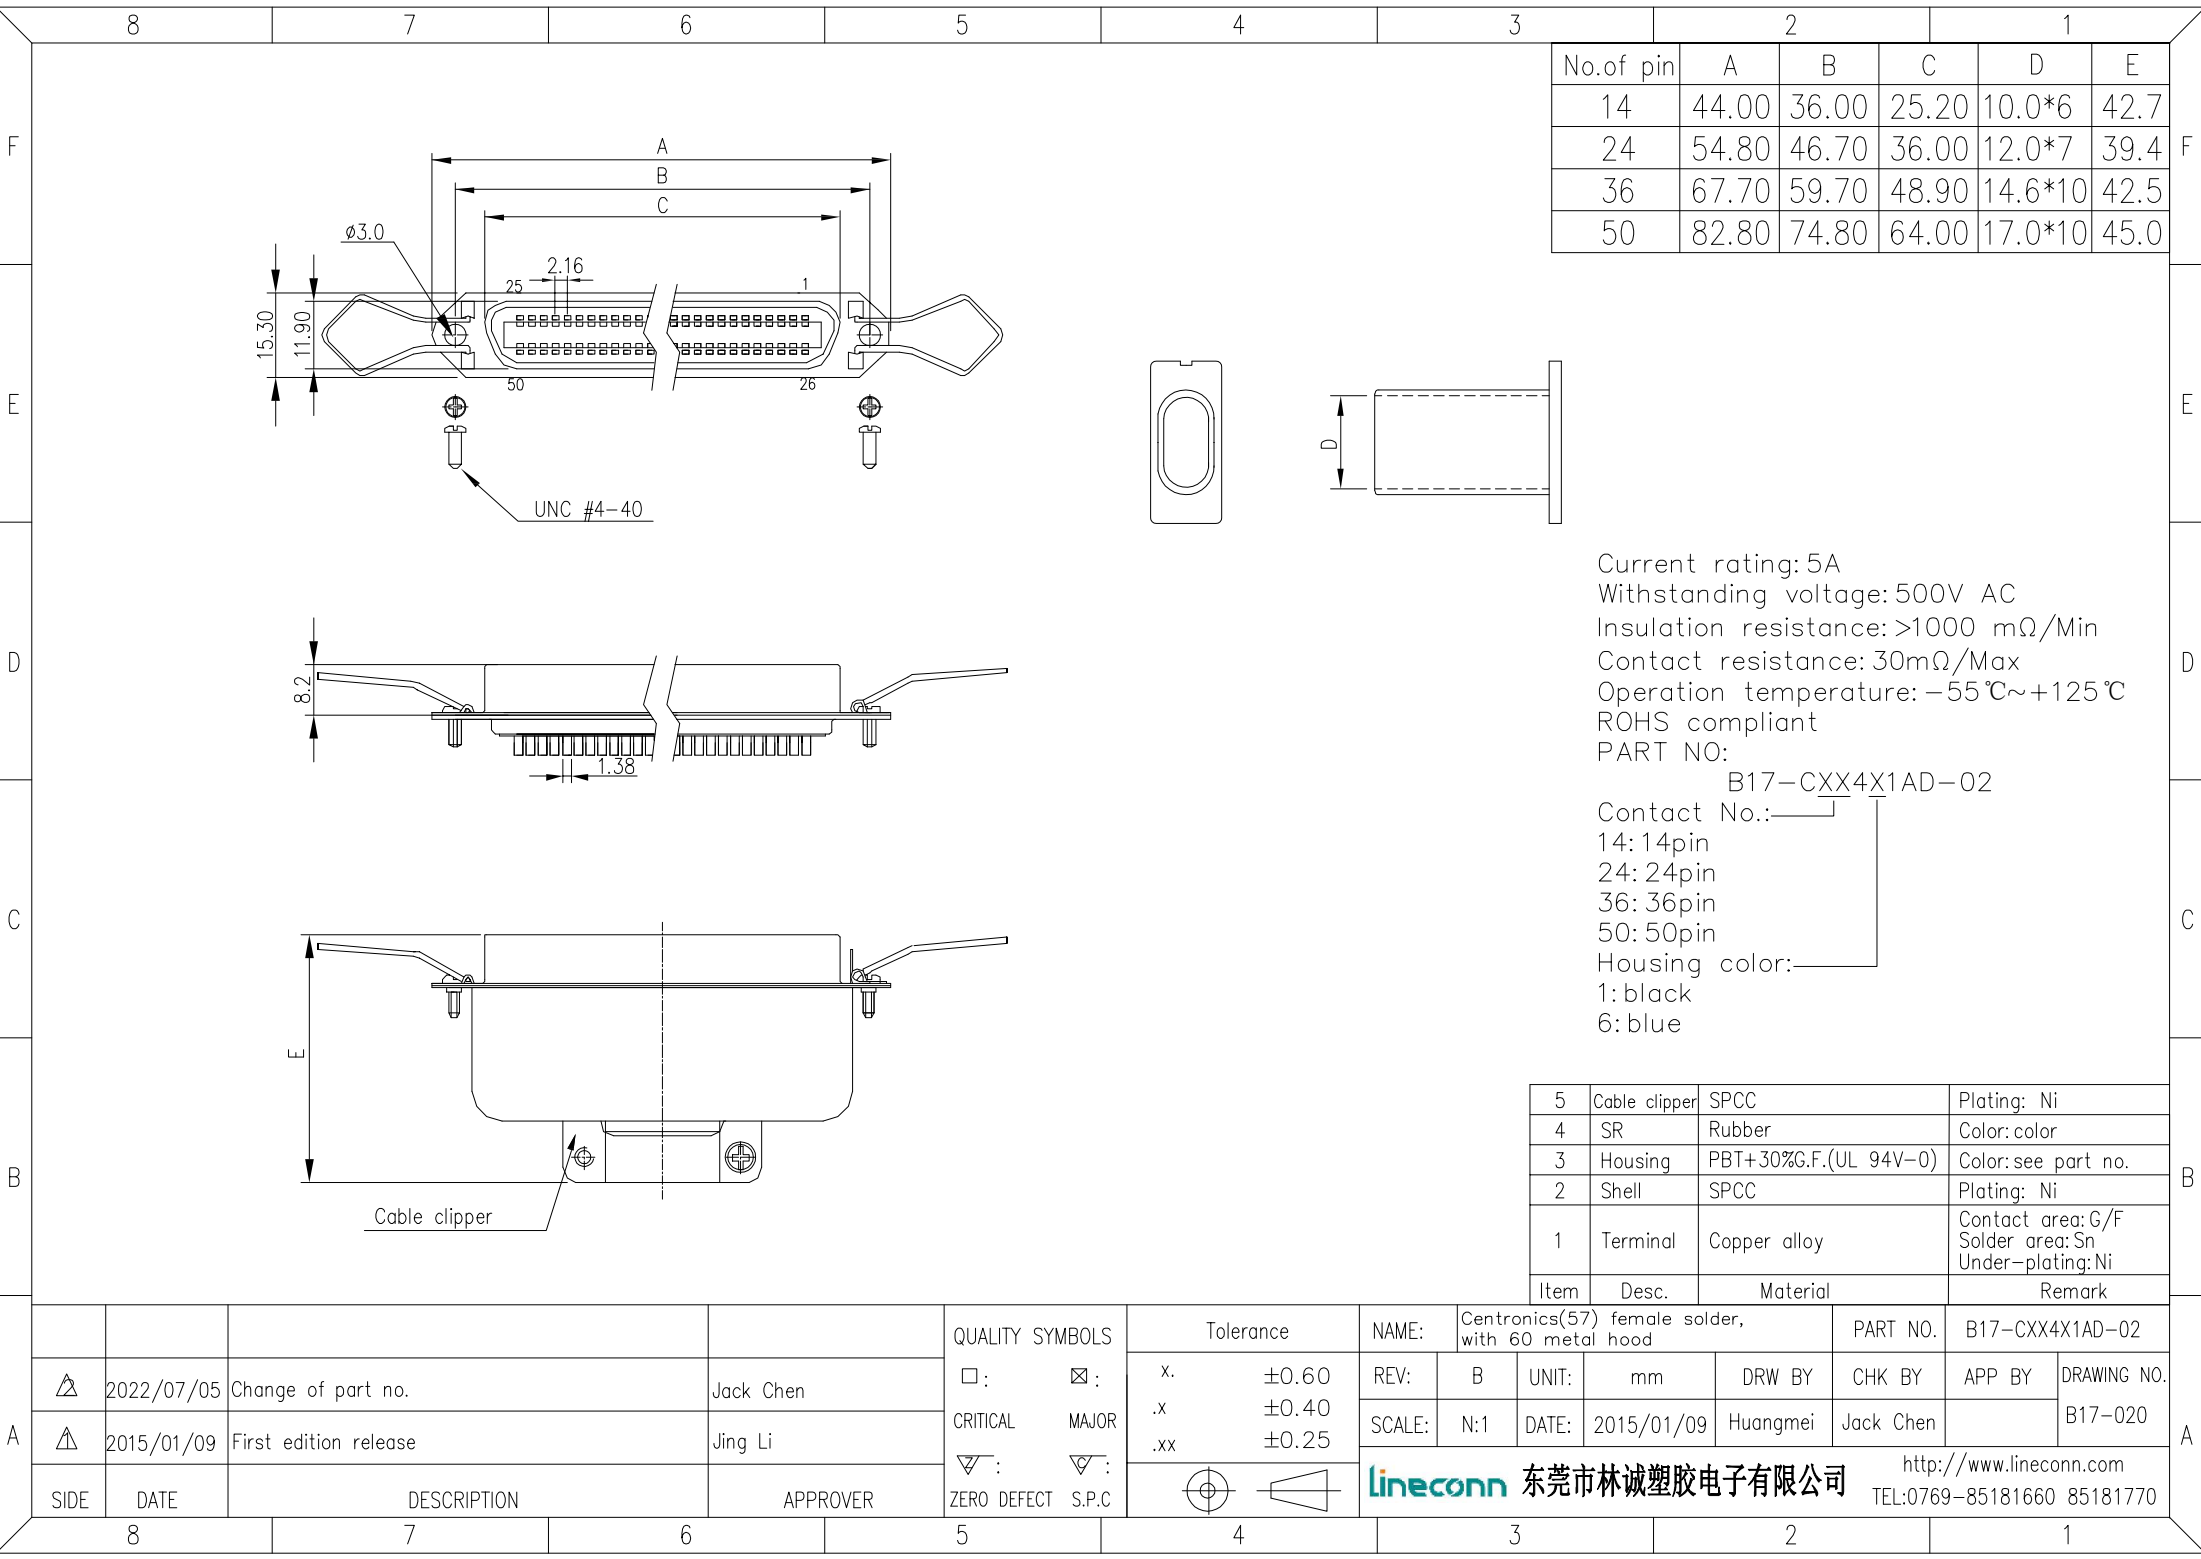

No.of pin	A	B	C	D	E
14	44.00	36.00	25.20	10.0*6	42.7
24	54.80	46.70	36.00	12.0*7	39.4
36	67.70	59.70	48.90	14.6*10	42.5
50	82.80	74.80	64.00	17.0*10	45.0

Current rating: 5A
Withstanding voltage: 500V AC
Insulation resistance: >1000 mΩ/Min
Contact resistance: 30mΩ/Max
Operation temperature: -55℃~+125℃
ROHS compliant
PART NO:

B17-CXX4X1AD-02

Contact No.:
14: 14pin
24: 24pin
36: 36pin
50: 50pin
Housing color:
1: black
6: blue

5	Cable clipper	SPCC	Plating: Ni
4	SR	Rubber	Color: color
3	Housing	PBT+30%G.F.(UL 94V-0)	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS		Tolerance		NAME: Centronics(57) female solder, with 60 metal hood		PART NO. B17-CXX4X1AD-02	
A		2022/07/05	Change of part no.	Jack Chen			x. ±0.60	REV: B	UNIT: mm	DRW BY	CHK BY
		2015/01/09	First edition release	Jing Li	CRITICAL	MAJOR	.x ±0.40	SCALE: N:1	DATE: 2015/01/09	Huangmei	APP BY
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	.xx ±0.25				
								lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com	
										TEL:0769-85181660 85181770	