


Positions	A±0.3	B±0.35	C±0.35	D±0.35	E±0.25	F±0.25
14	25.3	37.9	15.8	6*9.7	17.45	25.44
24	36.0	49.0	15.8	8*11.7	28.35	36.24
36	49.3	61.6	15.8	10*15	41.35	49.2
50	64.2	77.1	16	8*18.5	56.35	64.32

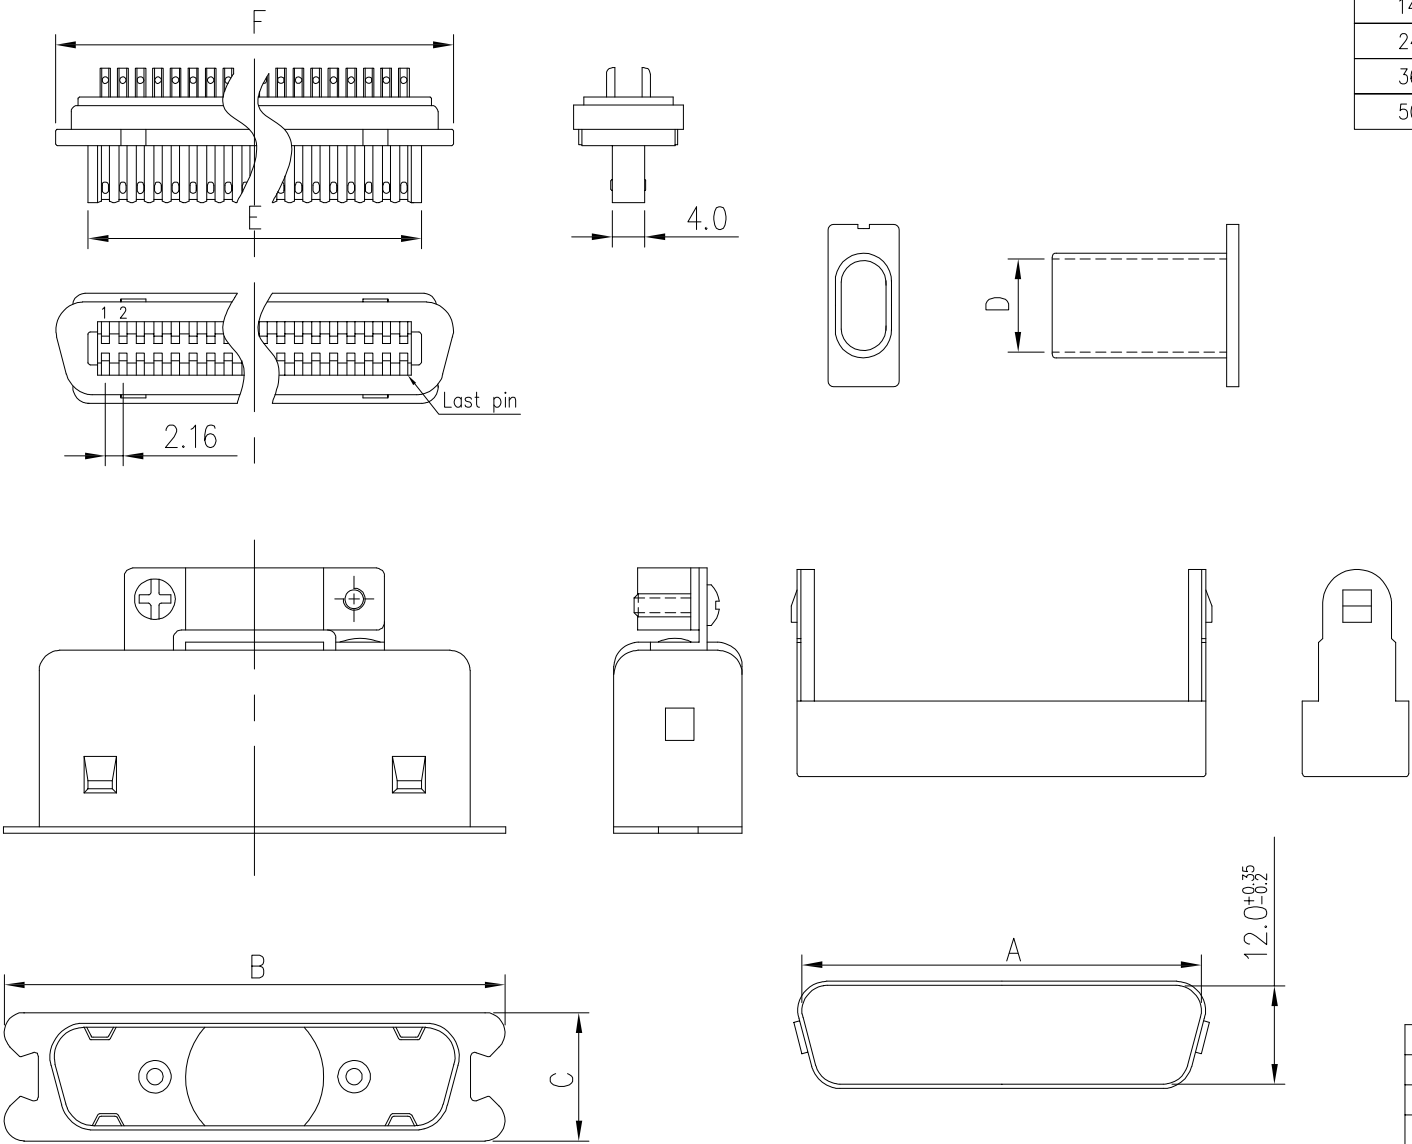

Current rating: 5A
Withstanding voltage: 500V AC
Insulation resistance: >1000 mΩ/Min
Contact resistance: 30mΩ/Max
Operation temperature: -55℃~+125℃
ROHS compliant
PART NO:

B17-CXX3X1AF-02
Contact No.:
14: 14pin
24: 24pin
36: 36pin
50: 50pin
Housing color:
1: black
6: blue

4	SR	Rubber	Color: color
3	Housing	PBT+30%G.F.(UL 94V-0)	Color: see part no.
2	Shell	SPCC	Over-plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance		NAME:		Centronics(57) traditional male solder, with 30 metal hood			PART NO.		B17-CXX3X1AF-02	
△	2022/07/05	Change of part no.	Jack Chen	□ : ☒ :	x.	±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	△	2014/09/21	First edition release	Jing Li	CRITICAL MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2014/09/21	Huangmei	Jack Chen		
						.xx	±0.25							B17-018	
SIDE	DATE	DESCRIPTION	APPROVER	▽ : ▽ :			lineconn 东莞市林诚塑胶电子有限公司						http://www.lineconn.com		
				ZERO DEFECT S.P.C									TEL:0769-85181660 85181770		