
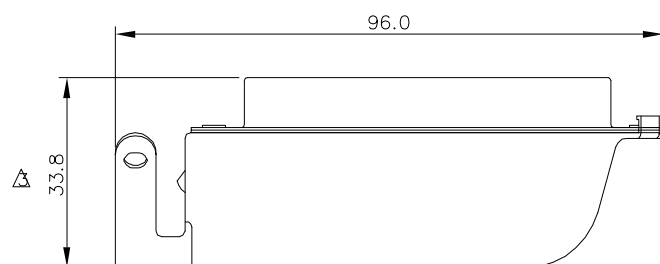
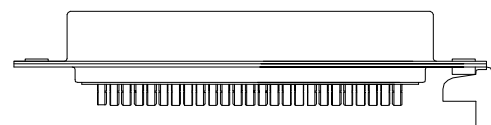


Current rating: 5A
Withstanding voltage: 500V AC
Insulation resistance: >1000 mΩ/Min
Contact resistance: 30mΩ/Max
Operation temperature: -55℃~+125℃
ROHS compliant
Part No.:

Figure No.: B17-0504X1AM-0X

Housing color: 1: Black
6: Blue

Exit hole: A: Exit hole at 1pin
B: Exit hole at 25pin

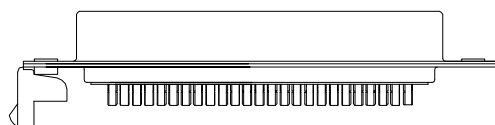

6	Screws	Steel	Plating: Ni
5	Hood	Steel	Plating: Ni
4	Rear shell	Steel	Plating: Ni
3	Front shell	Steel	Plating: Ni
2	Housing	P.B.T UL94V-0	Color: see part no.
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

	2022/12/09	Add Exit hole,Change part number	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		Centronics(57) 50pin female solder, with metal hood right angle exit			PART NO.		B17-0504X1AM-0X	
	2022/11/29	Change the size of the iron casing	Jack Chen		x. ±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2012/07/12	First edition release	Jing Li		.x ±0.40	SCALE:	N:1	DATE:	2012/07/12	Huangmei	Jack Chen		B17-017		
					.xx ±0.25										
SIDE	DATE	DESCRIPTION	APPROVER		 		 东莞市林诚塑胶电子有限公司						http://www.lineconn.com TEL:0769-85181660 85181770		

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770