
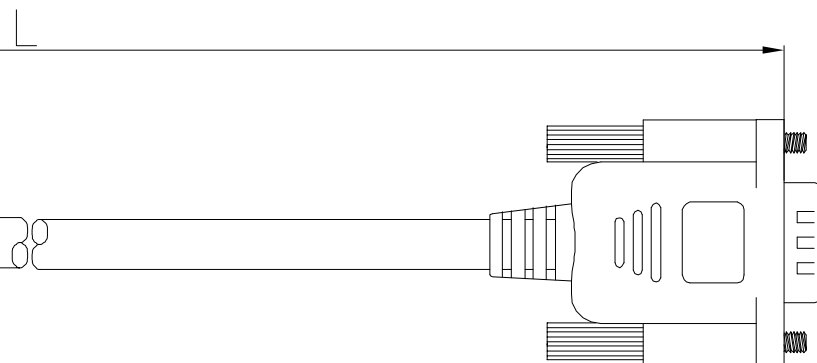
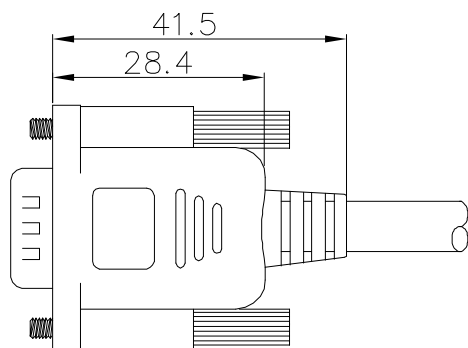





Pin assignment

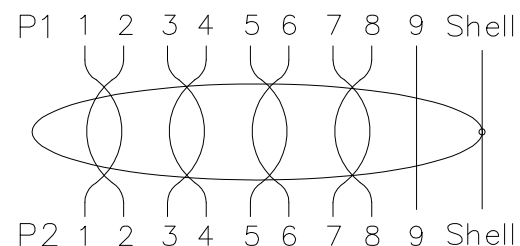

Notes:

- 1.Electrical test:100% open,short&miss wire test.
- 2.Conductor resistance:5 ohms max.
- 3.Insulator resistance: 1m ohms min, dc 300v 0.01sec.
- 4.ROHS compliant
- 5.Part no:

A05-0091X XXX-01

Cable color:

1:black

2:gray


Length:


001:100mm

010:1000mm

6	Cable	UL2464 24AWG*4P+24AWG*1C+AED PVC jacket,color: see part number OD=6.5mm	1pcs
5	Screw	Screw 4-40# gray	4pcs
4	Over mold	45P PVC color: gray	1pcs
3	Inside mold	PE	NA
2	Connector	D-SUB 9pin male solder,housing color:black	1pcs
1	Connector	D-SUB 9pin male solder,housing color:black	1pcs
Item	Part name	Description	QY'T

△			
△	2021/08/07	Add cable color	Jack Chen
△	2017/04/21	First edition release	Jane Zhen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance		NAME:		D-SUB 9pin male to male cable			PART NO.		A05-0091XXXX-01	
□:	☒:	Length(mm)	Tolerance(mm)	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
		300~2000	±50									
		2001~5000	±100									
CRITICAL	MAJOR	5001~	±150	SCALE:	NONE	DATE:	2017/04/21	Huangmei	Jack Chen		A05-003	
▽:	▽:			 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770				
ZERO DEFECT		S.P.C										



Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770