

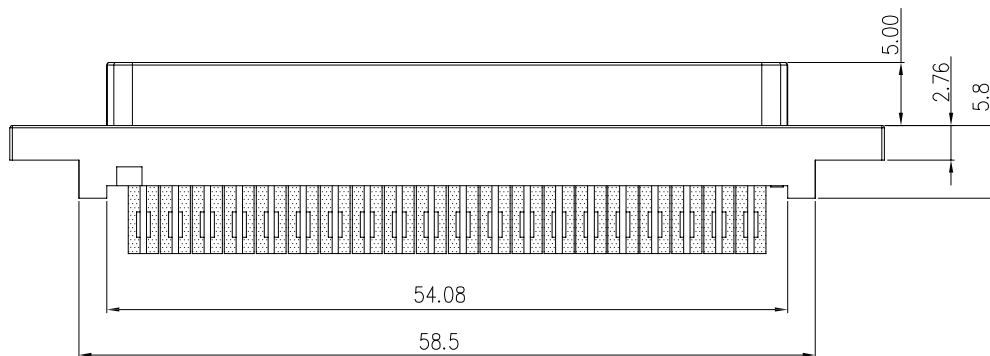
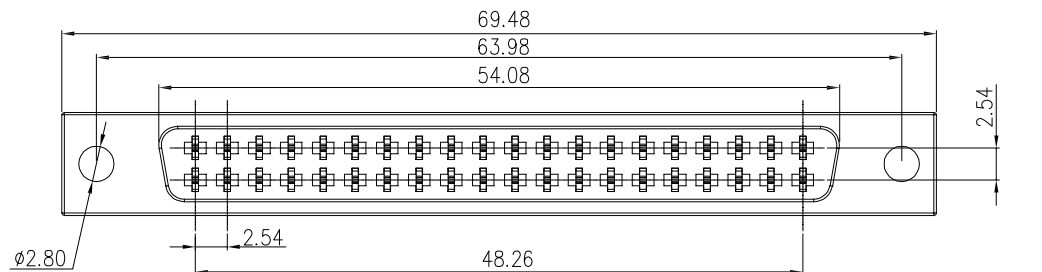




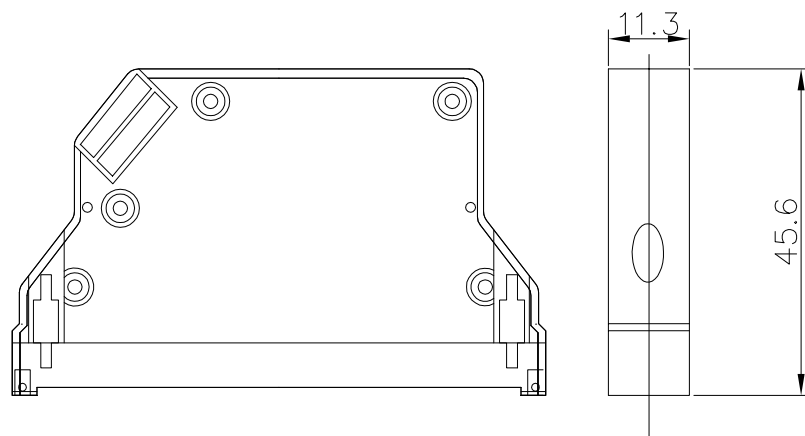


Voltage current rating: 3 AMP.
 Dielectric withstanding voltage: 500V AC
 Insulation resistance: 500M Ω Min
 Contact Resistance: 35m Ω /Max.
 Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
 ROHS compliant

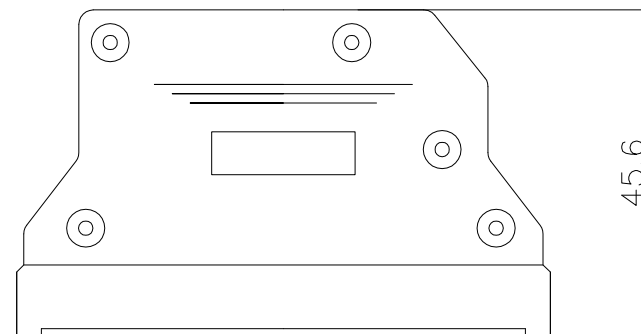

2	Housing	PBT+30%GF	Color:black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

A					QUALITY SYMBOLS	Tolerance		NAME:	FCN 40pin female solder			PART NO.	B01-04041NA0-01		
		2021/04/11	Change tolerance	Jack Chen			x. ± 0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
		2019/11/23	First edition release	Jack Chen			.x ± 0.40	SCALE:	N:1	DATE:	2019/11/23	Huangmei	Jack Chen		B01-036
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C	.xx ± 0.25			东莞市林诚塑胶电子有限公司			http://www.lineconn.com TEL:0769-85181660 85181770		

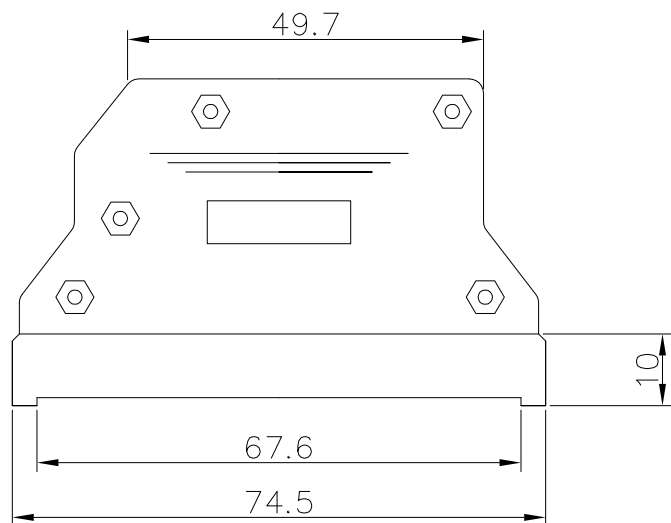

3	Nut	Steel	Plating: Ni
2	Scerw	Steel	Plating: Ni
1	Hood	ABS+30%GF	Color: black
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME: FCN 40pin female plastic hood,cable comes out the side				PART NO.		B01-040411NB-01					
						 :	 :	x.	±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	2021/12/24	First edition release	Jack Chen			CRITICAL	MAJOR	.x	±0.50	SCALE:	N:1	DATE:	2021/12/24	Huangmei	Jack Chen		B01-048
						 :	 :	.xx	±0.25	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com							
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT	S.P.C			TEL:0769-85181660 85181770									