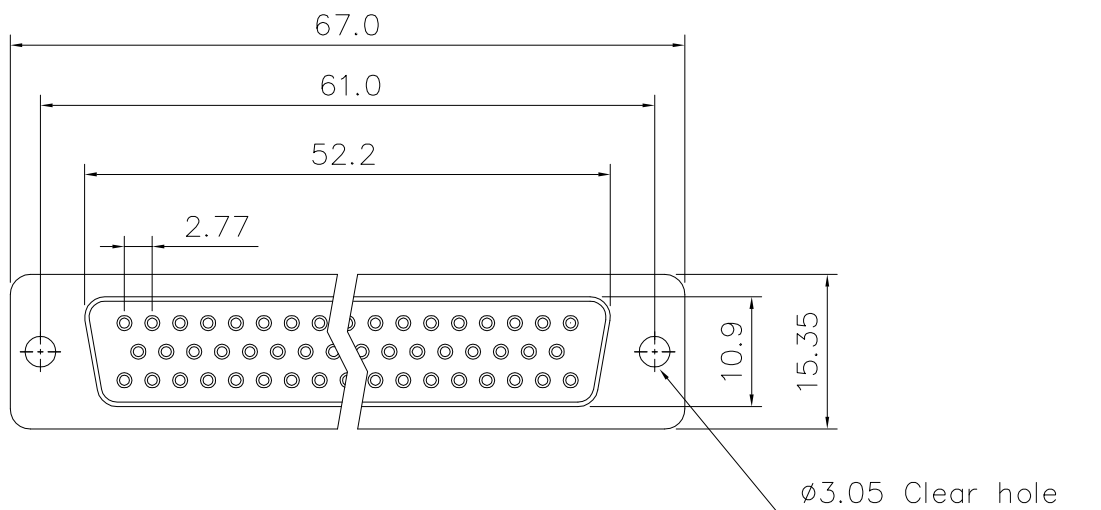



Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000M Ω Min.
Contact resistance: 30 m Ω max.
Temperature range: -55 $^{\circ}$ C to +105 $^{\circ}$ C
Durability: 500 cycles
ROHS compliant

Part No.: B05-0504X1XN-02

Housing color: _____
1: Black
5: White
6: Blue
Terminal plating: _____
4: Full Au 2u"
5: Full Au 1u"

4	Rear shell	SPCC	Palting: Sn
3	Front shell	SPCC	Palting: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

	2019/08/19	Add the terminal plating type	Shuo Cao
	2010/06/03	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance		NAME: D-SUB 50pin female solder,machined pin				PART NO.		B05-0504X1XN-02	
□:	☒:	x.	±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO B05-019
CRITICAL	MAJOR	.x	±0.40	SCALE:	N:1	DATE:	2010/06/03	Huang mei	Shuo Cao		
		.xx	±0.25								
▽:	▽:			 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			
ZERO DEFECT S.P.C											