


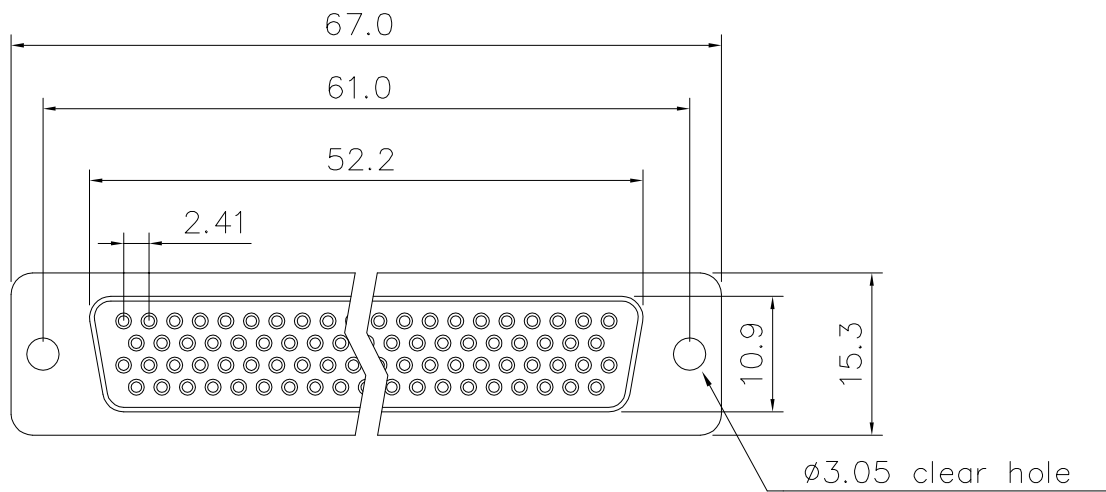

Current rating: 5 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 5000M Ω Min.
Contact resistance: 30 m Ω max.
Temperature range: -55 $^{\circ}$ C to +105 $^{\circ}$ C
Durability: 500 cycles
ROHS compliant

Part No.:

B04-0784X1XN-02

Housing color:

1: Black



5: White

6: Blue

Terminal plating:

4: Full Au 2u"

5: Full Au 1u"

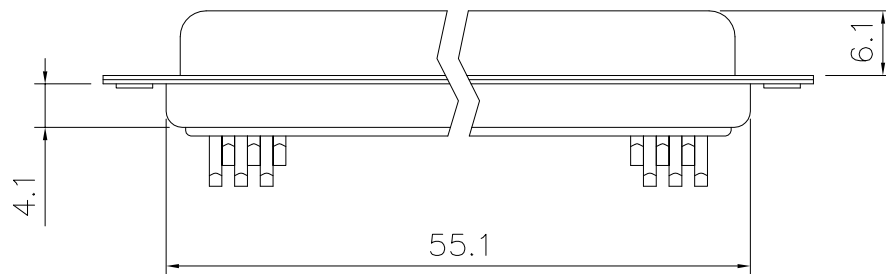

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: see part no.
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

	2022/05/22	Add the plating type of the terminal	Jack Chen
	2010/06/03	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS

:

CRITICAL MAJOR

:


ZERO DEFECT S.P.C

Tolerance

x. ± 0.60

.x ± 0.40

.xx ± 0.25



NAME:

HD.D-SUB 78pin female solder,machined pin

PART NO.

B04-0784X1XN-02

REV:

B

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2010/06/03

Huangmei

Jack Chen

B04-008

Lineconn 东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>

TEL:0769-85181660 85181770